

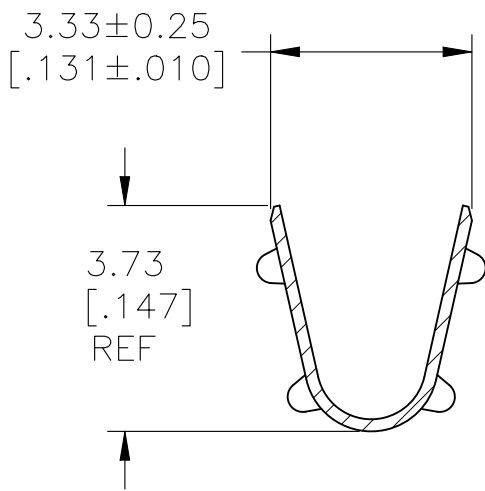


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		A1	RELEASED PER ECR-25-236673	12MAR25	PC	JH


- 1 WIRE RANGE 0.3-0.82mm2 [22-18 AWG]
- 2 INSULATION RANGE 1.50-3.10 [.060-.122]
- 3 FINISH: 0.76um MIN GOLD OVER 1.27um MIN NICKEL REQUIRED ON INNER SURFACE, PERMITTED ON OUTER SURFACE.
- 4 FINISH: 2.54um MIN PRE-TIN ON ALL SURFACES IN THIS AREA.
- 5 FINISH: 2.54um MIN PRE-TIN ALL OVER
- 6 PRELIMINARY - NOT FOR PRODUCTION
- 7 CONTACTS COATED WITH ANTI-FRETTING LUBRICANT

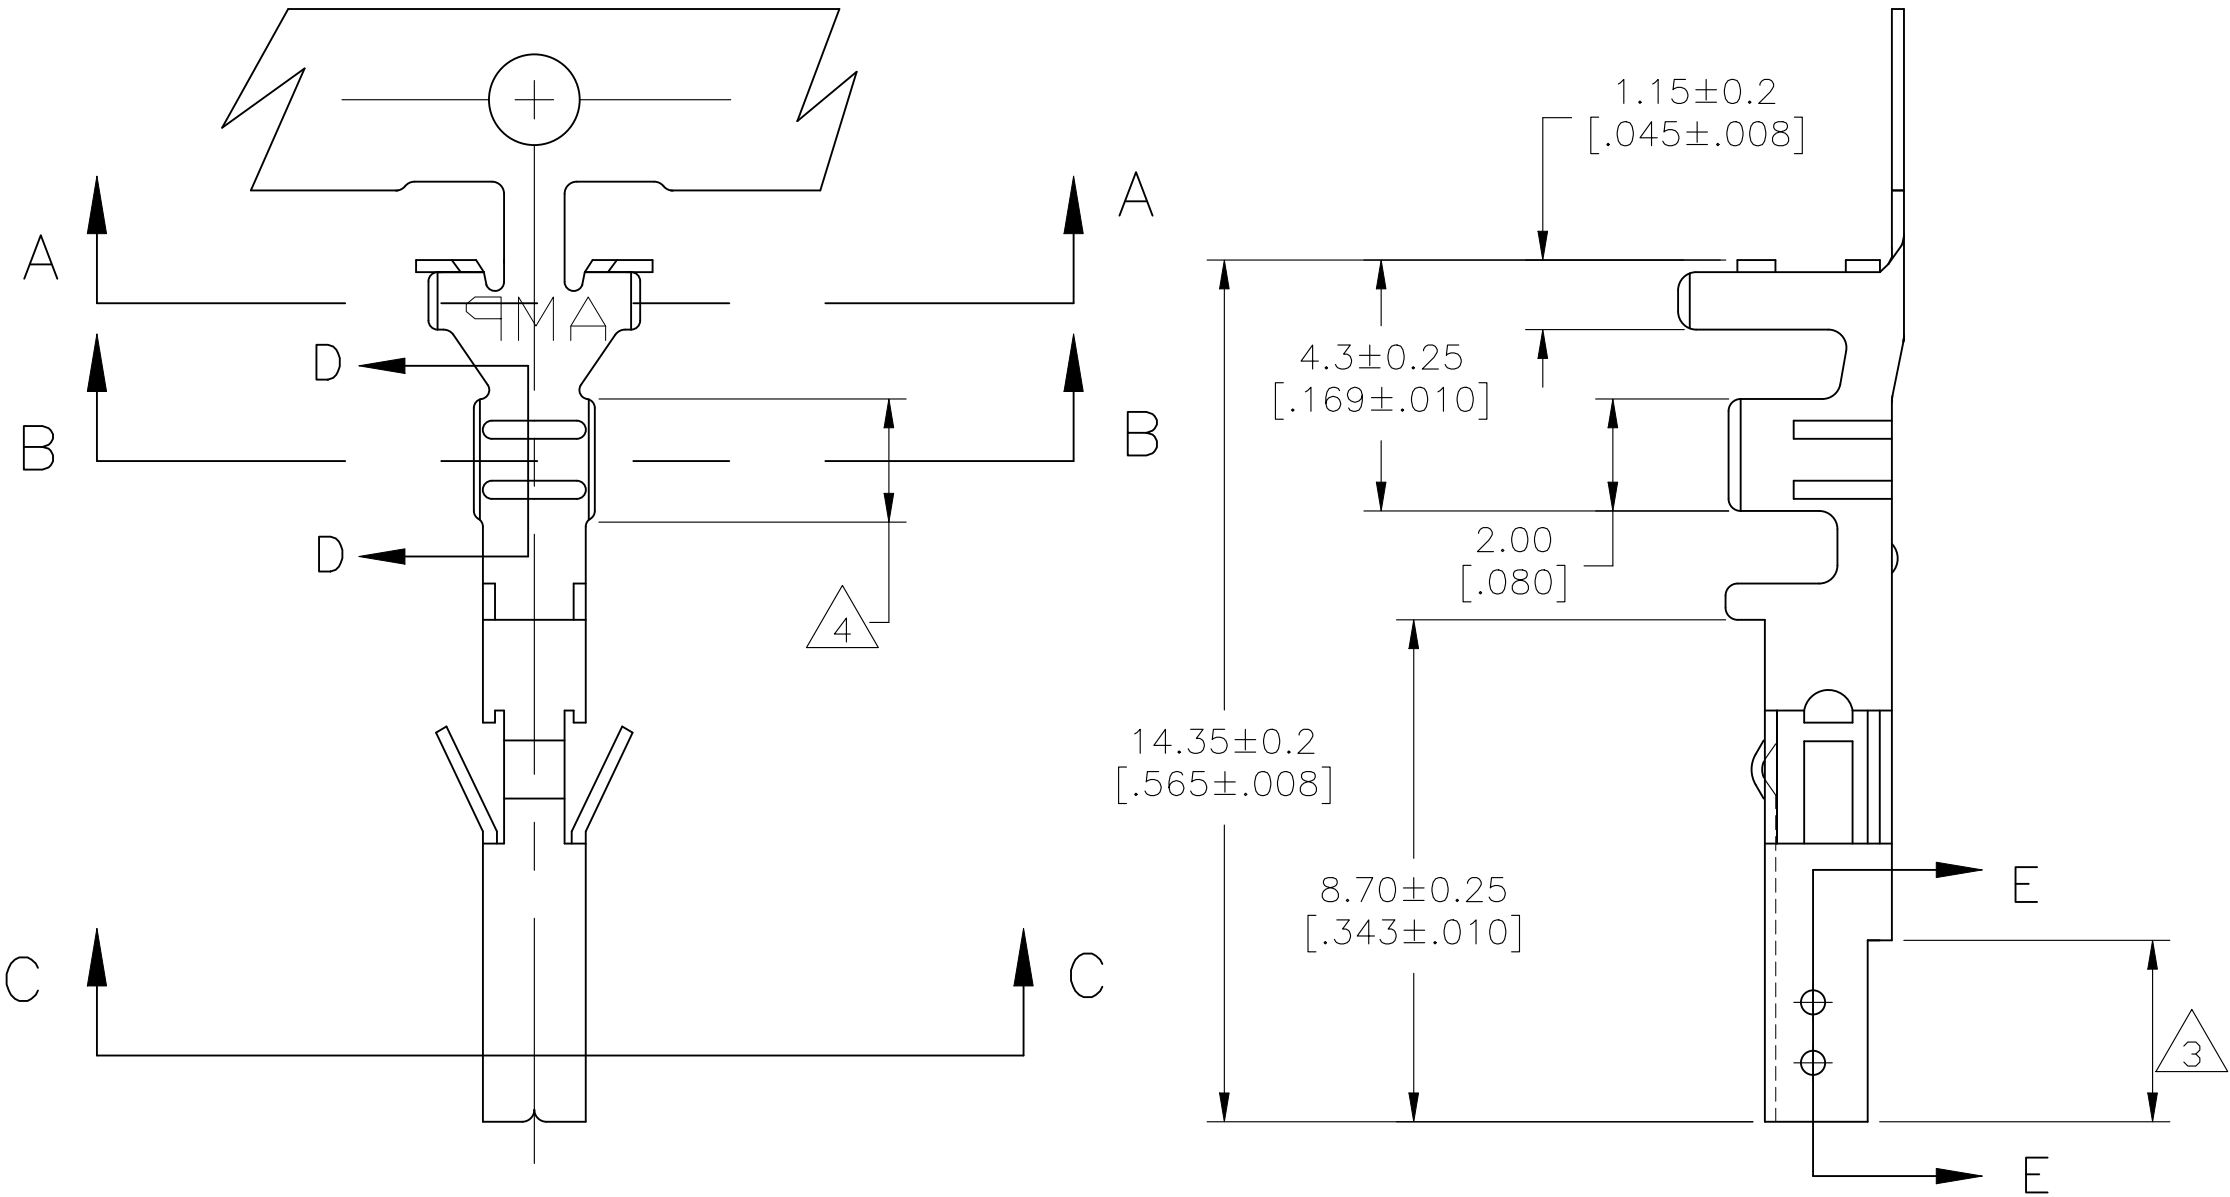

SECTION A-A

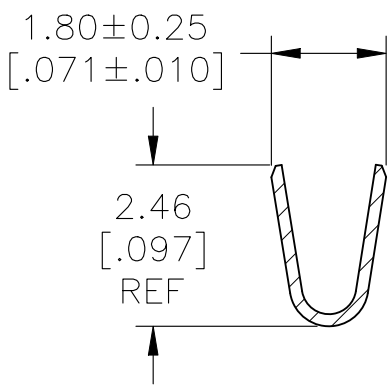

SECTION B-B

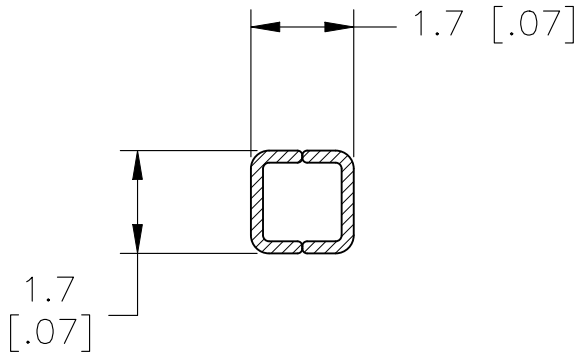

SECTION C-C

7 PRE-TIN 5	PHOS BRONZE	2238017-6
GOLD 3 4	PHOS BRONZE	6 2238017-4
PRE-TIN 5	PHOS BRONZE	6 2238017-3
GOLD 3 4	BRASS	6 2238017-2
PRE-TIN 5	BRASS	2238017-1
FINISH	MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR. RUTH 10MAY2013	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK K RANDOLPH 09MAY13				
		APVD K RANDOLPH 09MAY13	NAME			
		PRODUCT SPEC 108-2112	SOCKET TERMINAL, VAL-U-LOK			
MATERIAL SEE TABLE		APPLICATION SPEC 114-13172	SIZE A2	CAGE CODE 00779	DRAWING NO C-2238017	RESTRICTED TO -
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.25 2 PLC ± 0.10 3 PLC ± - 4 PLC ± - ANGLES ± -		FINISH SEE TABLE	CUSTOMER DRAWING			
			SCALE 8:1	SHEET 1 OF 1	REV A1	