
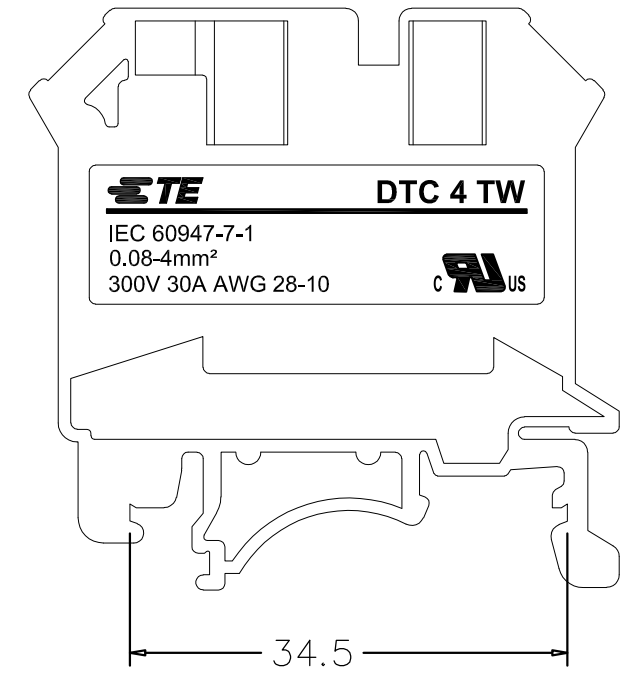
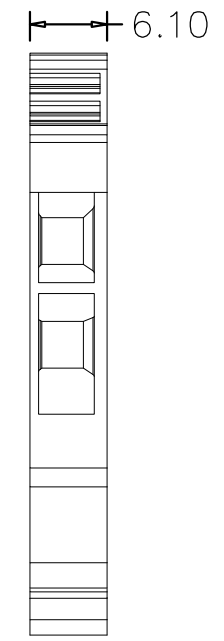
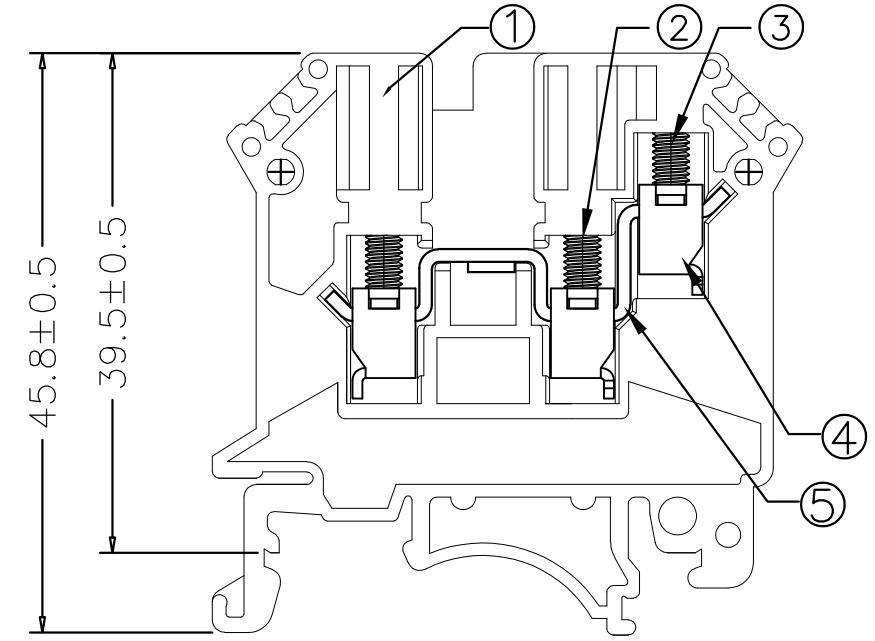


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A1	PER ECR-17-005987	10MAY2017	F.Y X.X

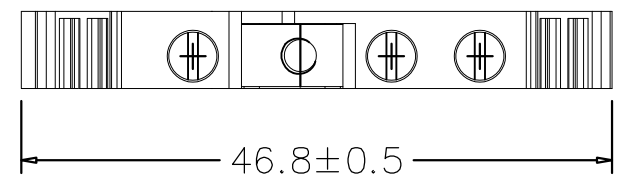

NOTES:

1. Material: See table
2. Rated current & voltage : (UL)30Amp 300V , (IEC)32Amp 500V
3. Impulse withstand voltage: 6KV
4. Screw Size & torque: M3, 5-6.2 lbs-in(0.56-0.7Nm)
5. Wire strip length: 8-10mm
6. Suitable wire size : (UL)28 - 10 AWG , (IEC)0.08-4mm²
7. Requirement for environmental substance must be compliance with ROHS and REACH.

ITEM	COMPONENTS	MATERIAL	Q'TY	PLATING
5	TERMINAL	COPPER	1	Tin Plated
4	CLAMP	STEEL	3	Zinc Plated
3	SCREW2	STEEL	1	Zinc Plated
2	SCREW1	STEEL	2	Zinc Plated
1	HOUSING	THERMOPLASTIC	1	

TE SERIES No.	PART NUMBER	COLOR
	2271681-5	BLACK
	2271681-4	ORANGE
	2271681-3	RED
	2271681-2	BLUE
	2271681-1	GRAY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN FENCER YU 10MAY2017	TE Connectivity	
DIMENSIONS: mm		CHK XIANG XU 10MAY2017		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD XIANG XU 10MAY2017	NAME	
0 PLC ± 0.50 1 PLC ± 0.40 2 PLC ± 0.30 3 PLC ± - 4 PLC ± - ANGLES ± 3°		PRODUCT SPEC 108-137172	4MM ² WIRE SECTION 1 IN 2 OUT SCREW TYPE TERMINAL BLOCK	
MATERIAL SEE TABLE		FINISH -	APPLICATION SPEC 114-137172	RESTRICTED TO -
		WEIGHT 9.58 g	SIZE A3	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO C-2271681	SCALE 1:1
			SHEET 1 OF 1	REV A1