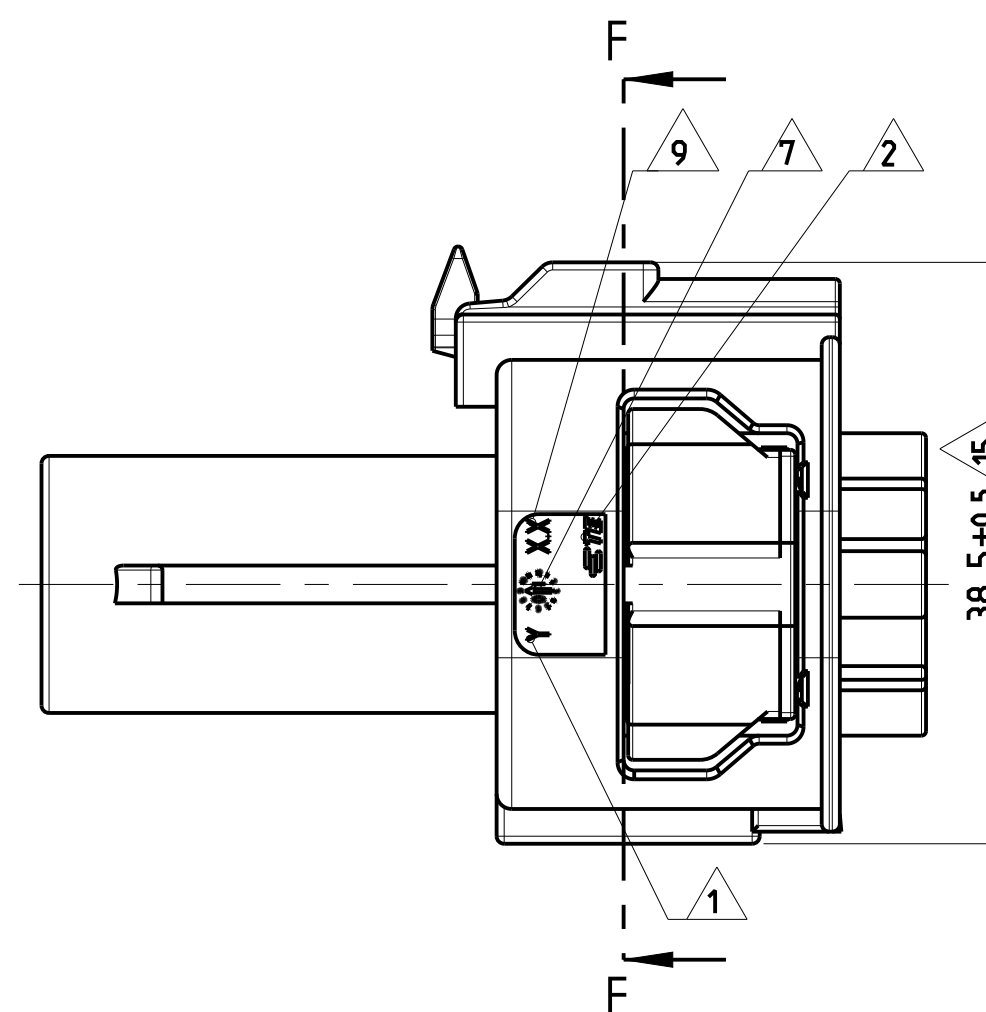
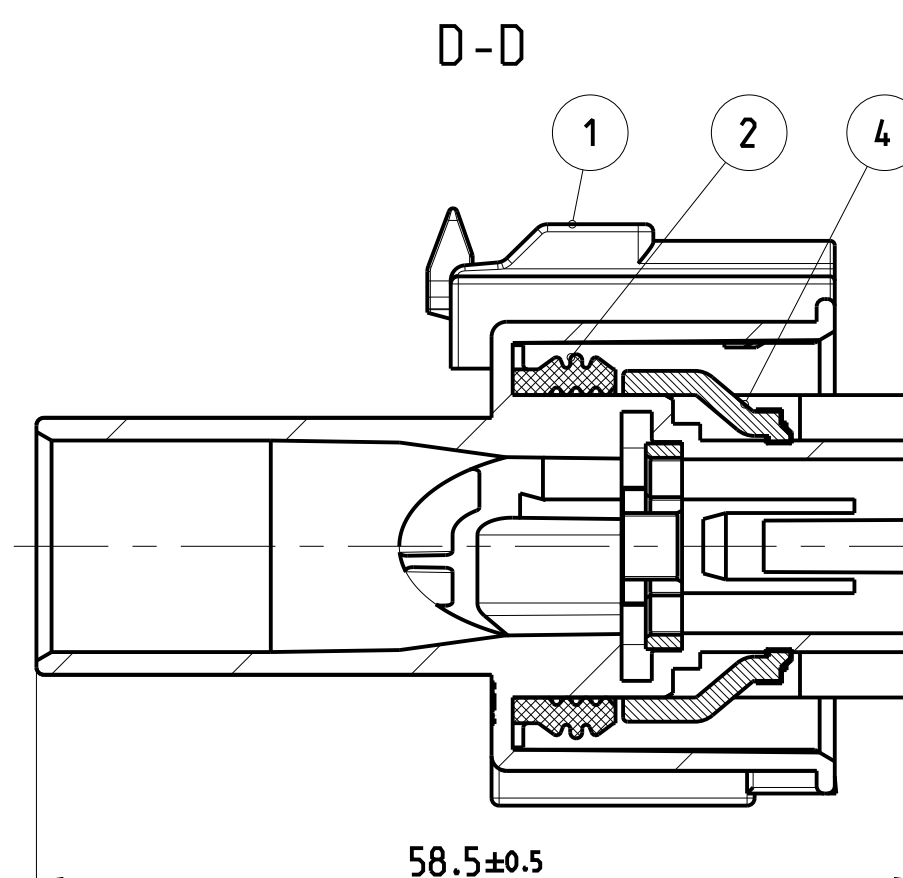
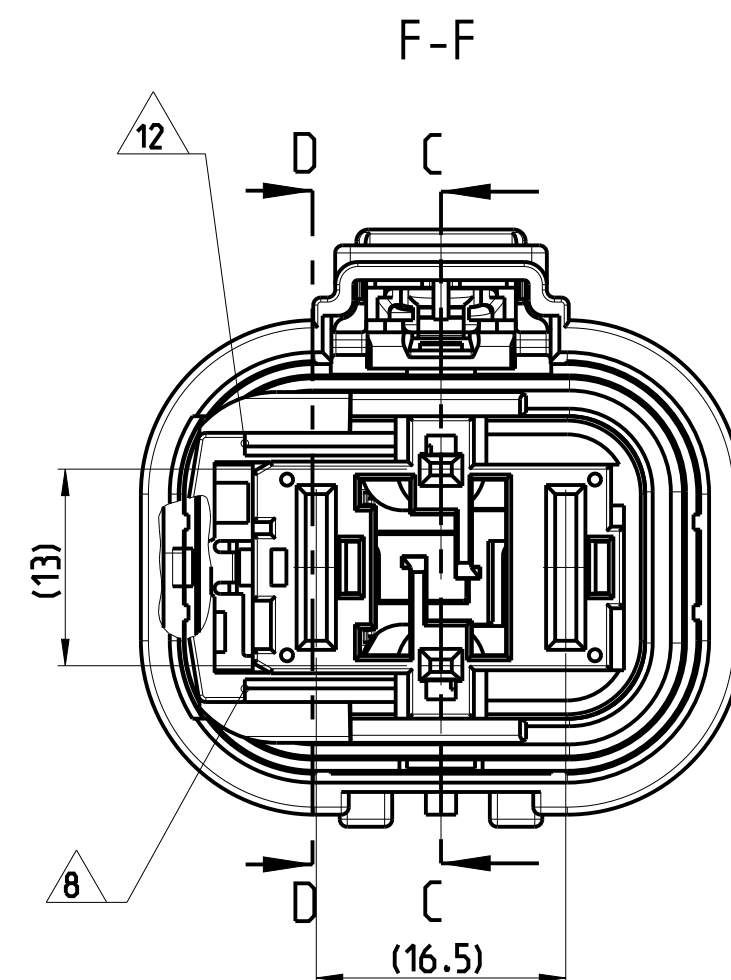
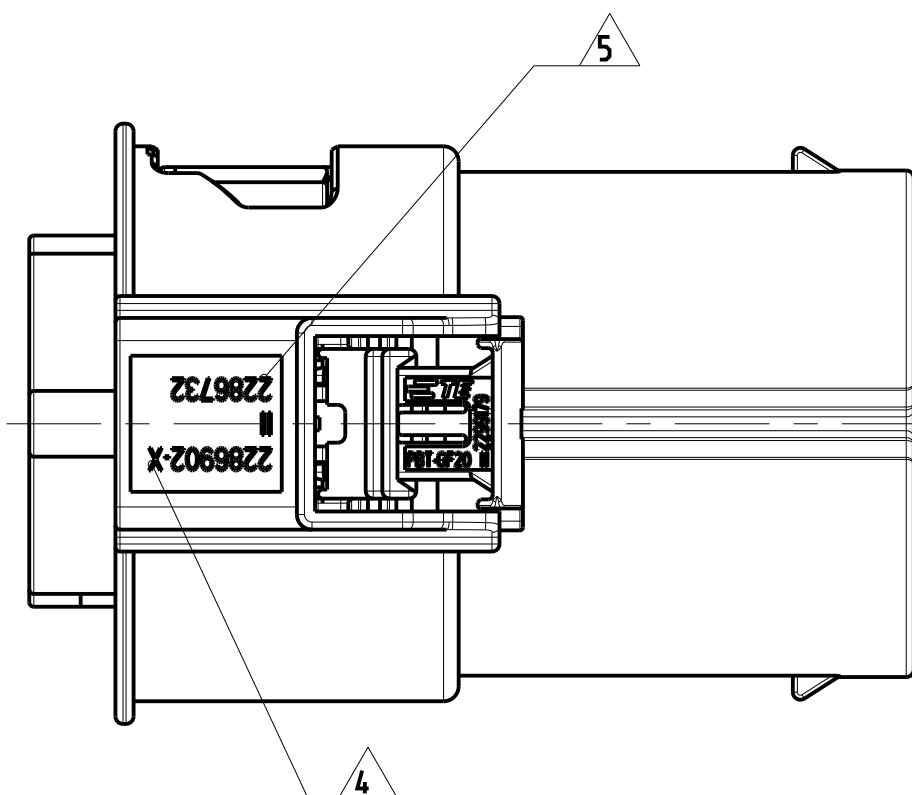
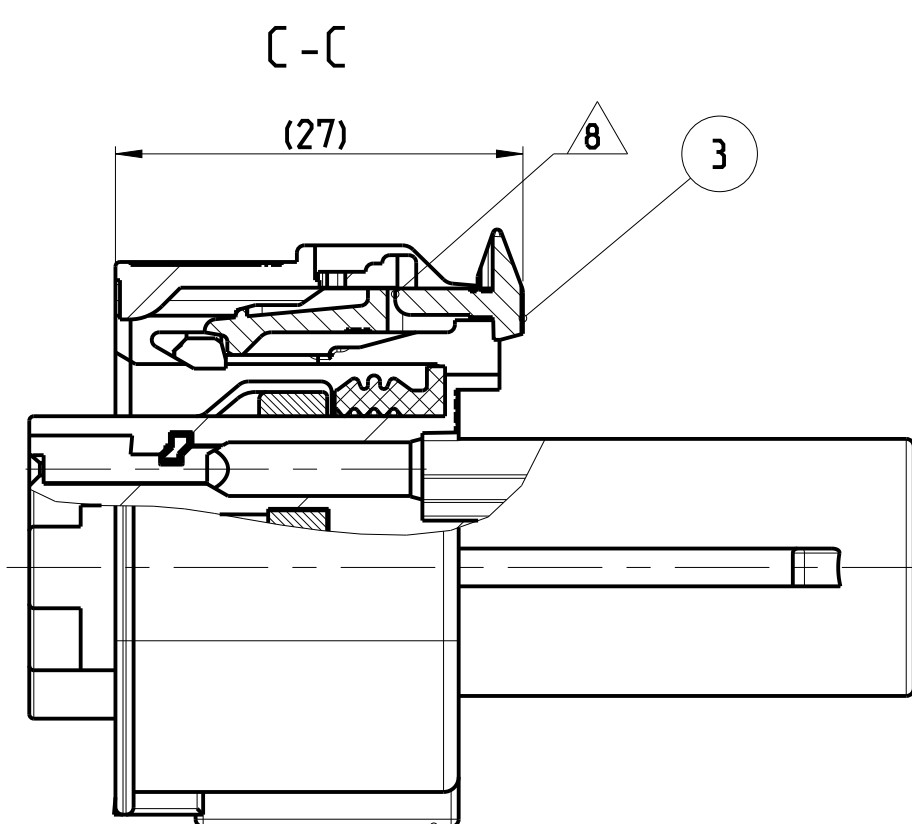
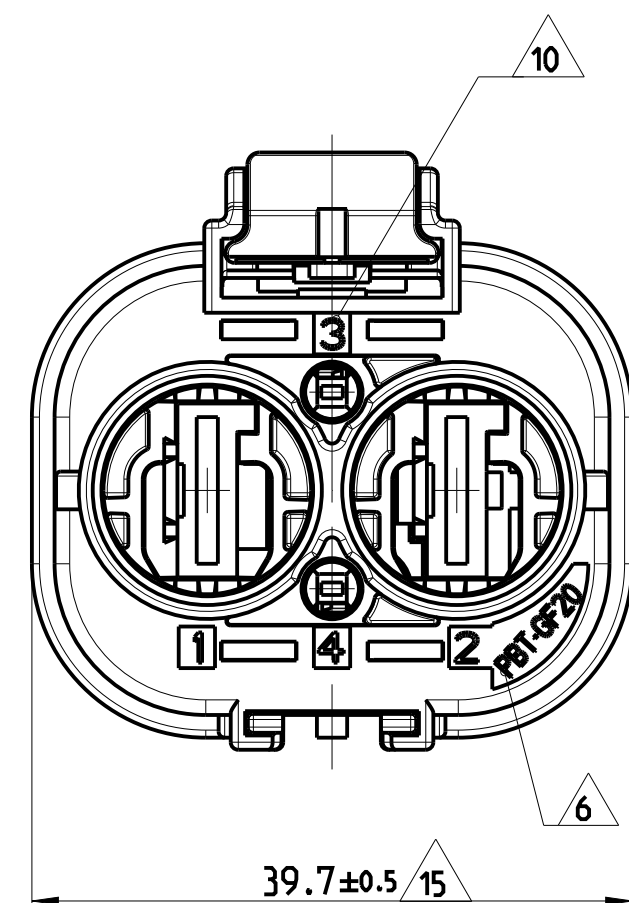




- ## NOTES

- | | |
|---|--|
|  | REVISION NUMBER SINGLE PART |
|  | TE-LOGO |
|  | --- |
|  | TE-NO.. SINGLE PART |
|  | ORDER NUMBER |
|  | MATERIAL MARKING |
|  | PRODUCTION DATE |
|  | DELIVERY POSITION |
|  | TOOL CAVITY NUMBERING |
|  | CONTACT CAVITY NUMBER |
|  | BULK PACKAGING IN CARDBOX |
| 12 | PRE LOCK POSITION OF TPA |
|  | 1MM CLIP SLOT (EWCAP-005-11) |
|  | --- |
|  | DEVIATIONS ARE ALLOWED IF CAUSED BY DRAFT OR WARPAGE |
|  | S3 ONLY WITH APPROPRIATE SWS |

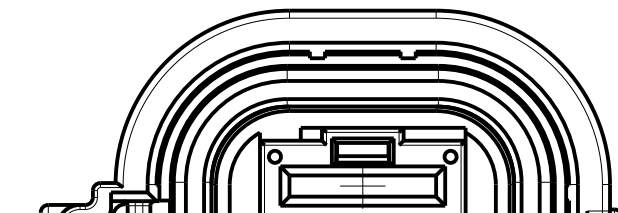
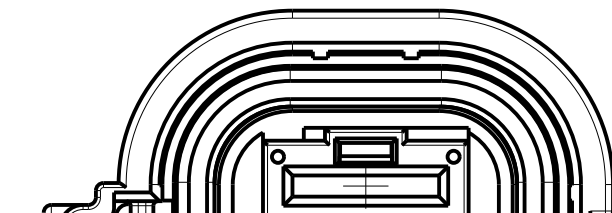
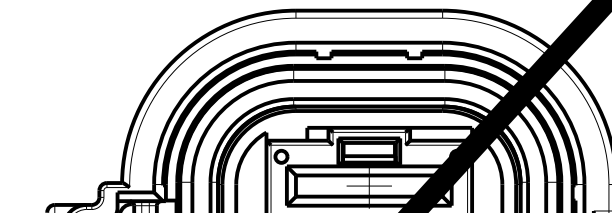
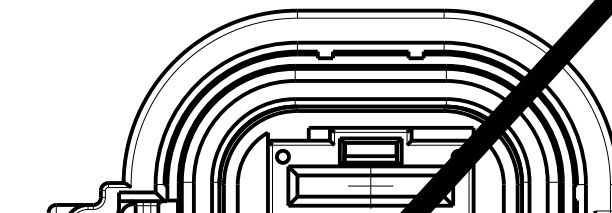
REVISIONS					
P	LTR	DESCRIPTION	DATE	OWN	APPROV
	A	INITIAL RELEASE	13JAN2021	RKL	DAO

CLASSIFICATION ACC. USCAR2 REV6	
MATING FORCE CLASS	M3
SEALING CLASS 	S2 / S3
VIBRATION CLASS	V1
TEMPERATURE CLASS	T3

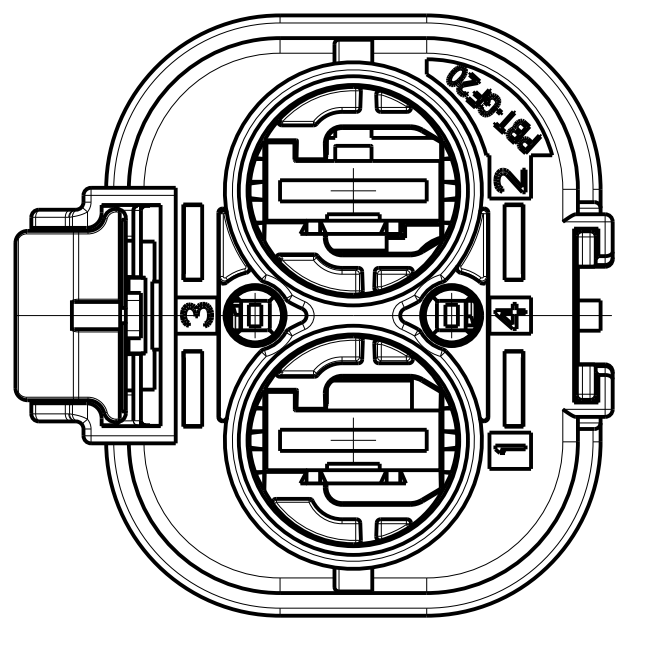
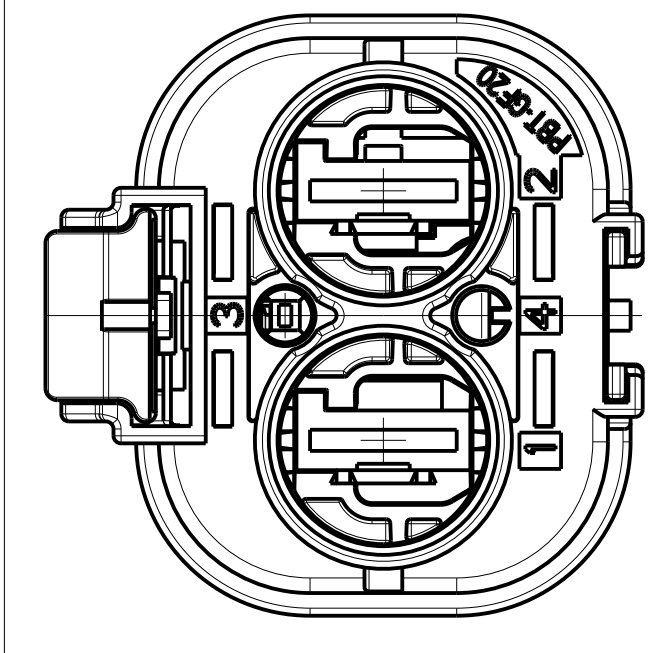
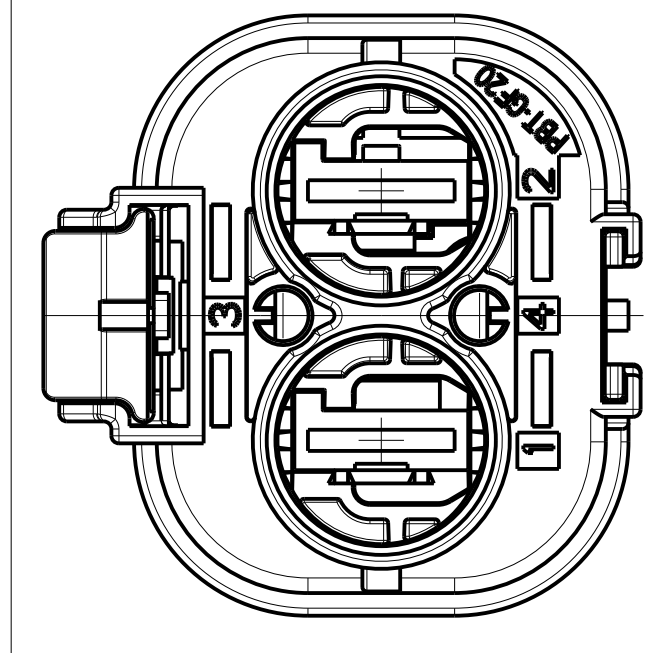
1563846	16	0-2287390-3	1-2287390-3
1563845	8-10	0-2287390-5	1-2287390-5
1563844	4-6	0-2287390-4	1-2287390-4
TE PN TERMINAL	WIRE RANGE (MM ²)	SEALING CLASS	
		S2	S3
		TE-PN SINGLE WIRE SEAL	
RECOMMENDED TERMINAL SYSTEM: SOCKET CONTACT 9.5			

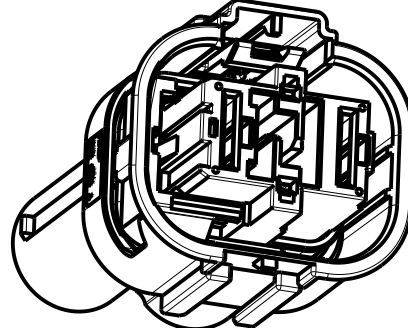
1452671	1.0	0-967067-1	
1452668	0.5 - 0.75		
1452665	0.35	0-967067-2	
TE PN TERMINAL	WIRE RANGE (MM ²)	SEALING CLASS	
		S2	S3
		TE-PN SINGLE WIRE SEAL	
RECOMMENDED TERMINAL SYSTEM: SOCKET CONTACT 1.2			

OVERVIEW CODINGS

CODING A	CODING B	CODING C	CODING D
			

OVERVIEW CAVITY- VERSIONS

VERSION 1 -	VERSION 2 4 CLOSED	VERSION 3 3 AND 4 CLOSED	
			

1	1	1	1	1	1	<div><div>RED</div><div>PBT-GF20</div><div>RETAINER</div><div>4</div></div> <div><div>RED</div><div>PBT-GF20</div><div>CPA</div><div>3</div></div> <div><div>ORANGE</div><div>SILICON</div><div>SEAL</div><div>2</div></div> <div><div>Grey</div><div rowspan="2">PBT-GF20</div><div rowspan="2">SOCKET HSG. 4POS. MCON 1.2; MCON 9.5</div><div>1</div></div> <div><div>BLACK</div><div></div><div></div><div></div></div> <div><div>COLOUR</div><div>MATERIAL</div><div>DESCRIPTION</div><div>ITEM NO</div></div>	
1	1	1	1	1	1		
1	1	1	1	1	1		
1	1	1	-	-	-		
-	-	-	1	1	1		
QTY.							
-	4 CLOSED	3 AND 4 CLOSED	-	4 CLOSED	3 AND 4 CLOSED	CAVITY VERSION	1:1 
B	B	B	A	A	A	CODING	
3-2286732-9	4-2286732-9	5-2286732-9	3-2286732-8	4-2286732-8	5-2286732-8	TE ASSY-NO.	
3-2286733-9	4-2286733-9	5-2286733-9	3-2286733-8	4-2286733-8	5-2286733-8	SUITABLE FOR TE TAB- HOUSING	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE 28MAR2020 BY R.K.LEME CHK D.A.OLIVEIRA APPROVED D.A.OLIVEIRA 28MAR2020		 TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ± 0.5 1 PLC ± 0.5 2 PLC ± 0.5 3 PLC ± 0.5 4 PLC ± 0.5 ANGLES $\pm 1^\circ$		SOCKET HSG. 4POS. ASSEMBLY MCON 1.2; MCON 9.5	
		PRODUCT SPEC 108-37122 APPLICATION SPEC 114-37033		SIZE CAGE CODE DRAWING NO A - C-2286732	
MATERIAL		WEIGHT		RESTRICTED	
-		-		-	
FINISH		CUSTOMER DRAWING		SCALE 2:1 SHEET 1 OF 1 REV A	