



CONTACTS FOR FLR-CABLE


USABLE WITH TAB 0.8mm AND TAB 0.6mm THICKNESS

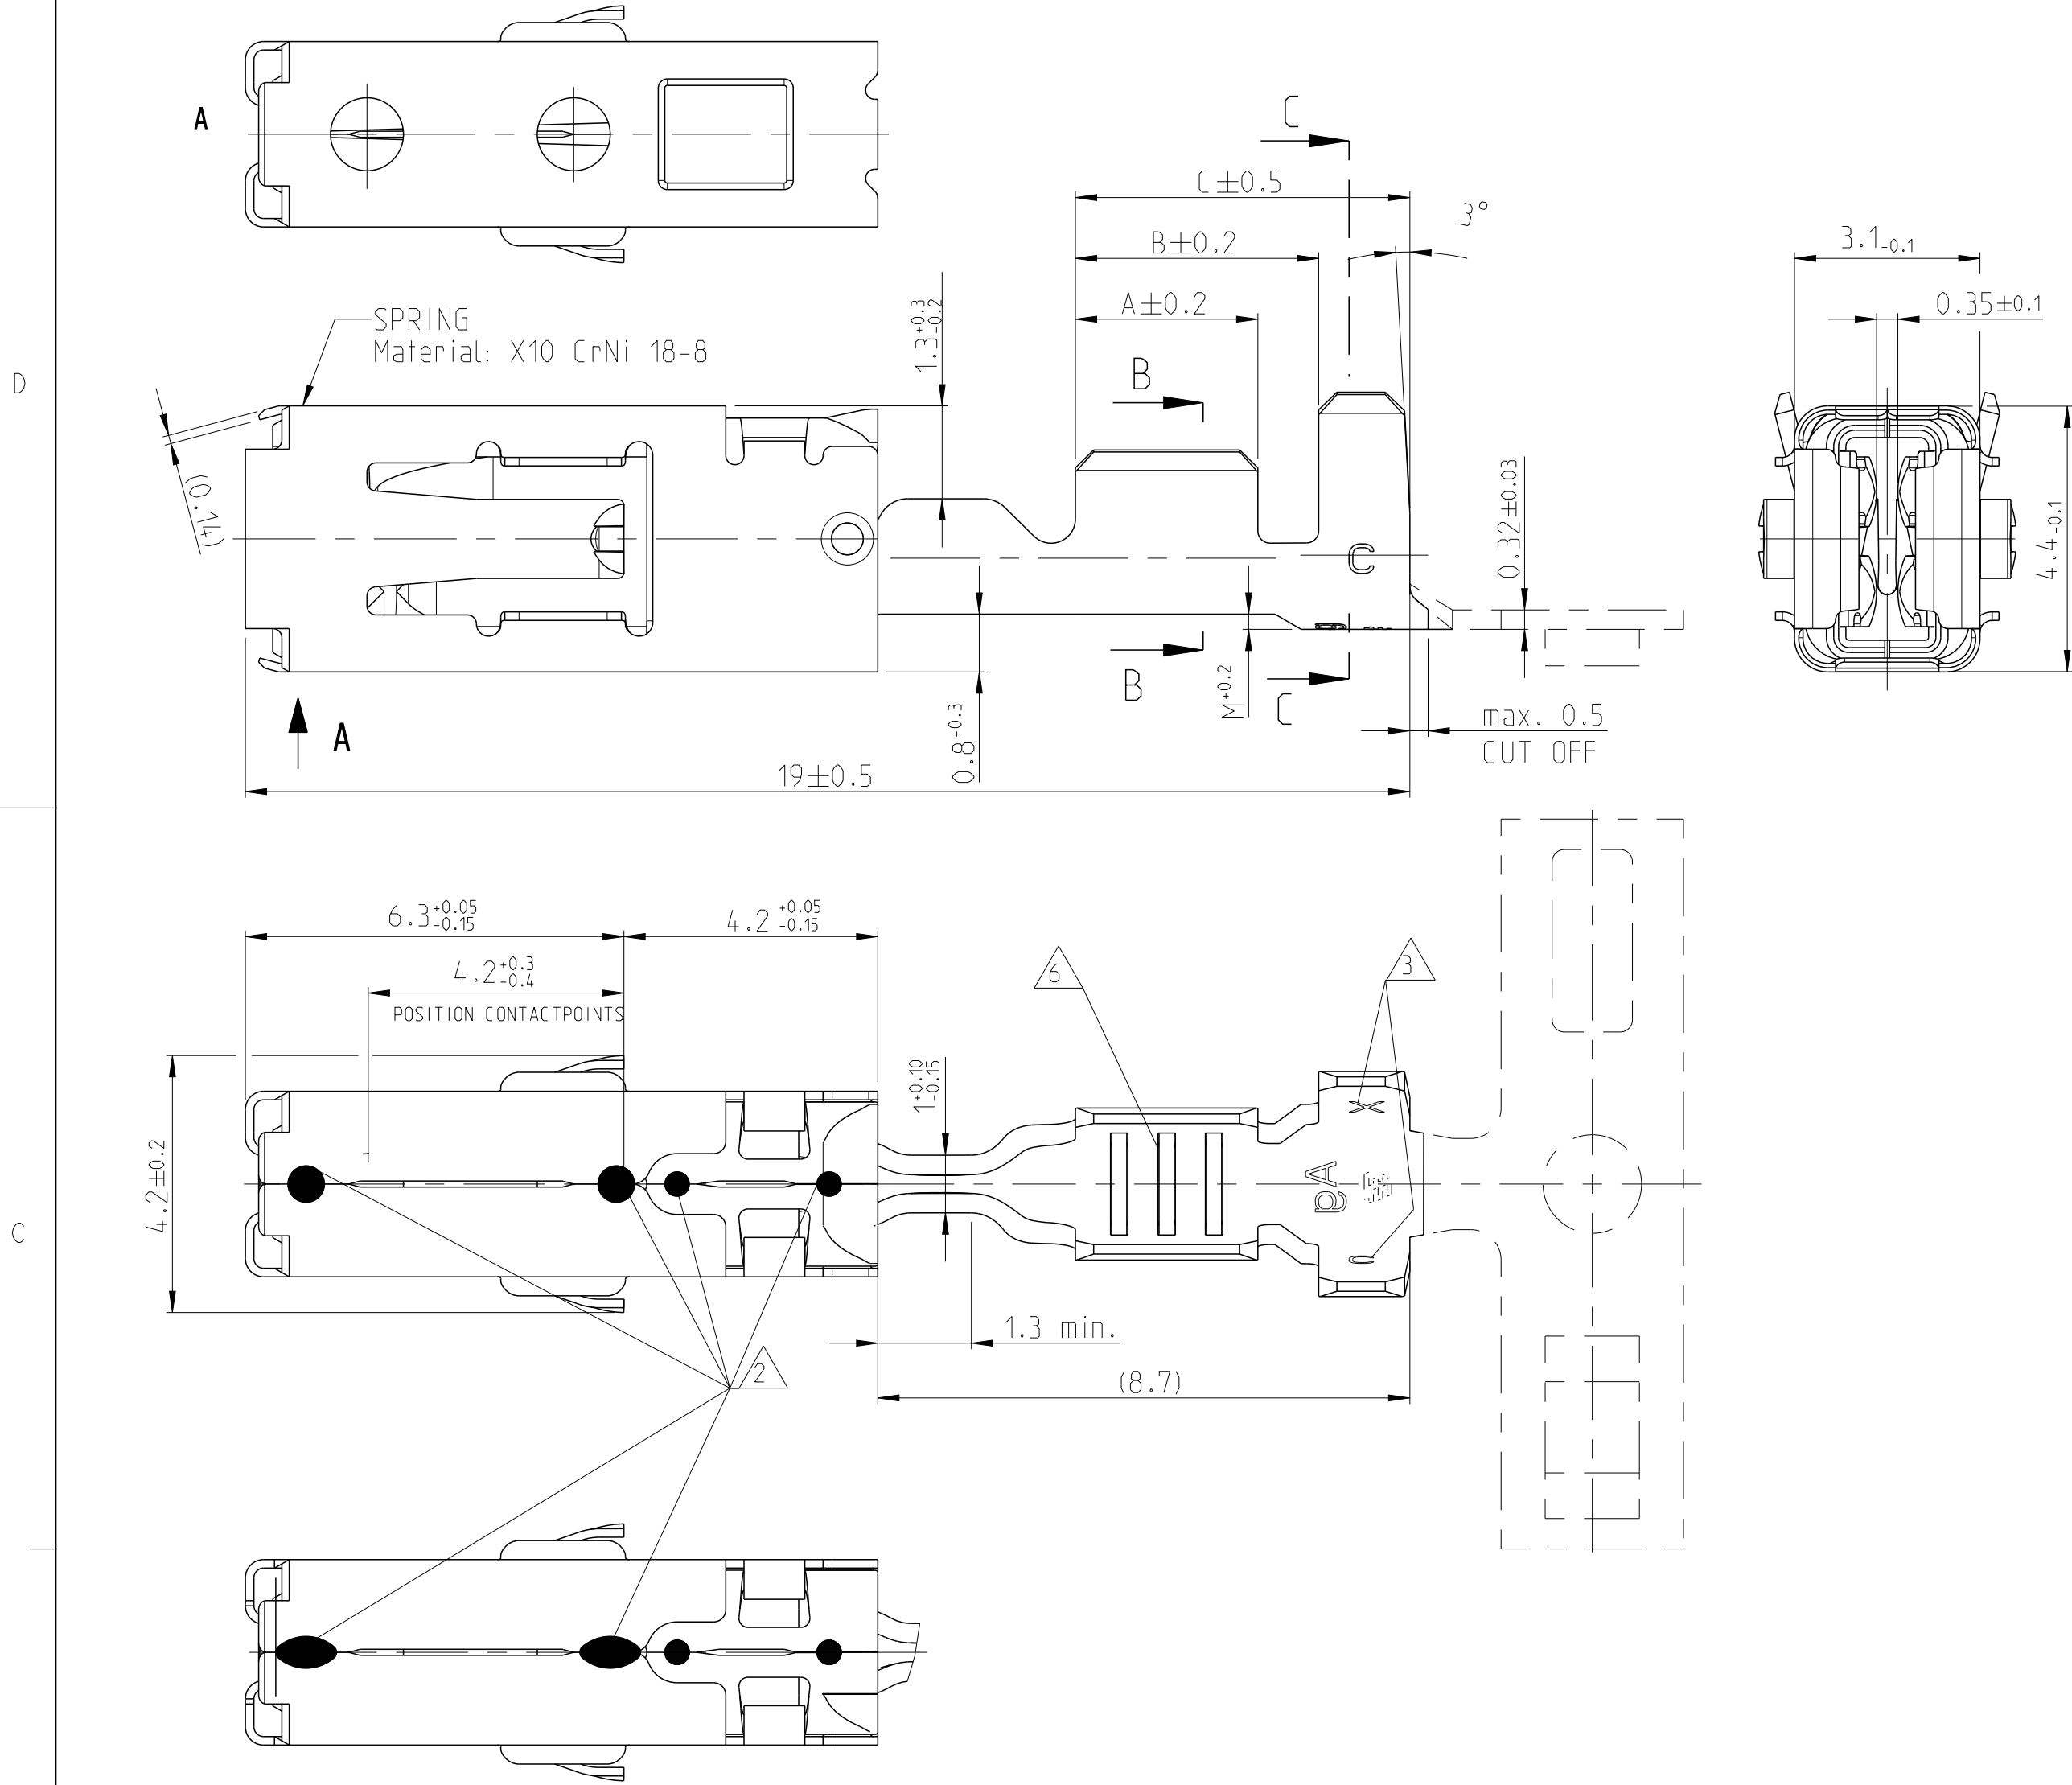

TYPE A

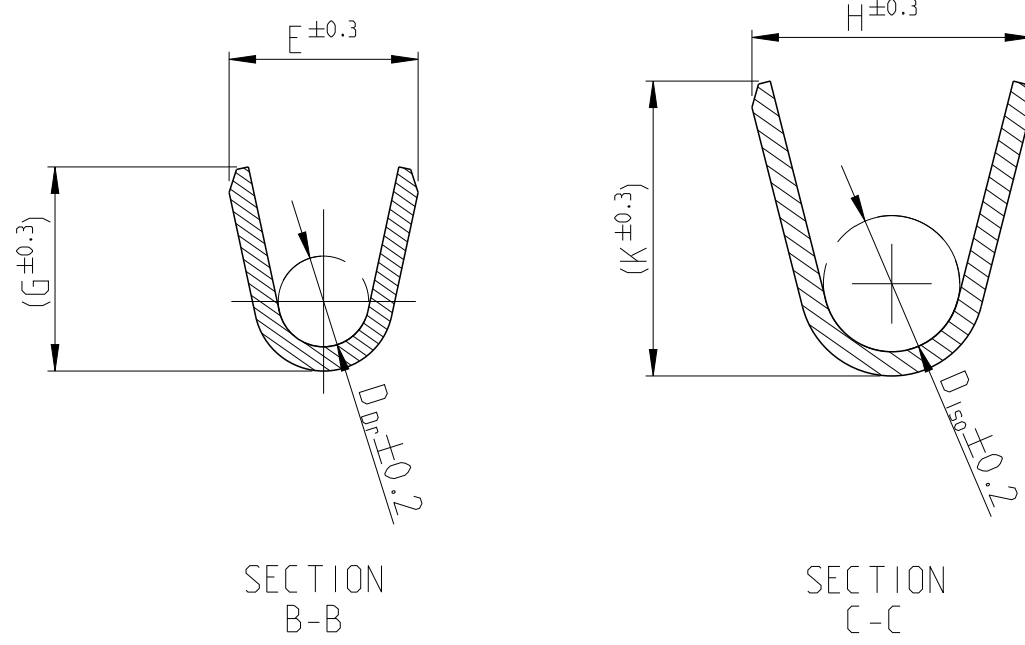


TYPE B2

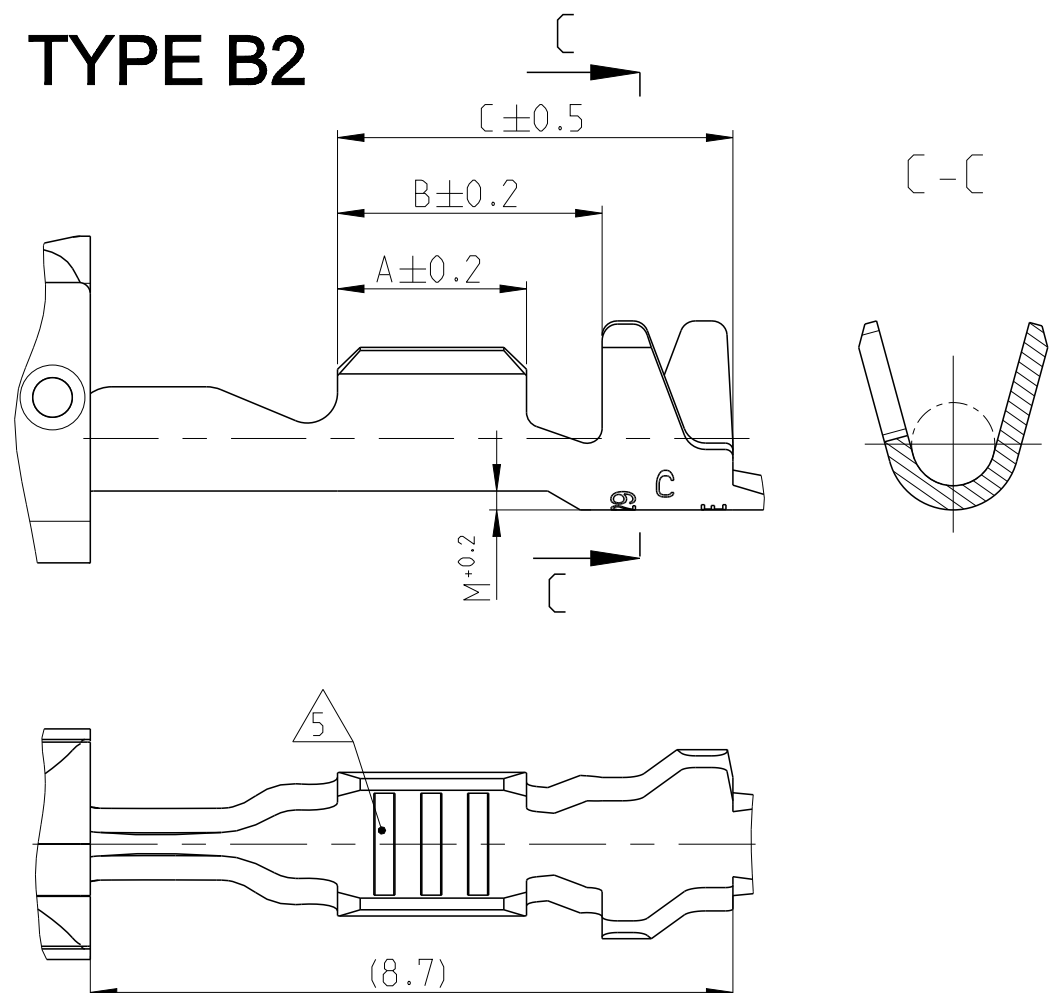


CONTACTS FOR SINGLE WIRE SEALING SYSTEM:
FLR- AND FLK- CABLE

DIMENSIONS SEE FIGURE "CONTACTS FOR FLR-CABLE"

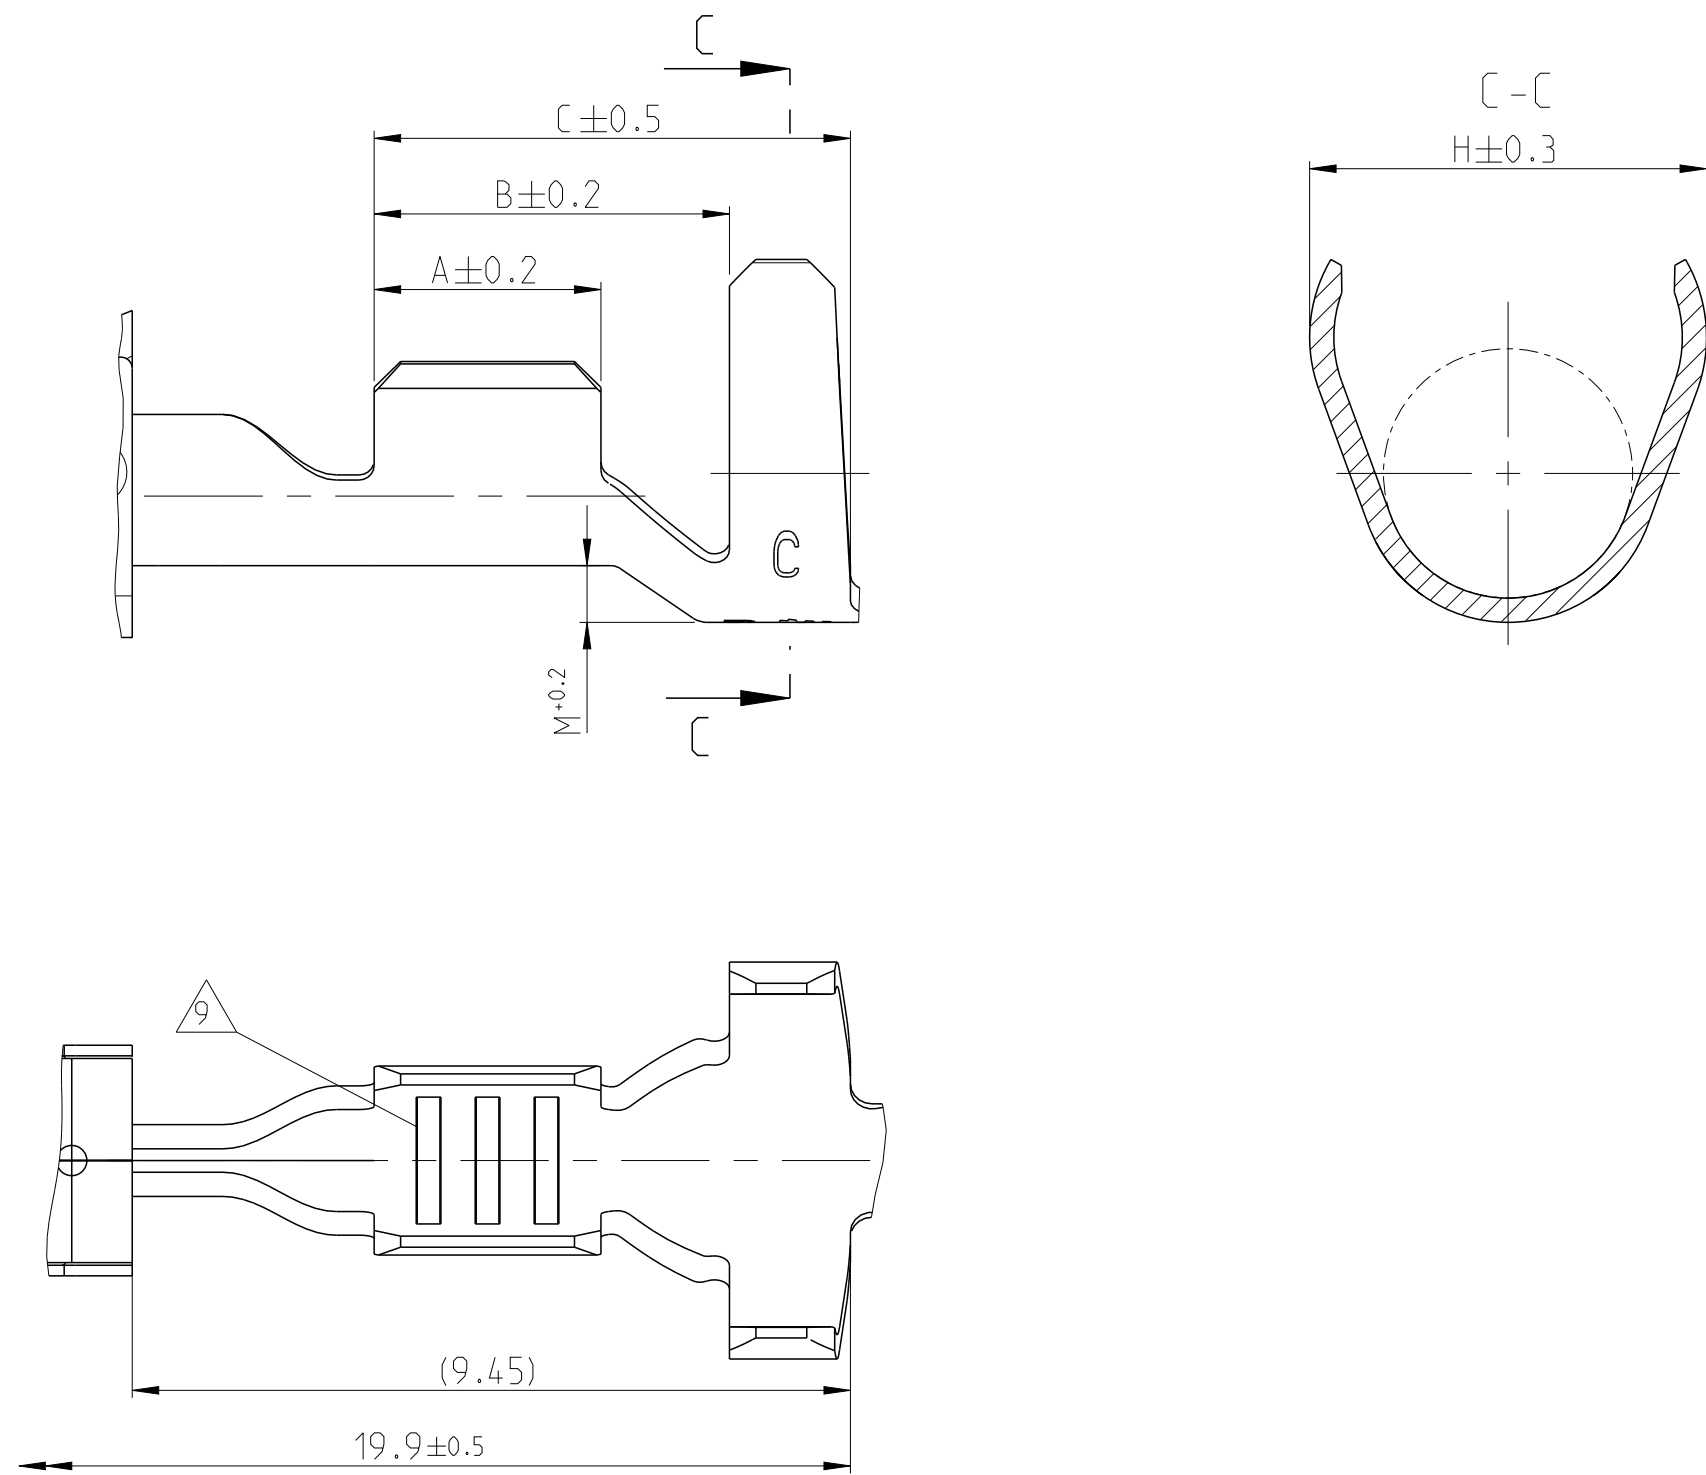


SINGLE WIRE SEALING SYSTEM

SINGLE WIRE SEAL Einzeldichtung		
963292-1	2.7...3.0	YELLOW
963293-1	2.0...2.7	REDBROWN
963294-1	1.2...2.1	BLUE
ORDER NO.	INSULATION DIA	COLOUR

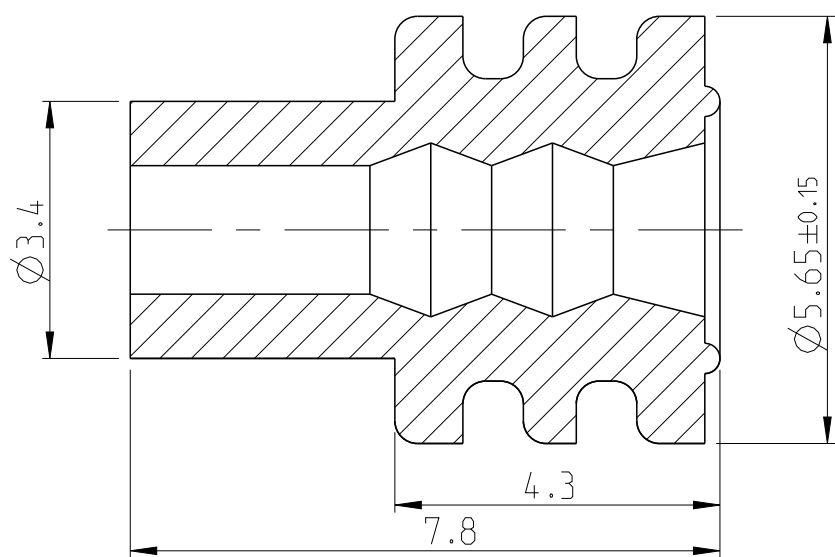

Notes:

- 1 TO BE USED ON TAB 2.8+0.3/-0.1 X 0.6+0.07/-0.03
- 2 ALTERNATIVELY LASERWELDED POINT OR LINE SHAPED(DIE CAUSED)
- 3 DIE-IDENTIFICATION AND REVSION STATUS
- 4 FOR DOUBLE AND SINGLE CRIMP
- 5 SINGLE WIRE SEAL TO BE SELECTED ACCORDING TO INSULATION-DIA
- 6 DIFFERENT FORM OF THE SERRATION POSSIBLE
- 7 DETAILS OF DESIGN ARE LEFT TO MANUFACTURER



2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.DU 11NOV2022	TE Connectivity	
DIMENSIONS:		CHK J.GU 11NOV2022		
mm		APVD W.ZHANG 11NOV2022	NAME	
		PRODUCT SPEC	PRODUCT GROUP DRAWING FOR AMP MCP 2.8K	
		108-18717		
MATERIAL		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO	
		116-18387		
FINISH		WEIGHT	RESTRICTED TO	
-		-	A 00779 C=2437289	
		Customer Drawing	SCALE 10:1 SHEET 1 OF 1 REV A	