

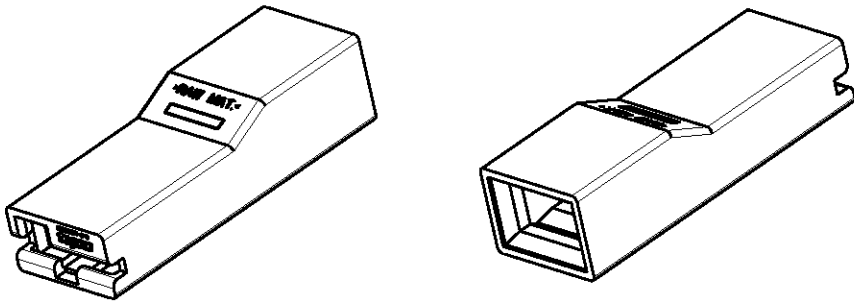


LOC 	DIST -	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			W4	REVISED PER ECR-25-237820	17JUL25	AG	DL

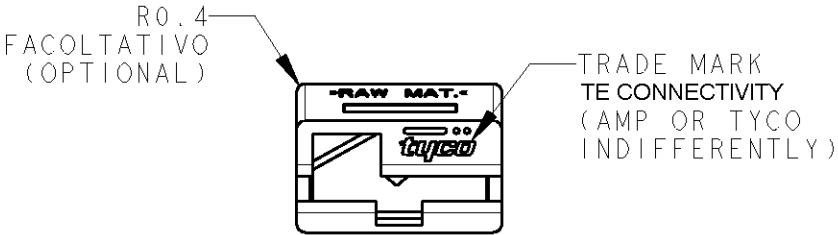

SCALE 2:1

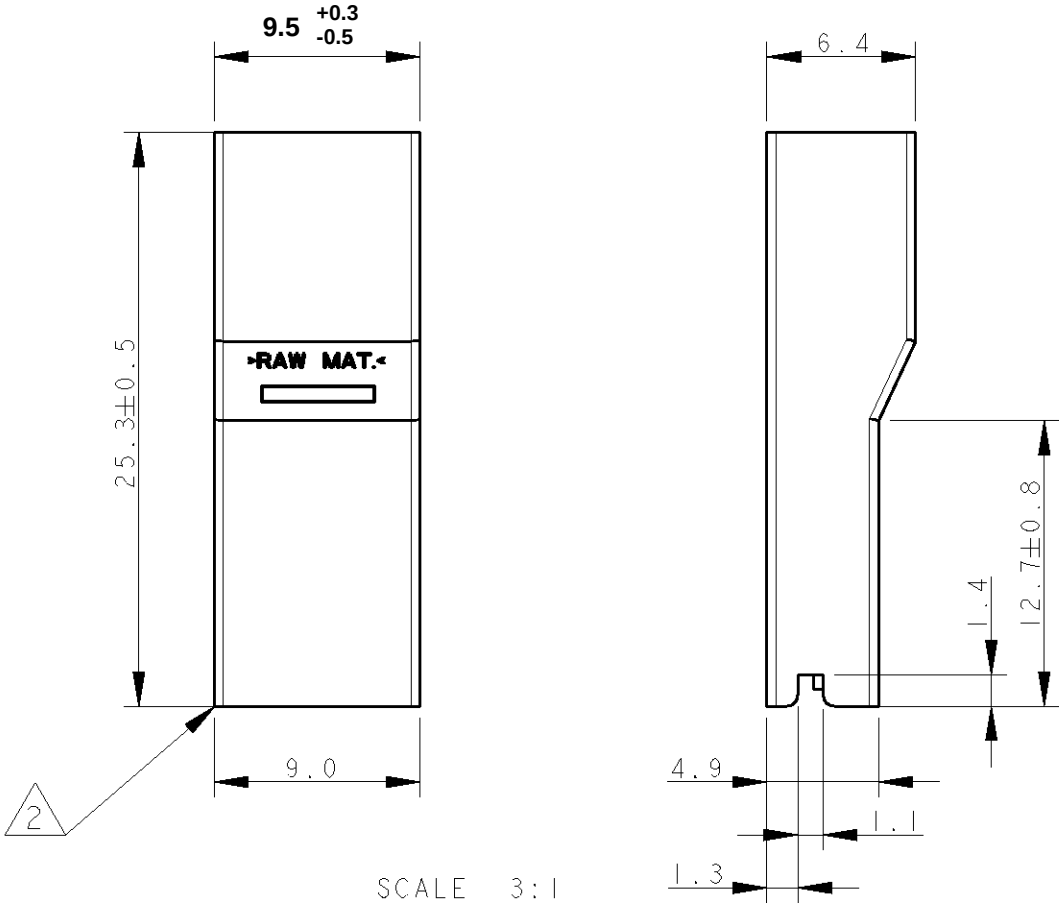

- 1
- BLOCCETTO ADATTO PER TERMINALI FEMMINA PER LA SERIE 6.3 mm FASTON CON RANGO FILO DA 0.8-2.5 MM2. (SUITABLE FOR RECEPTACLE TERMINALS WITH WIRE RANGE 0.8-2.5 mm2).
- 2
- BAVA ACCETTABILE: 0.3 MAX (FLASH PERMISSIBLE: 0.3 MAX.)
- 3
- SPECIFICA DI PRODOTTO: 108-20035 (PRODUCT SPEC.: 108-20035)
- 4
- NON ANCORA RILASCIATO IN PRODUZIONE (NOT YET RELEASED FOR PRODUCTION)

1,2,3	NATURALE (NATURAL)	PA 6 UNFILLED, UL 94-V2 IEC 60335-1, GW 750°C NO FLAME	280232-8	W
1,2,3	NATURALE (NATURAL)	PA 6.6 UL 94-V0 (PA 6.6 UL 94-V0 UNFILLED)	280232-6	U
1,2,3	NERO (BLACK)	PA 6.6 (PA 6.6 UNFILLED)	280232-5	U
1,2,3	ROSSO (RED)		280232-1	U
1,2,3	NATURALE (NATURAL)		280232	U
NOTE	COLORE (COLOUR)	MATERIALE (MATERIAL)	PART NUMBER	REV

		DWN H. YAALI 29OCT2004	 TE Connectivity				
		CHK G. TURCO					
DIMENSIONS: mm		APVD -	NAME				
		PRODUCT SPEC SEE NOTE 3	POST INSULATION FOR FASTON 6.3 mm series RECEPTACLE CONTACT				
		APPLICATION SPEC -					
MATERIAL SEE TABLE		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-280232	RESTRICTED TO -	
		CUSTOMER DRAWING			SCALE 3:1	SHEET 1 OF 1	REV W4
		TOLERANCES UNLESS OTHERWISE SPECIFIED:					
		0 PLC ±- 1 PLC ±0.3 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±2°					
		FINISH -					