

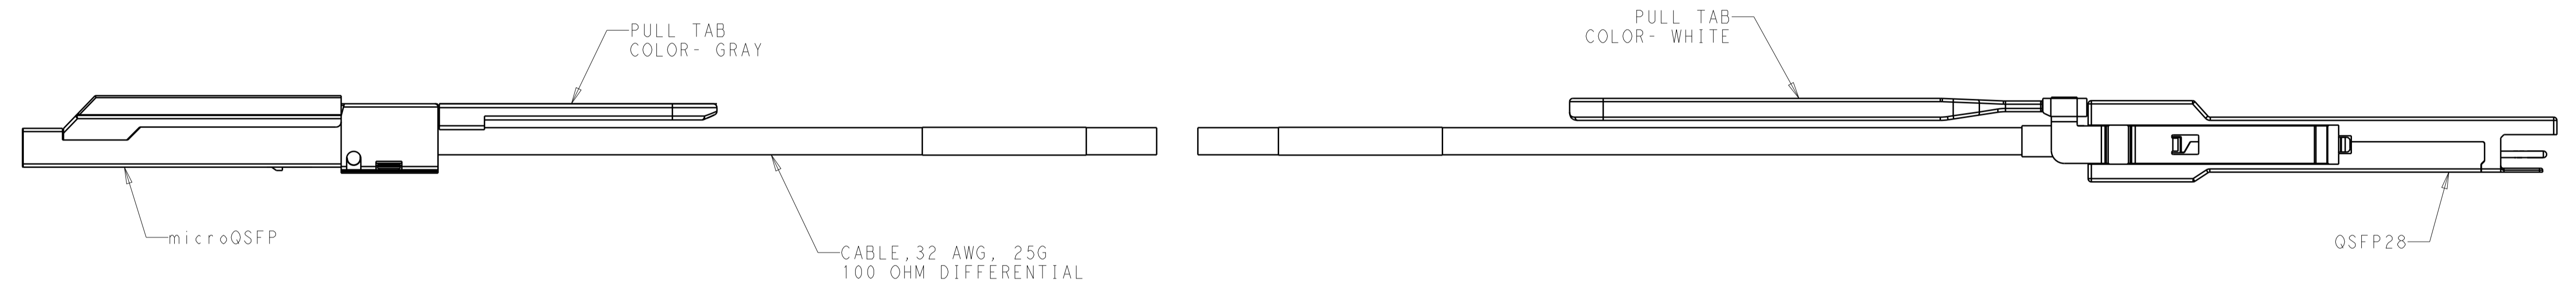


REVISIONS				
P.	LTN	DESCRIPTION	DATE	APVD
1		PRELIMINARY	21JUL2016	TS GF
2		REV LABEL FORMAT	31AUG2016	TS GF
3		CHANGE FROM 33 TO 32 AWG	28NOV2016	TS GF

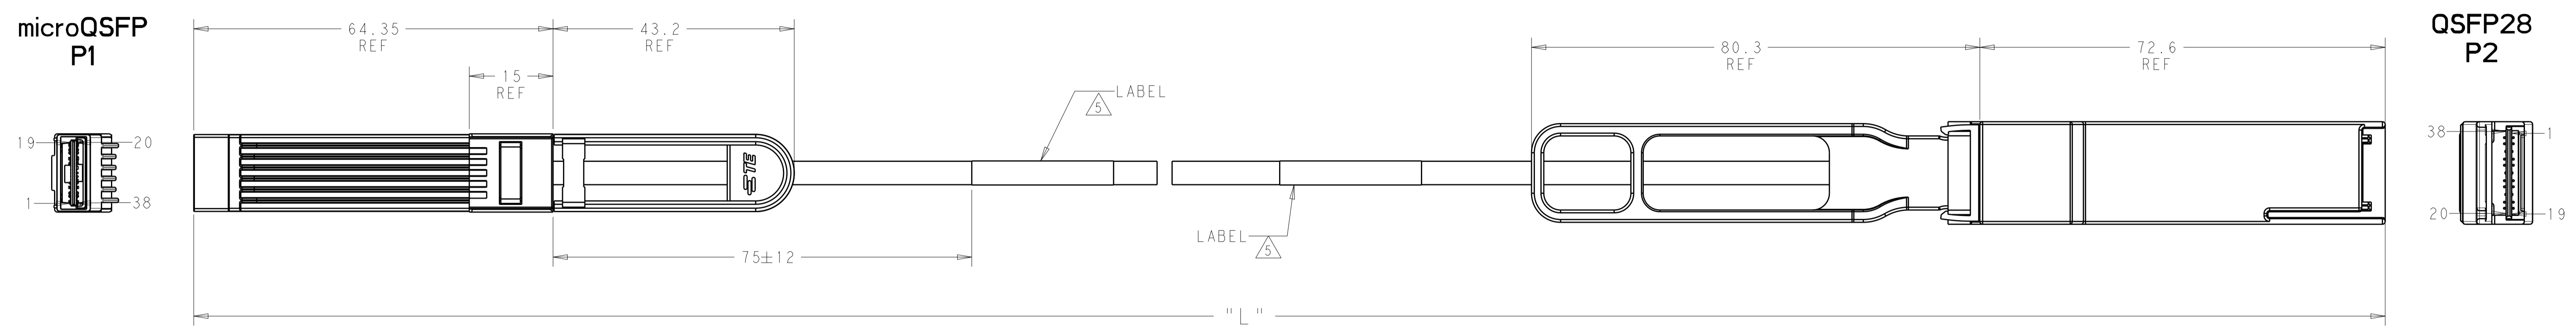

- CHARACTERISTIC IMPEDANCE: 100±10 OHMS (MEASURED DIFFERENTIALLY)
 - CABLE ASSEMBLY TESTED FOR OPENS, SHORTS AND PROPER EEPROM PROGRAM.
 - PRODUCT AND PROCESSING MEETS THE REQUIREMENTS OF TE STANDARD TEC-138-702.
 - SEE SHEET 2 FOR WIRING SCHEMATIC.
- △ LABEL INFORMATION: -1 SHOWN

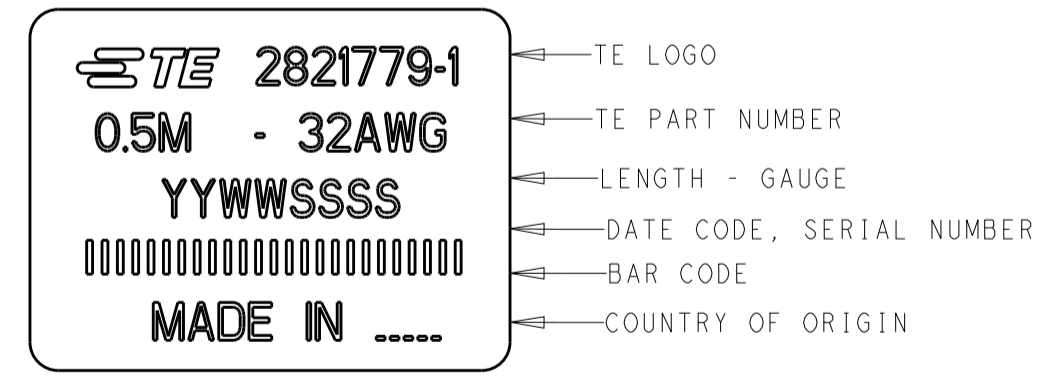

△ DUE TO SHORT CABLE LENGTH, THE PART NUMBERS INDICATED MAY NOT MEET IEEE802.3bJ RETURN LOSS AND MINIMUM INSERTION LOSS LIMITS.

2000±40	32 AWG	2821779-3
1000±40	32 AWG	2821779-2
500±25	32 AWG	2821779-1 △6
L	WIRE GAGE	PART NO

THIS PRODUCT HAS NOT COMPLETED VALIDATION AND QUALIFICATION TESTING

PRELIMINARY NOT RELEASED FOR PRODUCTION


DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		MATERIAL:		FINISH:	
mm	0 PLC	±					
	1 PLC	±					
	2 PLC	±					
	3 PLC	±					
	4 PLC	±					
	ANGLES	±					

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN	T. SMITH	21JUL2016
		CHK	G. FRANKLIN	21JUL2016
		APVD	G. FRANKLIN	21JUL2016
		NAME	CABLE ASSEMBLY microQSFP TO QSFP28 32 AWG	
		PRODUCT SPEC		
		APPLICATION SPEC		
		SIZE	A1	CAGE CODE
		WEIGHT	-	DRAWING NO
		CUSTOMER DRAWING	SCALE	7:4
			SHEET	1 OF 2
			REV	3

REVISIONS				
P.	LTN	DESCRIPTION	DATE	APVD
		SEE SHEET 1		

**microQSFP
P1**

**QSFP28
P2**

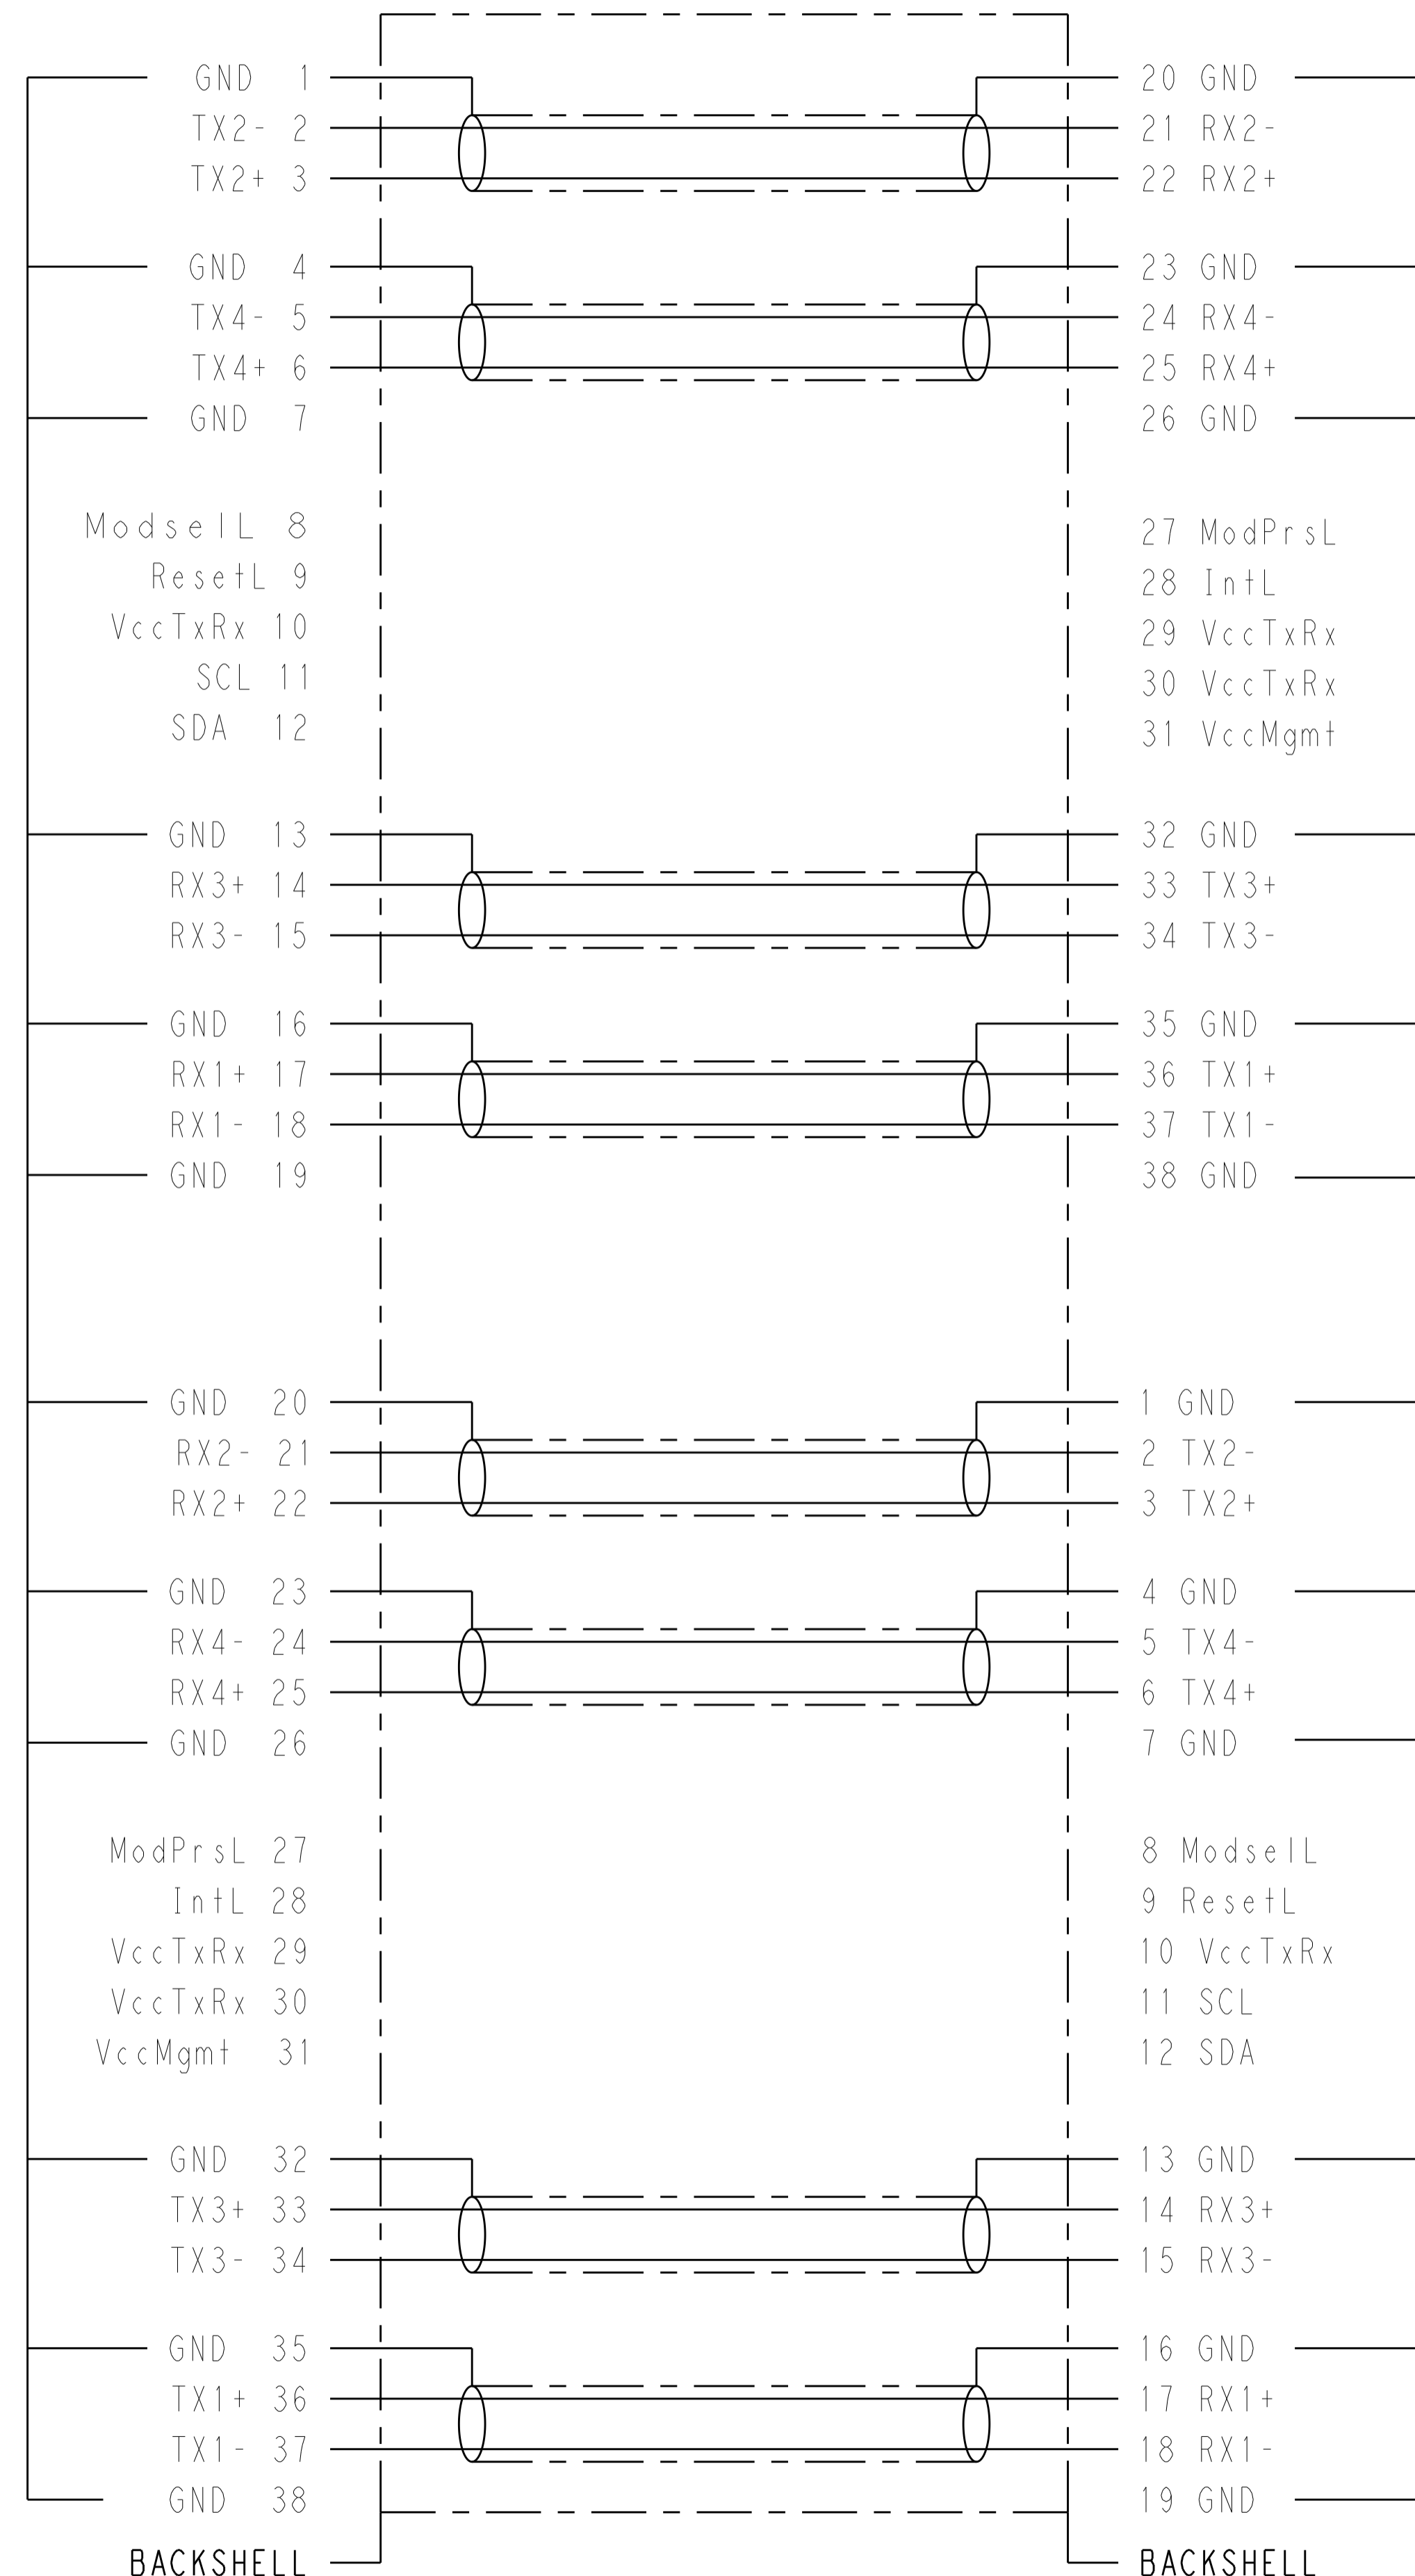

BACKSHELL

BACKSHELL

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN T. SMITH 21JUL2016	TE Connectivity
DIMENSIONS:		CHK G. FRANKLIN 21JUL2016	
mm		APVD G. FRANKLIN 21JUL2016	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING	NAME CABLE ASSEMBLY microQSFP TO QSFP28 32 AWG SIZE A1 SCALE 1:2
MATERIAL		FINISH	DRAWING NO. C=2821779 SHEET 2 OF 2 REV 3