


LOC	DIST	REVISIONS				
IR	-	P	LTR	DESCRIPTION	DATE	APVD
		1		PRELIMINARY RELEASE	27JAN2015	PK TD
		2		BARREL DIMENSIONS UPDATED	16FEB2015	PK TD
		A		INITIAL RELEASE	1APR2015	PK TD
		A1		REVISED PER ECR-20-101110	09FEB2021	MK EW

NOTES:

1. CONTINUOUS STRIP ON REELS
2. WIRE RANGE: 20-16 AWG [0.5-1.50 SQ.mm]
3. INSULATION RANGE: $\varnothing 2.2-2.90$
4. FEED [PITCH] : 18.0

5 AMP LOGO

6 PART OBSOLETE

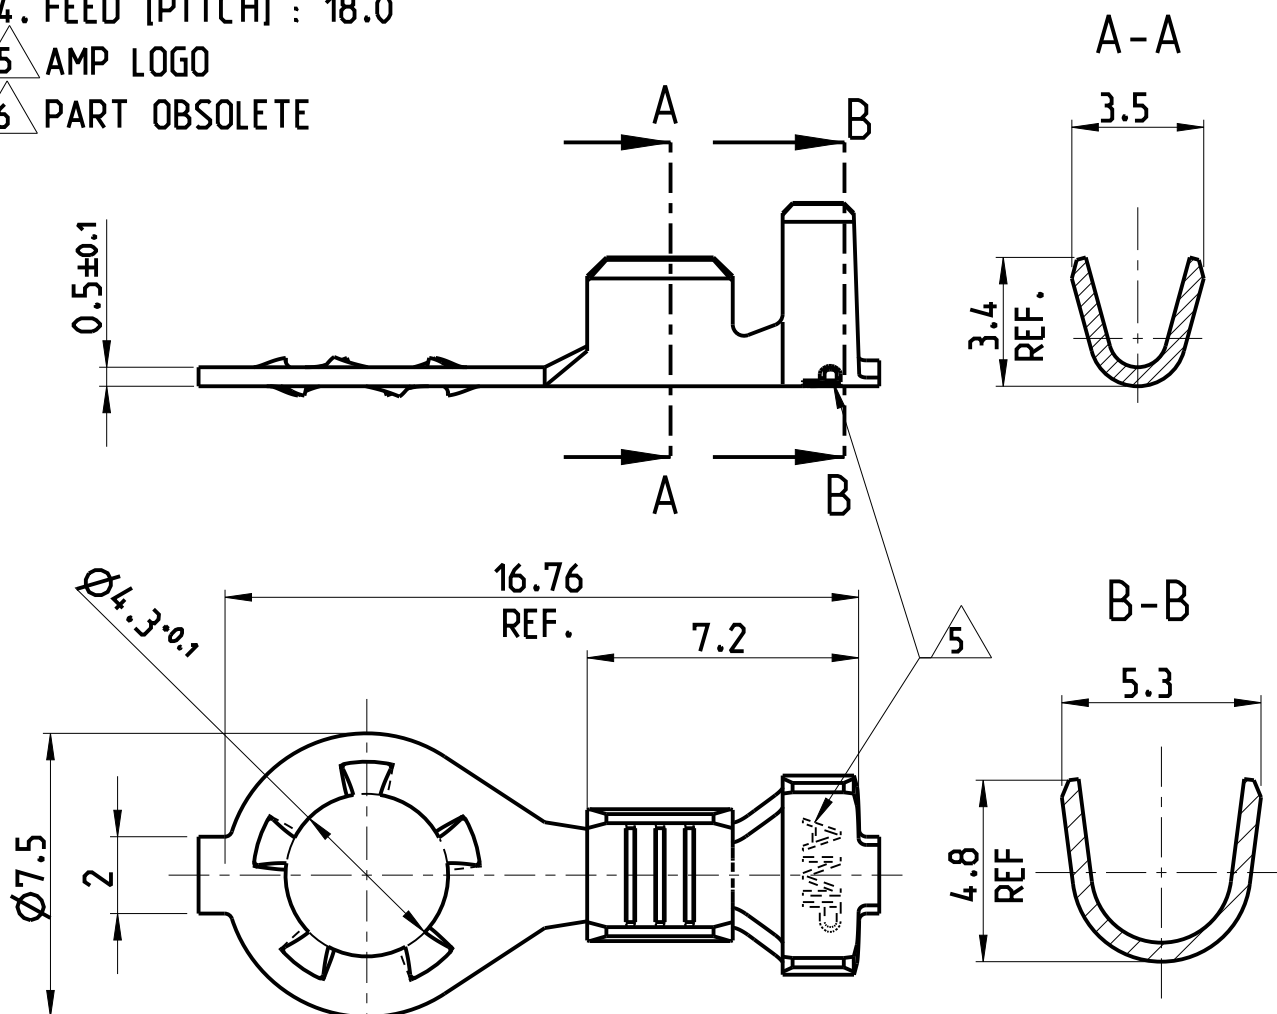

	6	PRE-TIN, 1-3 μm	BRASS	2825152-3
PRELIMINARY			BRASS	2825152-2
PRELIMINARY		NONE	BRASS	2825152-1
REMARKS		FINISH	MATERIAL	PART NO

2011

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2011

DIMENSIONS:		DWN	27JAN2015	MATERIAL	SEE TABLE	FINISH	SEE TABLE
mm		PRASANTH					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	27JAN2015				
		APVD	27JAN2015				
		TIM DING					
		PRODUCT SPEC					
		-		NAME			
		APPLICATION SPEC		ANTI-ROTATIONAL RING TONGUE TERMINAL			
		-		STUD DIA. 4.3; M4			
		WEIGHT	0.4g approx.	SIZE	A 4	CAGE CODE	00779
		Customer Drawing		DRAWING NO	C-2825152	RESTRICTED TO	
				SCALE	5:1	SHEET	1 OF 1
						REV	A1