


LDC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		A	INITIAL REVISION	25JAN2016	BM	GS

HT33-SDE DIE SET (WITH LOCATOR)

2.5 SYST. 0.5 - 1.0 SQ MM FOR HAND TOOL 1579024-7


Matrize / DIE SET



Verarbeitungsspezifikation / Application Specification:
114-18031-1

Bedienungsanleitung (DE/EN) / Operation manual (DE/EN):
411-18581 / 1-744017-0 Basic Hand Tool
411-18601 / 4-744017-1 HT33-SDE DIE SET

Positionierer / LOCATOR

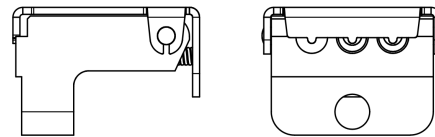

Anwendungsbereich / Application range:

Leiterquerschnitt Cross section range mm²	Crimphöhe Leiter Crimp height wire ±0,05	Crimpbreite Leiter Crimp width wire +0,15	Crimphöhe Isolation Crimp height insulation ±0,1	Crimpbreite Isolation Crimp width insulation ±0,1	Kontakt-Typ: Contact Type:	Kontakt TE Contact TE Nr./No.:
0,5	1,23	2,05	2,35	2,9	2,5 Syst. 0,5-1,0mm²	927797-2 Stift / Pin 927785-2 Buchse / Socket
0,75	1,33	2,05	2,4	2,9		
1,0	1,43	2,05	2,45	2,9		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. Muth	25JAN2016	STE TE Connectivity
		CHK G. Stegmayer	25JAN2016	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. Stegmayer
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC
MATERIAL		FINISH		APPLICATION SPEC
		WEIGHT 0.07 kg		NAME HT33-SDE DIE SET, 2.5 SYST. 0.5-1.0 SQ MM HT33-SDE Matrize, 2.5 Syst. 0.5-1.0 qmm
		CUSTOMER DRAWING		SIZE A3
				CAGE CODE 00779
				DRAWING NO 3-1579017-1
				RESTRICTED TO —
				SCALE
				SHEET 1 OF 1
				REV A