


PRINT DIST

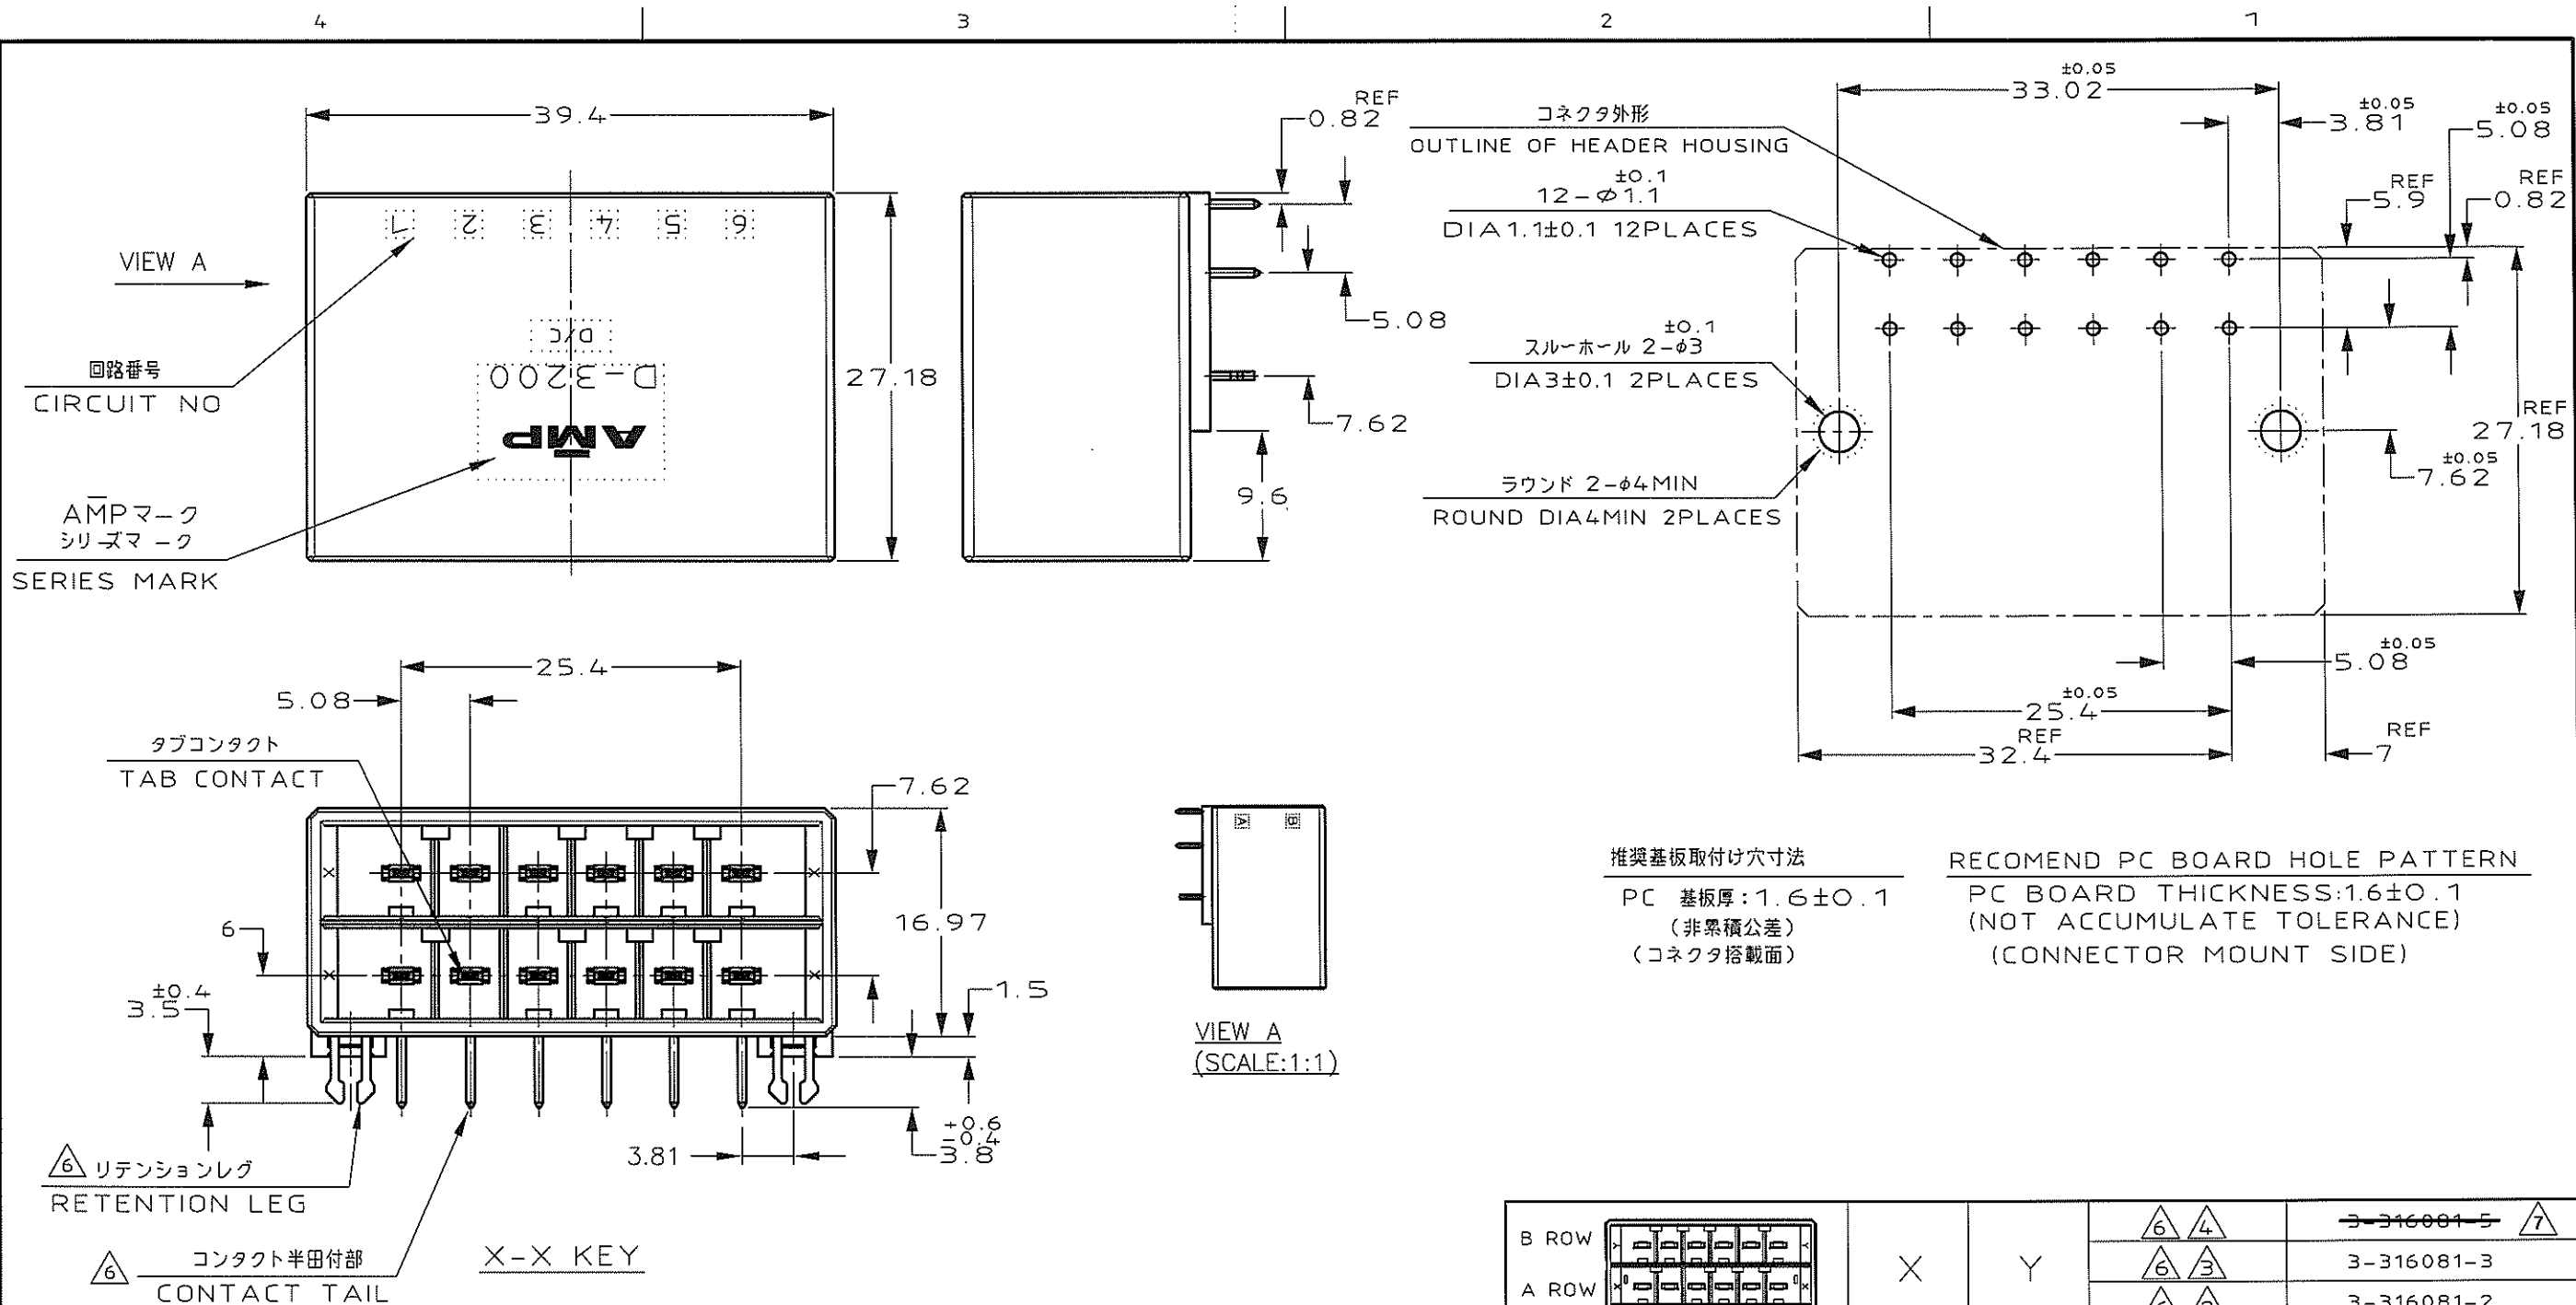

NOTES

1. MATERIAL:HOUSING:GLASS FILED THERMO
PLASTIC,POLYESTER(94V-0),COLOR:BLACK
CONTACT:COPPER ALLOY
RETENTION LEG:COPPER ALLOY

2. FINISH(CONTACT AREA): 0.38 μ m PdNi & Au PLATING OVER NICKEL

3. FINISH(CONTACT AREA): 0.76 μ m PdNi & Au PLATING OVER NICKEL

4. FINISH(CONTACT AREA):2.0 μ mMIN TIN
PLATED OVER NICKEL

~~5. FINISH(RETENTION LEG): TIN LEAD PLATED
(CONTACT TAIL) OVER NICKEL~~

6. FINISH(RETENTION LEG): TIN PLATED
(CONTACT TAIL) OVER NICKEL

7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

B ROW		X	Y		3-316081-5	
A ROW					3-316081-3	
					3-316081-2	
B ROW		Y	Y		2-316081-5	
A ROW					2-316081-3	
					2-316081-2	
B ROW		X	X		1-316081-5	
A ROW					1-316081-3	
					1-316081-2	
KEYING LOCATION		A ROW KEYING	B ROW KEYING	FINISH	製品番号	PART NO.

TE Connectivity

WIRE RANGE		INSULATION DIA		NAME 12 POS DOUBLE ROW HORIZONTAL HDR ASS'Y FOR DYNAMIC D-3200			
mm ² /AWG		mm					
MATERIAL SEE NOTE 注記参照		FINISH SEE NOTE 注記参照		一般公差 (GENERAL TOLERANCE) 10mm : ±0.3 10mm 30mm : ±0.4 30mm 100mm : ±0.45 角度 : ±3°			
DR. 4/7JUL/95 K.IKEDA		DE. 4/7JUL/95 K.IKEDA					
CHK. 4/7JUL/95 Y.ISHIKAWA		APP. 4/7JUL/95 S.MANABE		SIZE A3		LOC J	NUMBER C-316081
				SCALE 2-1		REV. C	SHEET 1 OF 1