

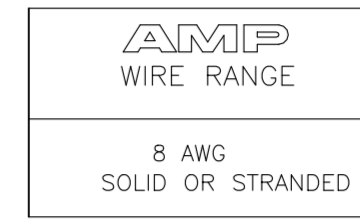


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	T4	REVISED PER ECN-22-150900	22APR2022	RK	CSD

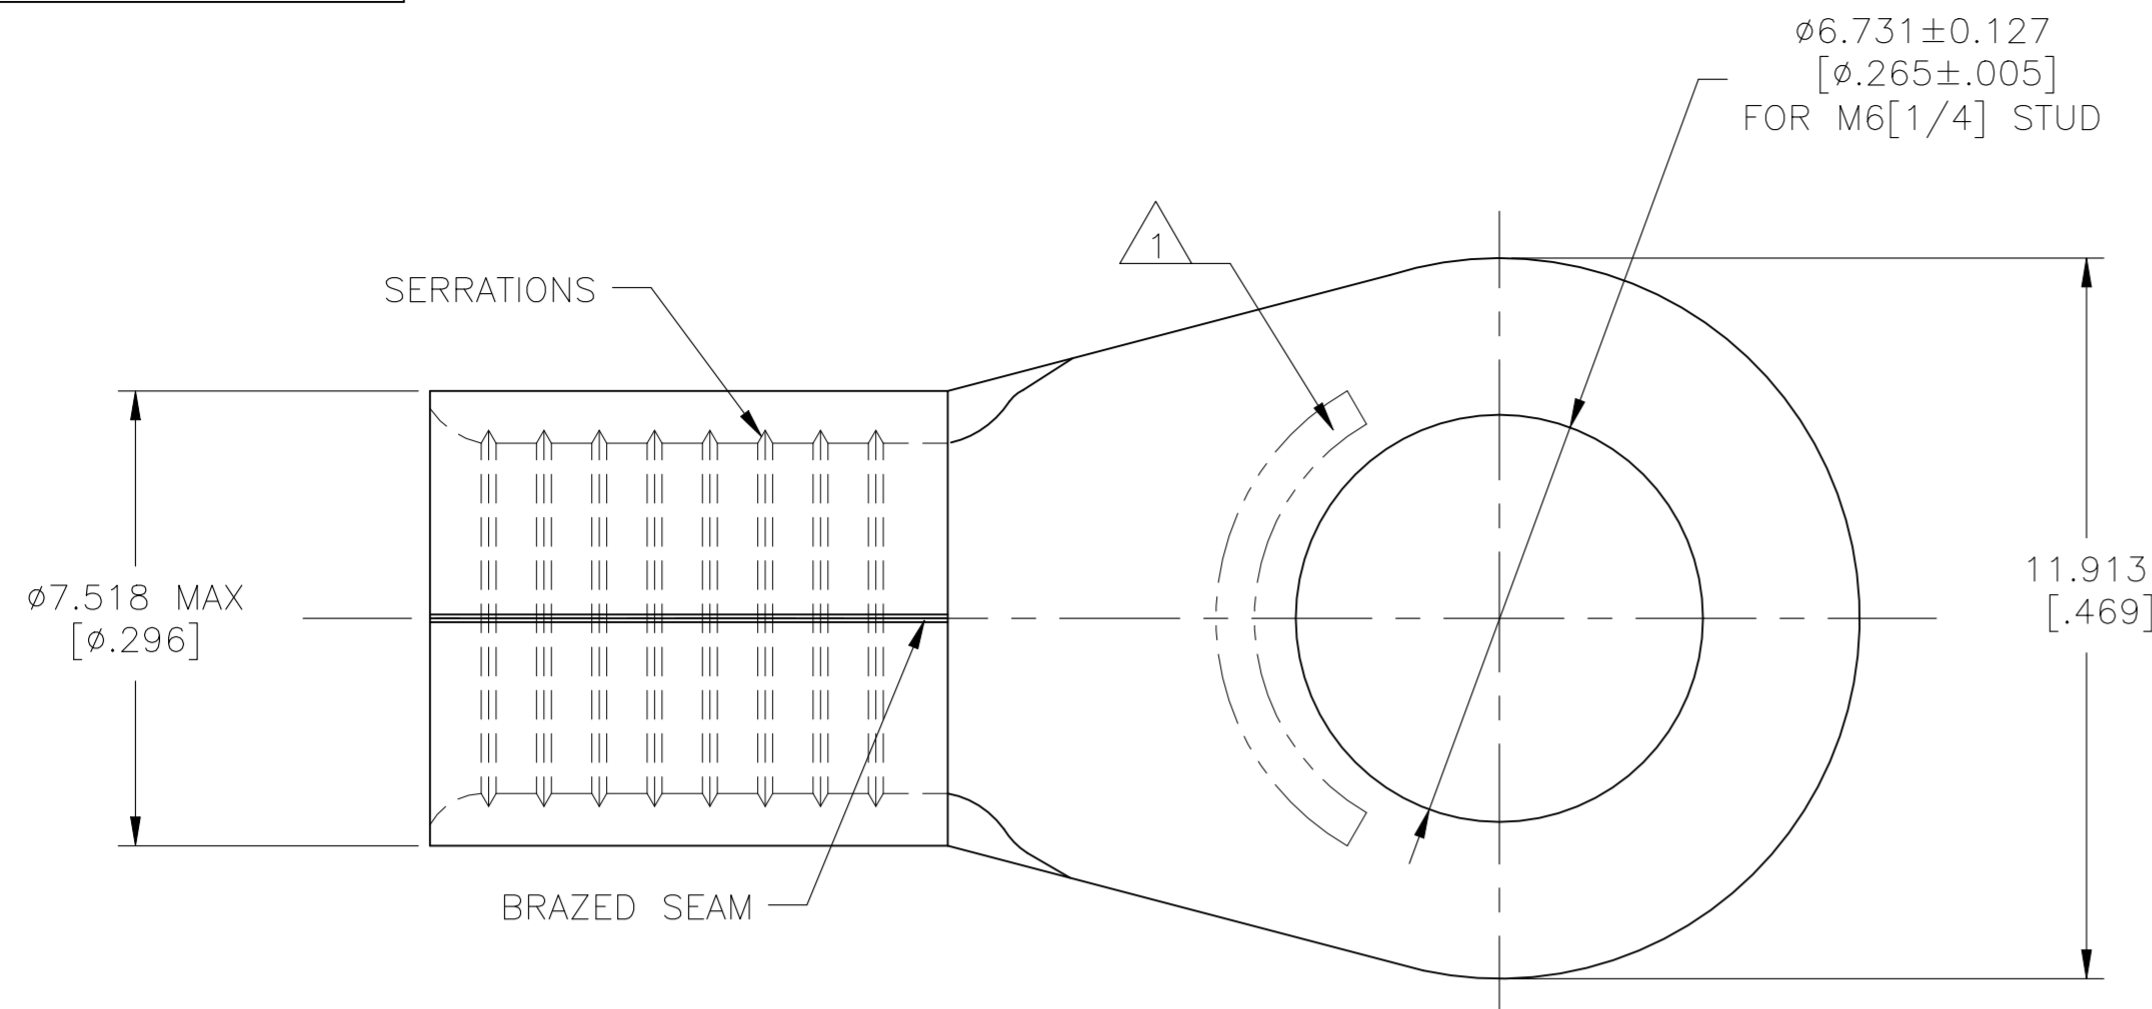

- 1 STAMP AMP 8* APPROX AS SHOWN
- 2 UL LISTED E13288, 8 AWG STRANDED
- 3 CSA CERTIFIED LR7189, 8 AWG SOLID OR STRANDED
- 4 NOTE DELETED
- 5 SUPERSEDED BY 8-33461-1
- 6 TIN PLATE 0.00254 [.000100] MIN THK PER ASTM B545
- 7 NOTE DELETED
- 9 NOTE DELETED
- 10 UL 486 A-B

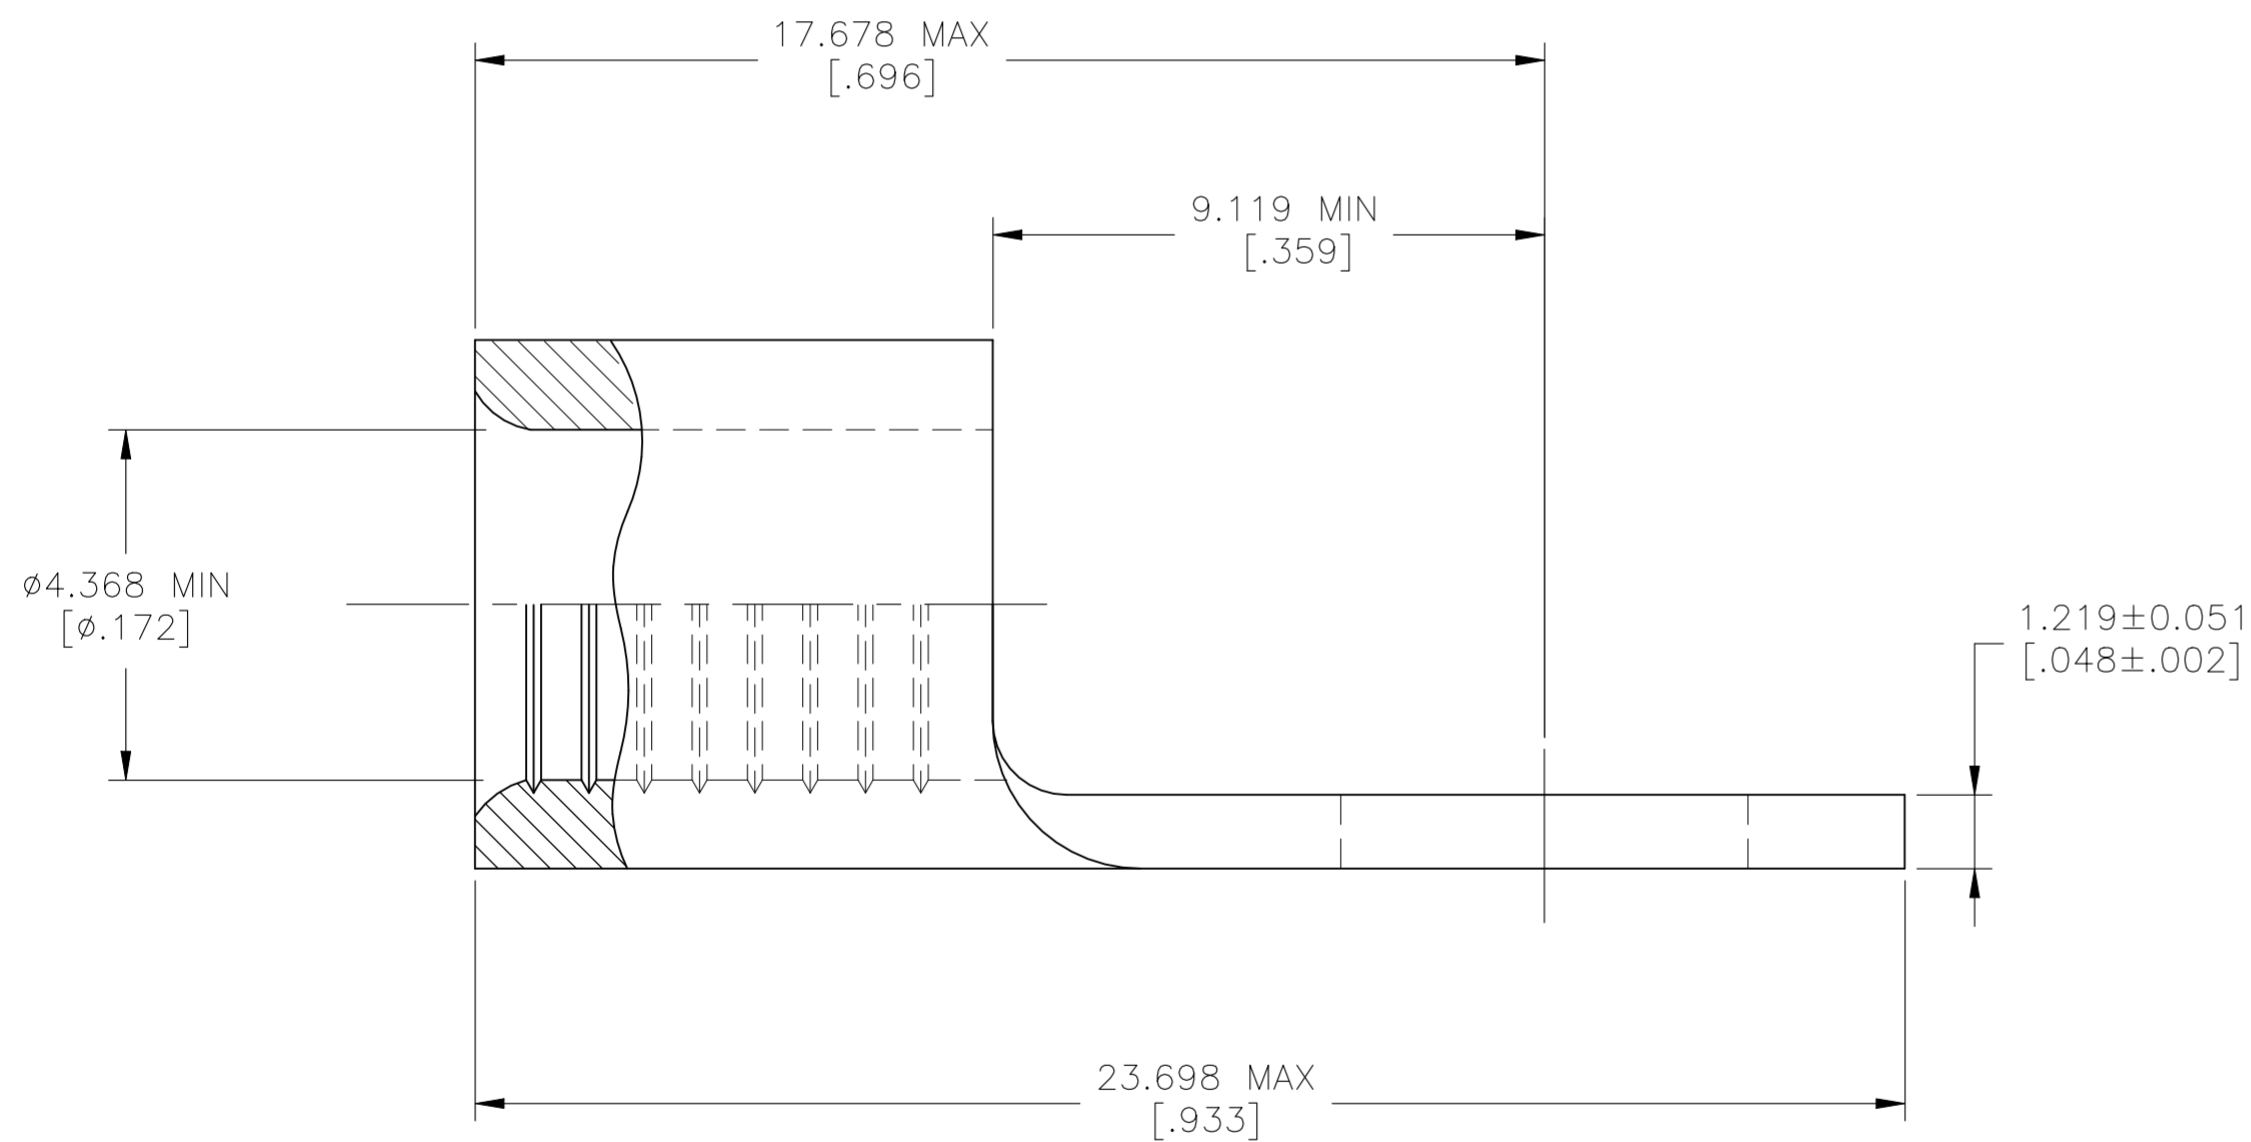

2 3	6	100	LOOSE PIECE, BOX	8-33461-1
2 3	6	1000	33461 TAPE MOUNTED ON 30.48[1.200] CENTERS	2-33461-3
2 3	6	1500	33461 TAPE MOUNTED ON 15.24[.600] CENTERS	2-33461-2
2 3	6	100	LOOSE PIECE	33461
APPROVALS	FINISH	QTY	PACKAGE TYPE	PART NO.

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TA BRINKMAN 3-24-93 CHK DA PATTERSON 3-24-93 APVD JL MECKLEY 3-24-93	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 170°C [338°F] MAX VOLTAGE RATING: NOT APPLICABLE	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -	APPLICATION SPEC: - WEIGHT: -	NAME: TERMINAL, RING TONGUE, SOLISTRAND 8 AWG SIZE: A2 CAGE CODE: 00779 DRAWING NO: C-33461
FOR APPLICATION TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE, 6.6-10.5mm²[13,100-20,800] CIR MILS SOLID OR STRANDED	MATERIAL: COPPER PER ASTM B-152 ANNEALED	FINISH: -	CUSTOMER DRAWING	RESTRICTED TO: -
FOR ORDER ENTRY 1-800-526-5142	SCALE: 8:1 SHEET: 1 OF 1 REV: T4				