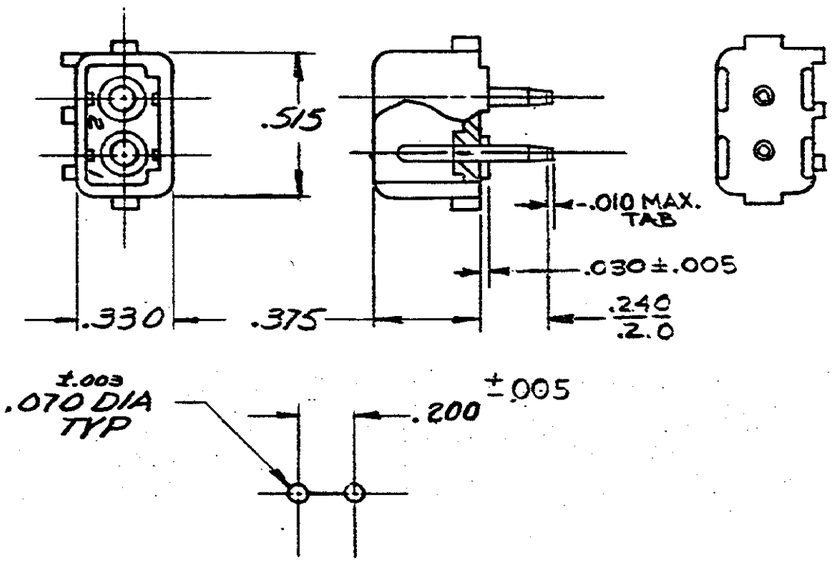

RECOMMENDED LAYOUT FOR .125 THICK P.C. BOARD

1. PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-3
2. DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

350422-1	NYLON - NAT.	ALLOY COPPER PRE-TIN
ASSEMBLY NO.	HSG. MATL & COLOR	PIN MATL & FINISH

©1973 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY REFERENCE ONLY

J	RESTORED	BXD	RS	4-1-85
J	REV. PER M-7375	SS	QM	8-27-85
H	250/500 WAS .250, M-7285	DAS	DH	3/11/85
G	ADDED NOTE 2, M-6694	MSF	DH	1/25-81
F	REV. TAIL LENGTH M-5334	MF	DH	5-24-77
E	REVISED M-4161	MF	DH	3-7-77
D	ECN M-3871	PBH	DH	9-4-76
C	ECN M-3452	GY	RR	7/16/76
B	ECN- M-3156	EQ	DRA	2/24/76
A	REDRAWN ADDED COLORS	PED	Evw	1/26/73
LTR	REVISION RECORD	DR.	CHK	DATE

L1	REVISED PER ECR-21-117185	PJ / VS	20OCT2021	
L	OBSOLETE -2 PER ECN CM-2709	NW / RS	6-26-92	
K	OBSOLETE 1-1, 2-1, 3-1, 4-1, 5-1, 6-1, 7-1, 8-1, 9-1, 1-2, 2-2, 3-2, 4-2, 5-2, 6-2, 7-2, 8-2, 9-2 CM 473	KW / RS	4-12-86	

NUMBER 350422

REQUIRED PER ASSEMBLY

DESCRIPTION

DR	6-21-73 G. Edamura
CHK	6-25-73 E Cramer
OK	
APP	Ron Gaitan

MATERIAL AND FINISH: SEE TABLE.

WIRE - RANGE - INSULATION: —

TOLERANCE EXCEPT AS NOTED: ±.015 ±1° 0'

SCALE: —

CLASS: H

TYPE: H

LOC: CM | B | NO 350422 | L1

NAME: 2 CIRCUIT MATE-N-LOK P.C. BOARD HEADER

TE Connectivity

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

AP 1253 REV 11/65