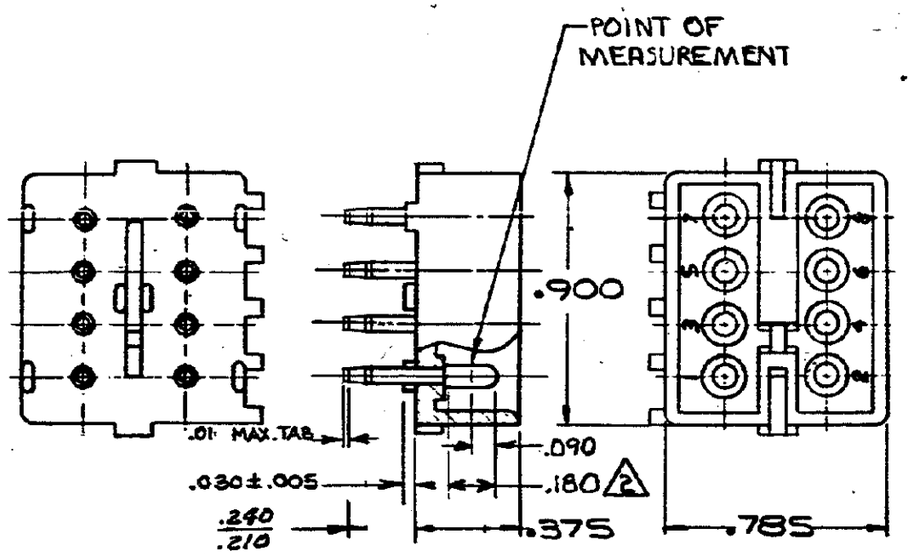

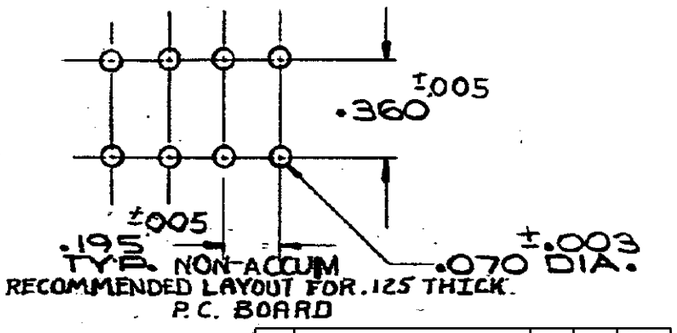

1. PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-3

2 CONTACT IS PLATED OVERALL WITH .000050 NICKEL; THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING- PER D.RENAUD/D.SINISI

3 OBSOLETE ~~350426-2~~	NYLON - NATURAL	COPPER ALLOY - GOLD 2
350426-1	NYLON -: NATURAL	COPPER ALLOY - PRE-TIN
ASSEMBLY NO.	HGS. MATL.- COLOR	PIN MATL. - FINISH

4. DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY occur AND SHOULD BE ACCOUNTED FOR.

LTR	REVISION RECORD	DR	CHK	DATE
L3	REVISED PER ECR-21-117185	PJ	VS	20OCT 2021
L2	REV PER ECO-10-000445	KK	AEG	09JAN
K	OBS 9-1 PER CM 2213	TB	RS	3/20/69

NUMBER 350426

REQUIRED PER ASSEMBLY

DESCRIPTION

DWG SIZE | NUMBER | NAME | REMARKS | ITEM NO

© 1978 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY REFERENCE ONLY

DR 9. Coleman 6-27-73

CHK E Cramer 6-28-73

APP

MATERIAL AND FINISH: SEE TABLE

PLASS

WIRE - RANGE - INSULATION

TOLERANCE EXCEPT AS NOTED ±.015 ±1° 0'

SCALE

LOC CM B NO 350426 REV L3

NAME 8 CIRCUIT MATE-N-LOK P.C. BOARD PIN HEADER

TE Connectivity

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

PRINT DIST 1 53

AMP 1253 REV 11/65

S

D C B A

7 6 5 4 3 2 1