
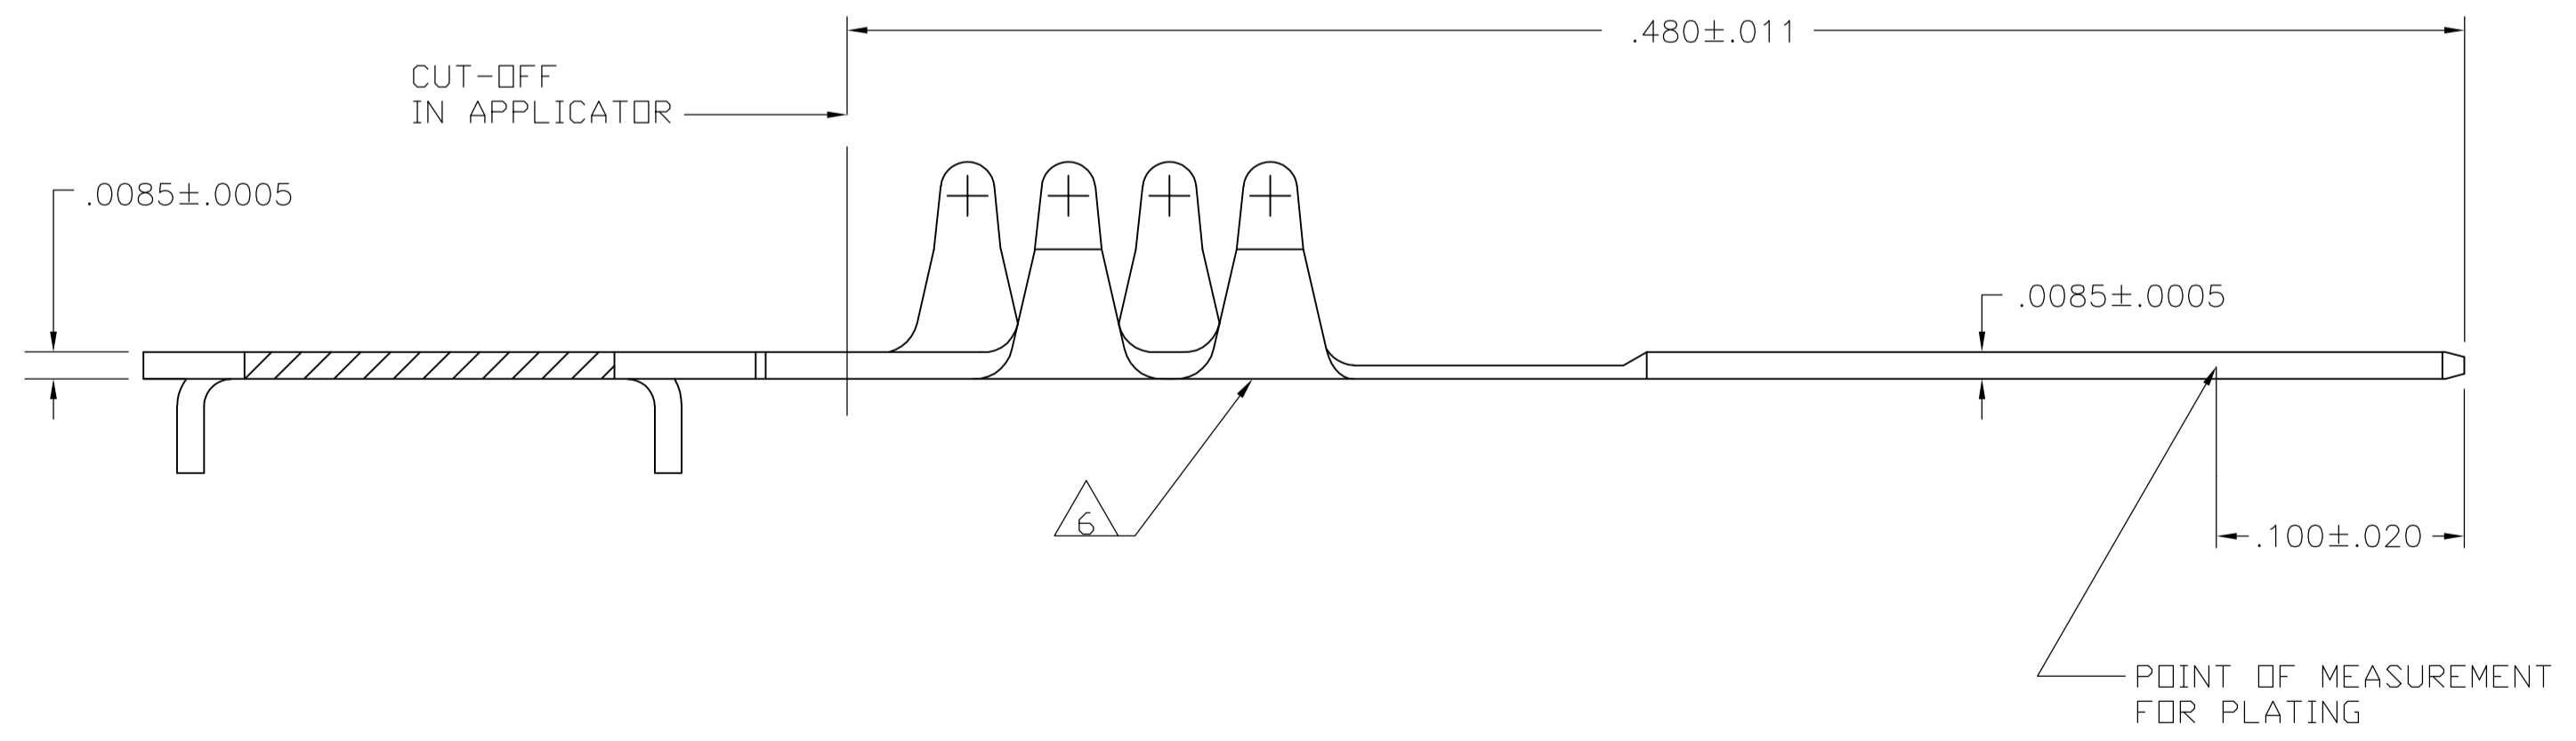


- 1 BRIGHT TIN/LEAD .000100 MIN THICK OVER NICKEL .000050 MIN THICK ON ENTIRE CONTACT.
- 2 NICKEL .000030 MIN THICK UNDERPLATE WITH GOLD .000015 THICK ON MATING AREA AND TIN/LEAD .000100 MIN THICK ON CRIMP AREA.
- 3. PRODUCT REQUIREMENTS PER 108-18022.
- 4. TO BE APPLIED PER 114-16008.
- 5 .000100 MIN TIN IN TAB AREA, GOLD FLASH IN CRIMP AREA, BOTH OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
- 6 GOLD PLATING MAY OR MOY NOT BE PRESENT ON THE BOTTOM OF THE CRIMP BARREL.

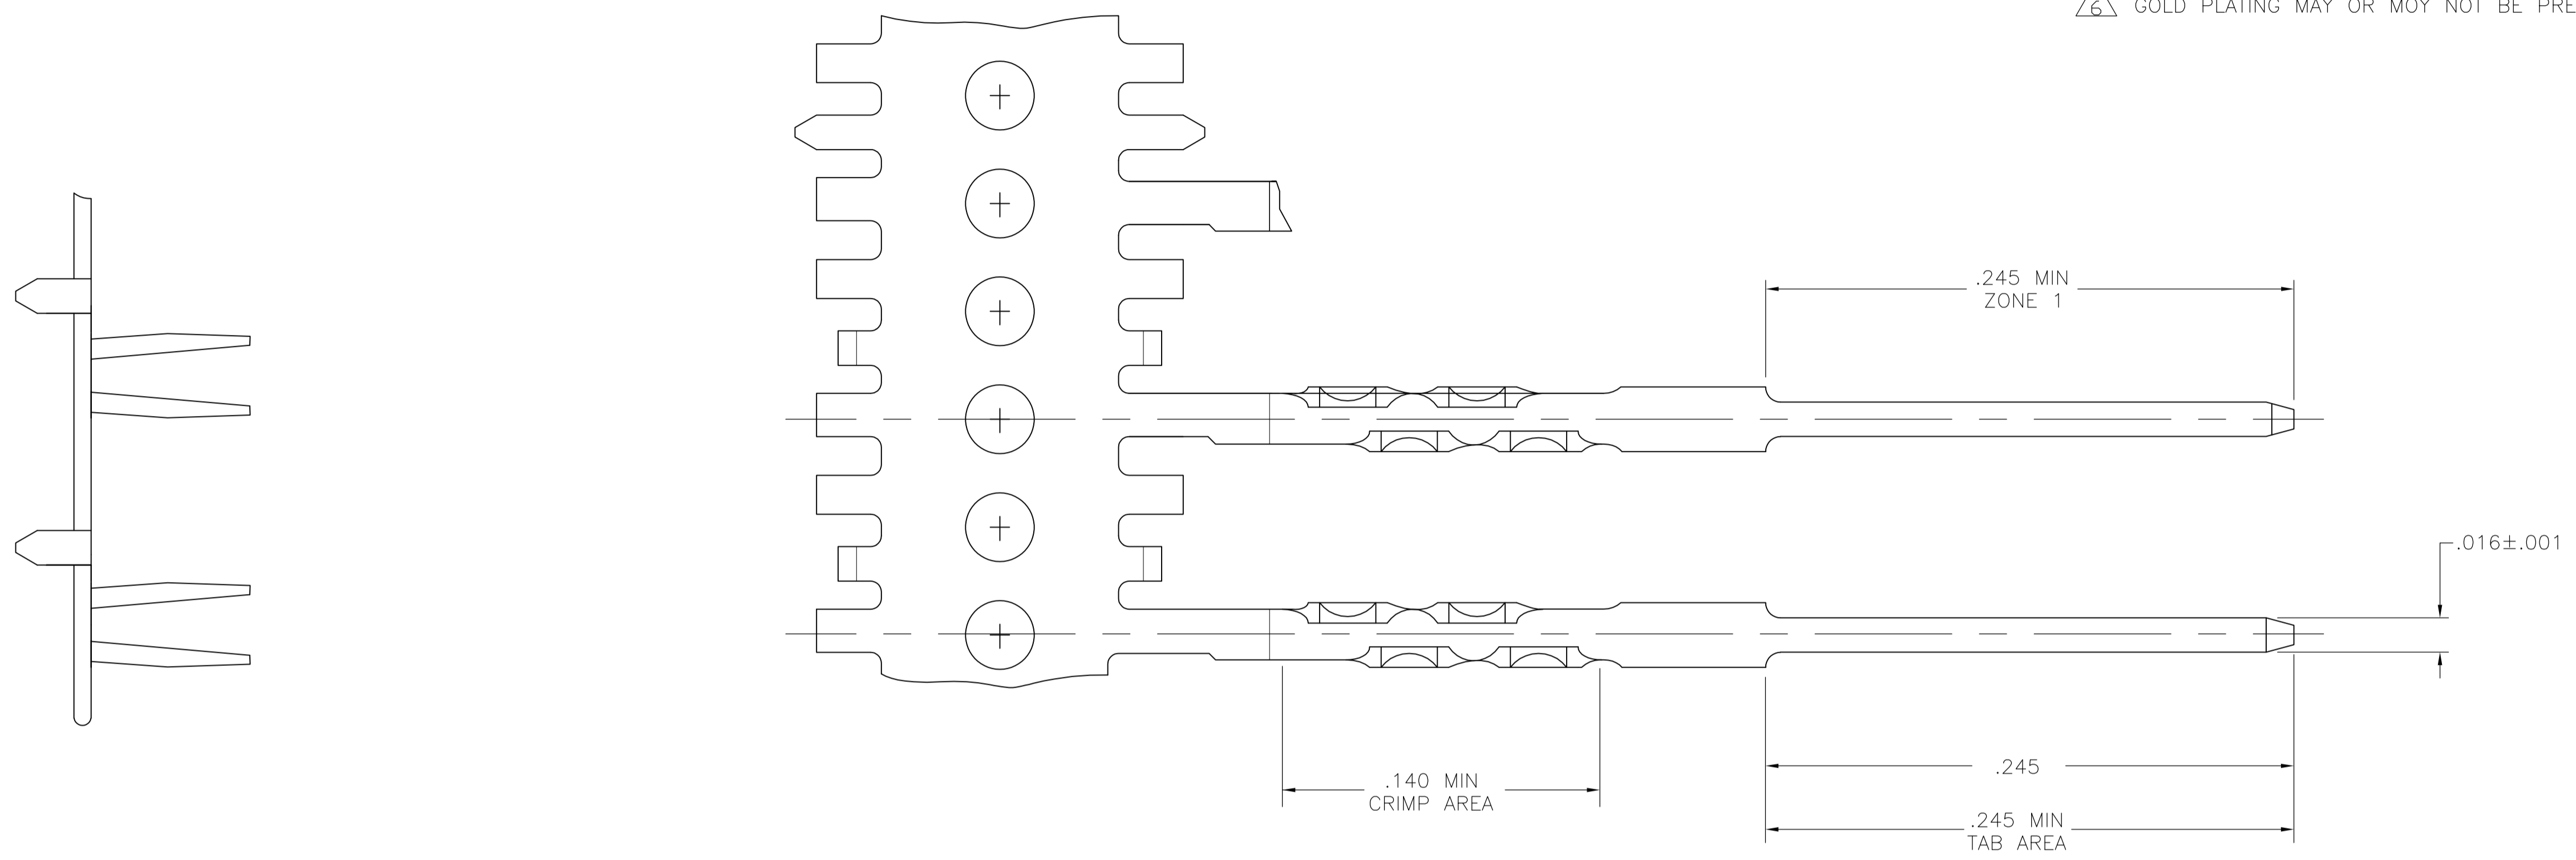

	5	6	487561-4
OBSOLETE	2		487561-3
	1		487561-1
FINISH			PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN B. MCMMASTER 01MAR04	Tyco Electronics Corporation Harrisburg, PA 17105-3608
0 PLC ± -	1 PLC ± -	CHK S. BOLASH 01MAR04	
2 PLC ± -	3 PLC ± .005	APVD M. WALMSLEY 01MAR04	NAME CONTACT, SOLDER TAB, .050 C/L
4 PLC ± -	ANGLES ± -	PRODUCT SPEC	APPLICATION SPEC
MATERIAL PHOS BRONZE	FINISH SEE TABLE	WEIGHT	SIZE CAGE CODE DRAWING NO. RESTRICTED TO
			A1 00779 C=487561
		CUSTOMER DRAWING	SCALE 20:1 SHEET 1 OF 1 REV J