

D

C

B


A

D

C

B

A

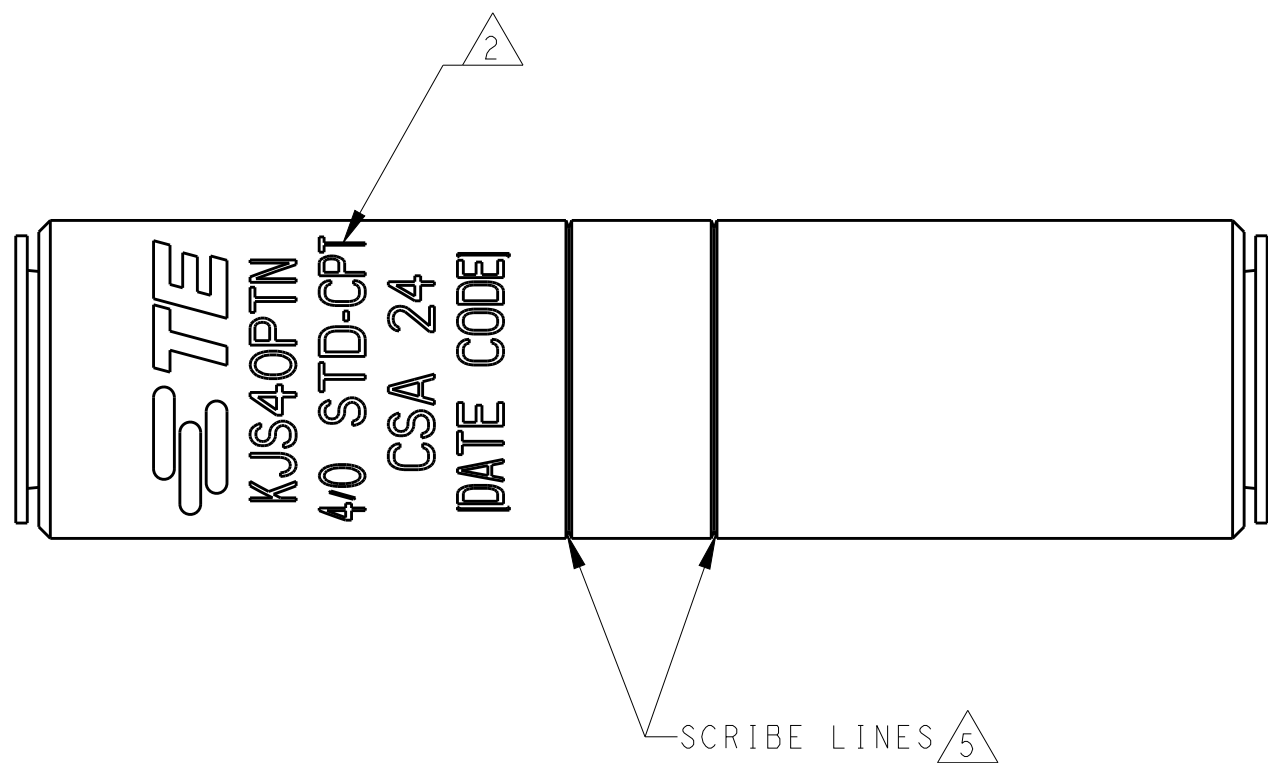

1. ACCOMMODATES:
4/0 AWG STD-CPT (.528-.475 DIA) CONDUCTORS.

2. MARKING:
TE
[CATALOG NO]
[CONDUCTOR SIZE]
[DIE SIZE]
[DATE CODE]


(SEE TABLE FOR CATALOG NO,
CONDUCTOR SIZE & DIE SIZE)

3. HARDNESS:
SOFT TEMPERED.

4. CONNECTOR BARREL CONTAINS FACTORY
APPLIED INHIBITOR AND IS CAPPED.




5. DO NOT CRIMP BETWEEN SCRIBE LINES.

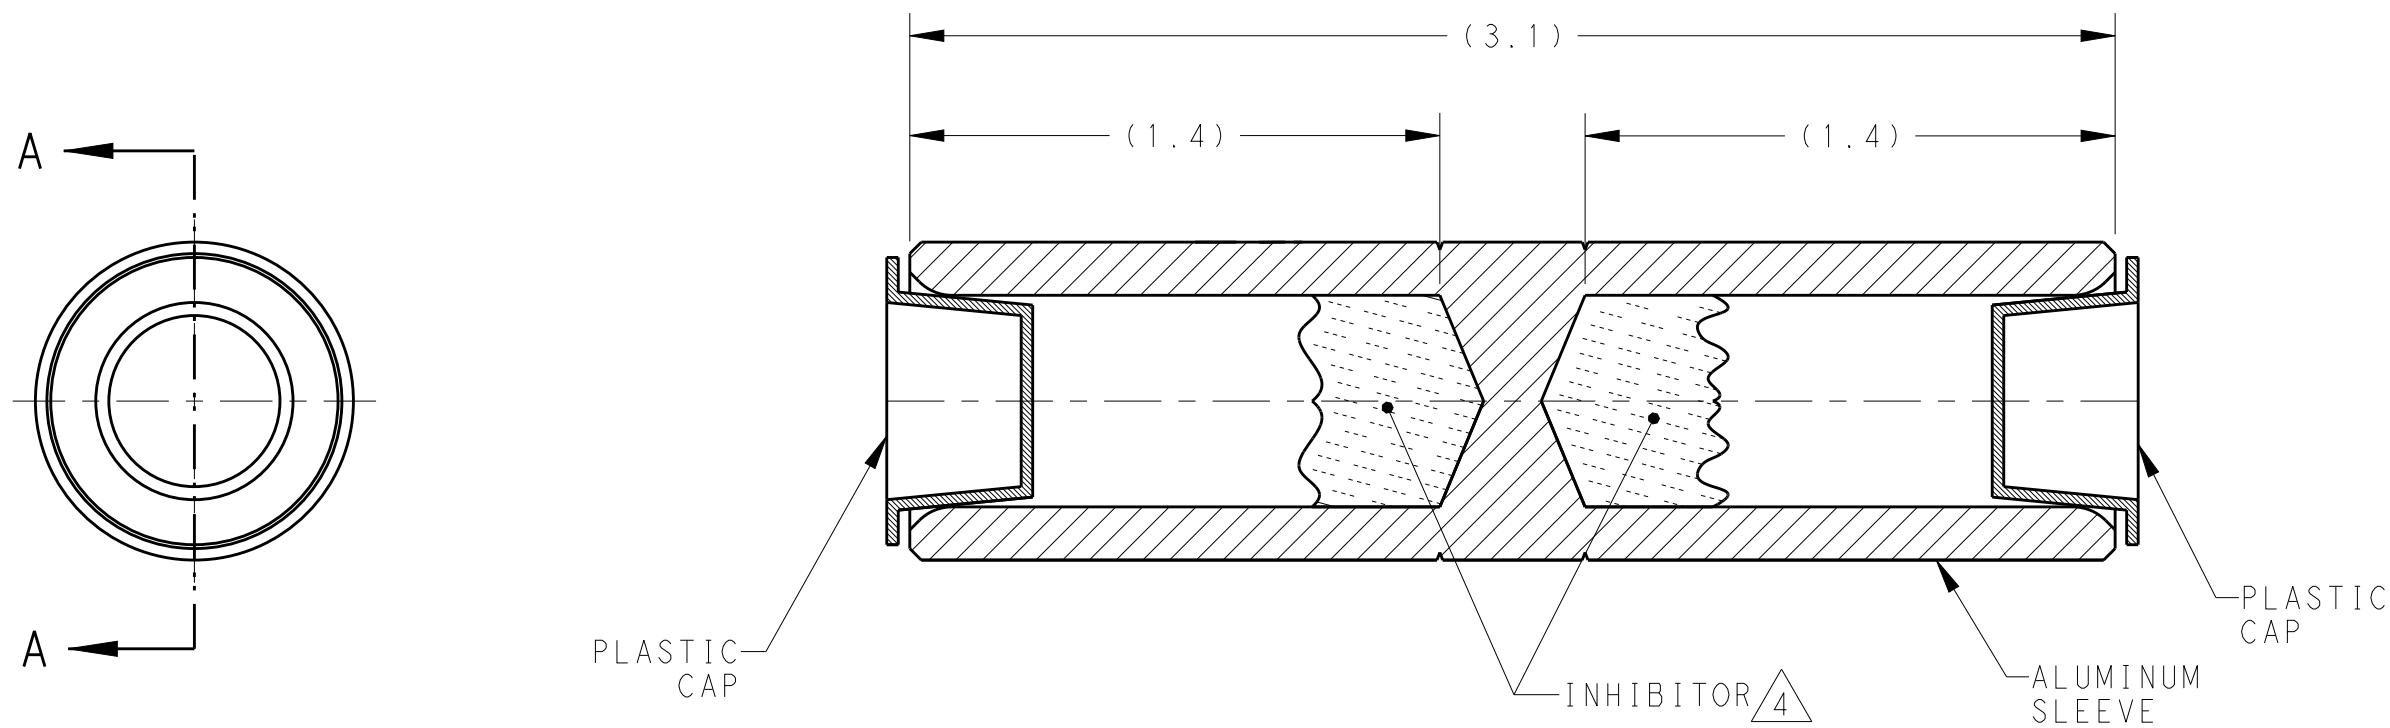6. ALL DIMENSIONS ARE FOR REFERENCE ONLY.



SECTION A - A

TIN PLATED	CSA 24	4/0 STD-CPT	KJS40PTN	5-1199156-9
FINISH	DIE SIZE	CONDUCTOR SIZE	CATALOG NO.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. MURUGIAH 29 JUN 2006		 TE Connectivity			
DIMENSIONS: INCHES		CHK A. BULZA 04 JUL 2006					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B. JOHNSON 04 JUL 2006		NAME ALUMINUM COMPRESSION SLEEVE, 4/0 AWG STD TO COMPACT CONDUCTORS		
	0 PLC ±		PRODUCT SPEC				
	1 PLC ±		-				
	2 PLC ±		APPLICATION SPEC				
	3 PLC ±		-		SIZE A200779		
	4 PLC ±		-			CAGE CODE C-5-1199156-9	
	ANGLES ±		WEIGHT				DRAWING NO C-5-1199156-9
	FINISH		-				
MATERIAL		CUSTOMER DRAWING		SCALE NTS			
SEE DWG		SEE TABLE			SHEET 1 OF 1		
						REV B	