

KEYING FEATURE

POLARIZATION FEATURE

3.50
(.138)

24.89 ±.38 (0.980±0.015)

12.70
(.500) REF

1.50
(.059)
TYP

20.12
(.792) REF

19.96
(.786) MAX

5.00
(.197)
3PLC

9.20
(.362)
MAX

AMP

REVISIONS							
P	LTR	DESCRIPTION			DATE	DWN	APVD
R1		REVISED PER	ECR-22-139241		17MAY2022	G.R	Z.L
R2		ECR-22-149141			24AUG2022	LZ	FL

1 ACCEPTS RECEPTACLE CONTACTS 1217378(#18-#22 AWG SINGLE WIRE), 1217094(#18-#14 AWG SINGLE WIRE) AND 1217095 (TWO #18'S OR TWO #16'S OR A #16 + #18 COMBINATION).


2 FRONT AND BACK VIEWS SHOW ONLY THE GRIPPERS. FOR KEYING AND POLARIZATION FEATURES, SEE SPECIAL FRONT VIEW.

3 MOLDED WITHOUT GRIPPERS.

4 PRELIMINARY - NOT FOR PRODUCTION.


5 GWEPT 750°C NO FLAME.

6 PRE-PRODUCTION - FASR REQUIRED

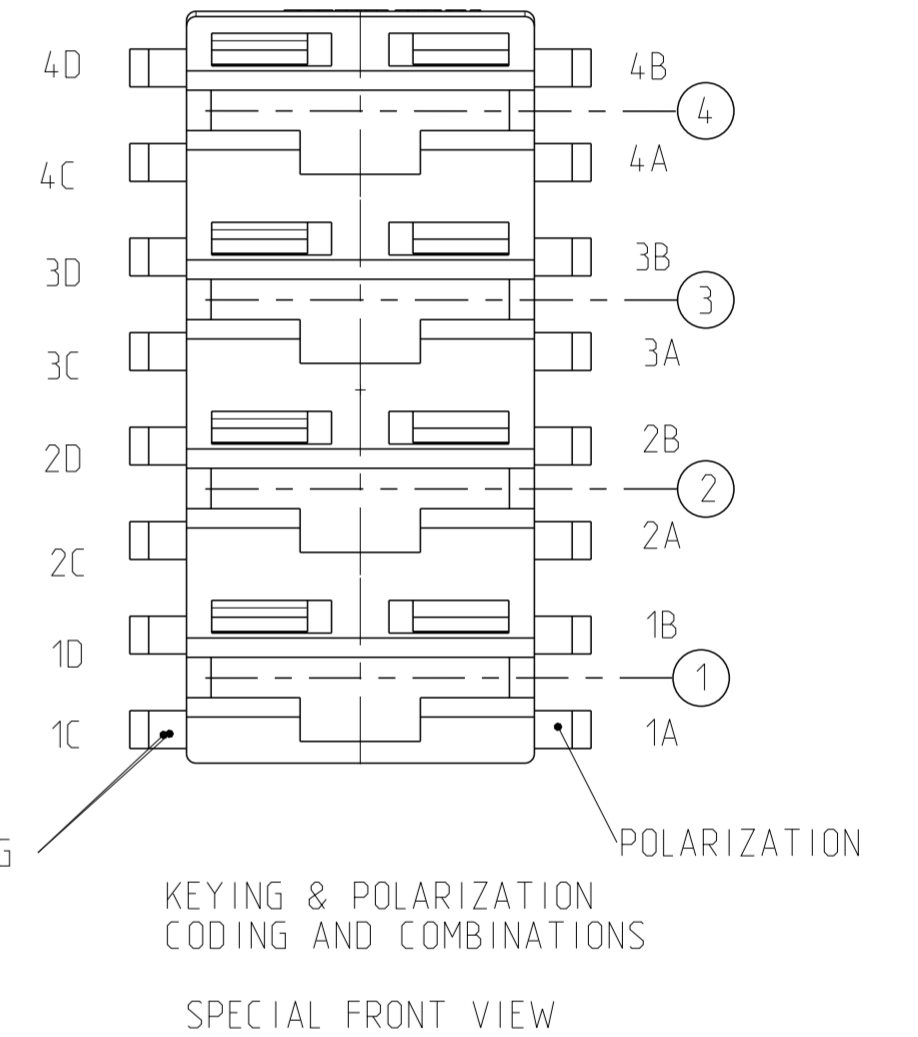

GRIPPERS 3

	NATURAL	2D	1B,3A	521206-8	5
04-A	NATURAL	3C,4D	1B	521206-7	5
-	BLUE	1C,2C,3C,4D	1A,1B,2A,3B,4A,4B	521206-6	4
04-C	BLUE	4D	1A,4B	521206-5	4
-	BLUE	NONE	NONE	521206-4	4
-	NATURAL	3C,4D	1B	521206-3	6
-	BLUE	NONE	NONE	521206-2	4,3
04-A	BLUE	3C,4D	1B	521206-1	
RAST CONFIGURATION	FINISH/ COLOUR	KEYING FEATURE	POLARIZATION FEATURE	PART NUMBER	

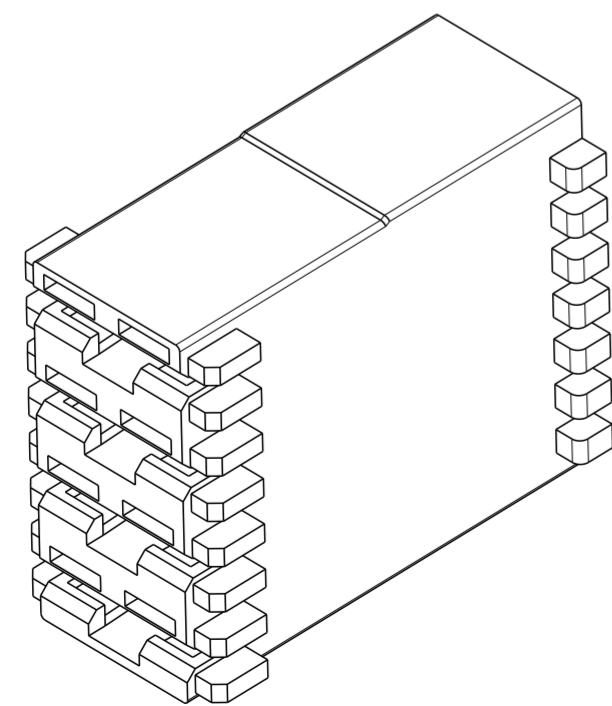

3D VIEW

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	28APR2022	TE Connectivity	
DIMENSIONS: mm		CHK	MS FEHER			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	E HOWARD		NAME HOUSING, RECEPT, POSITIVE-LOCK, MKIII, 6.35 [1.250] SERIES, 4 POSITION	
0 PLC ±-		PRODUCT SPEC				
1 PLC ±-		APPLICATION SPEC			SIZE	CAGE CODE
2 PLC ±0.25(0.010)		WEIGHT			A2	00779
3 PLC ±-					DRAWING NO	521206
4 PLC ±-					RESTRICTED TO	
ANGLES ±-					SCALE	5:1
FINISH SEE TABLE					SHEET	1 OF 1
MATERIAL NYLON		CUSTOMER DRAWING			REV	R2