


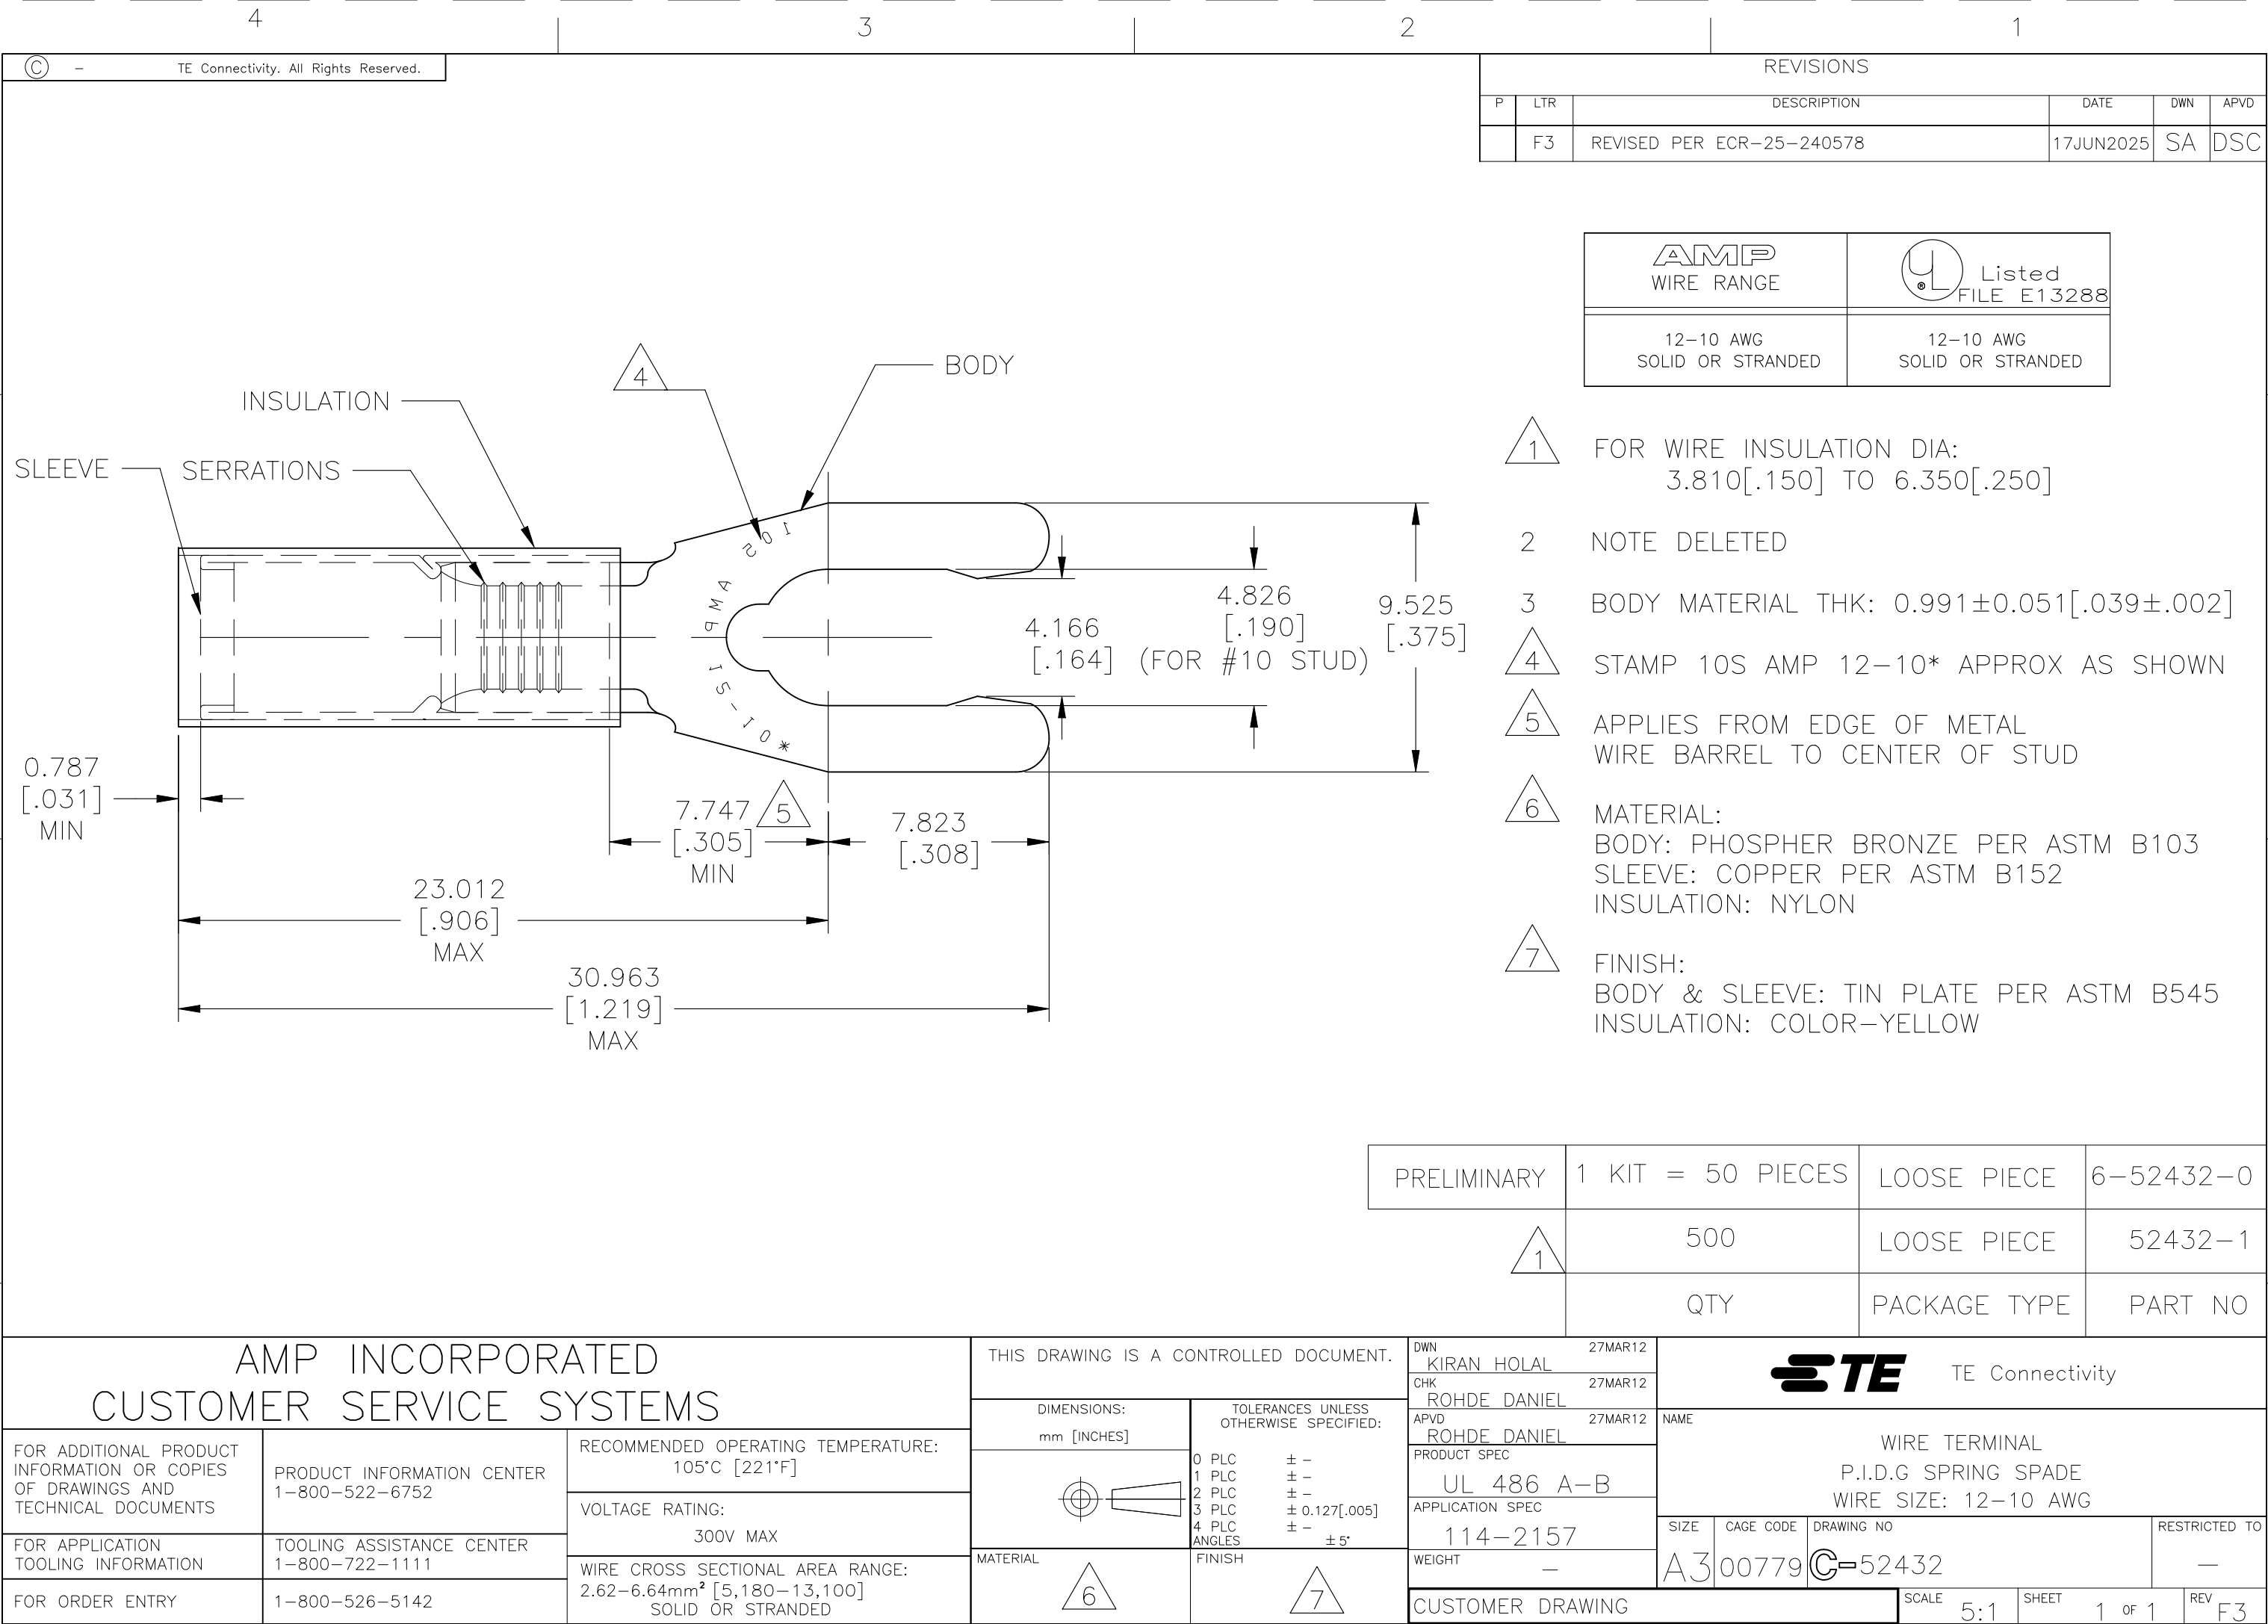

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F3	REVISED PER ECR-25-240578	17JUN2025	SA	DSC

AMP WIRE RANGE	 Listed FILE E13288
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

PRELIMINARY	1 KIT = 50 PIECES	LOOSE PIECE	6-52432-0
1	500	LOOSE PIECE	52432-1
	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KIRAN HOLAL 27MAR12		 TE Connectivity					
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± 5°	CHK ROHDE DANIEL 27MAR12	NAME WIRE TERMINAL P.I.D.G SPRING SPADE WIRE SIZE: 12-10 AWG					
		VOLTAGE RATING: 300V MAX				FINISH 					APVD ROHDE DANIEL 27MAR12	
		WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm ² [5,180-13,100] SOLID OR STRANDED									PRODUCT SPEC UL 486 A-B APPLICATION SPEC 114-2157 WEIGHT -	SIZE A3
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111						CUSTOMER DRAWING			SCALE 5:1	SHEET 1 OF 1	REV F3
FOR ORDER ENTRY	1-800-526-5142											