


THREE CONDUCTOR CABLE, MODIFIED FLUOROPOLYMER INSULATED,  
 SPIRAL SHIELDED AND JACKETED, 600 VOLT, 200°C

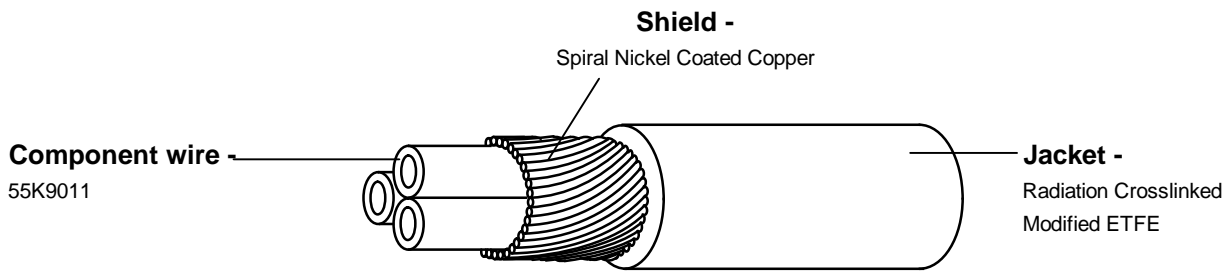

Part Description	Wire Size	Shield Size (mm)	Finished Wire Resistance (Ω/km) Max	Jacket Thickness (mm)		Overall Diameter (mm)			Weight (kg/km)	
				Lower Spec Limit	Target	Lower Spec Limit	Target	Upper Spec Limit	Target	Upper Spec Limit
55K9513-24-2/6/4-6L	24	0.08	117.42	0.15	0.20	2.36	2.48	2.60	13.46	15.55
55K9513-22-2/6/4-9	22	0.08	61.80	0.15	0.20	2.67	2.80	2.94	17.45	20.66
55K9513-20-2/6/4-6L	20	0.10	34.20	0.15	0.20	3.22	3.38	3.55	27.89	32.66
55K9513-18-2/6/4-9	18	0.10	21.73	0.15	0.20	3.72	3.90	4.10	39.21	46.64

COLOUR CODE: Core - Red (2)/ Blue (6)/ Yellow (4)  
 Jacket - Size 24 and 20 Pale Blue (6L)  
 Size 22 and 18 White (9)

PERFORMANCE REQUIREMENTS: To be tested to issue in effect of WSD840 and meet the requirements of ABS0825 Issue 4.

MARKING: Core only, every 300 ± 50mm horizontally along axis for sizes 20 & 18 and vertically along axis for size 22 and 24. Colour Black.

--- **BJXX U GBSYY** ---

Where the XX is replaced by the wire size and the YY is replaced by a year code designator in accordance with the table below.

e.g. --- BJ24 U GBS12 ---

Jacket only, every 300 ± 50mm horizontally along axis, Colour Black

--- **UCZZ U GBSYY** ---

Where the ZZ is replaced by the wire size and the YY is replaced by a year code designator in accordance with the table below.

e.g. --- UC24 U GBS12 ---

Each mark shall be connected by a dashed line, each dash at 40 - 50mm, 5 mm long, with 0.5mm minimum width.

Code:	12	13	14	15	16	17	18
Year:	2012	2013	2014	2015	2016	2017	2018

APPROVAL: Electronic sign off - no signatures will appear.