


D


C

B

A

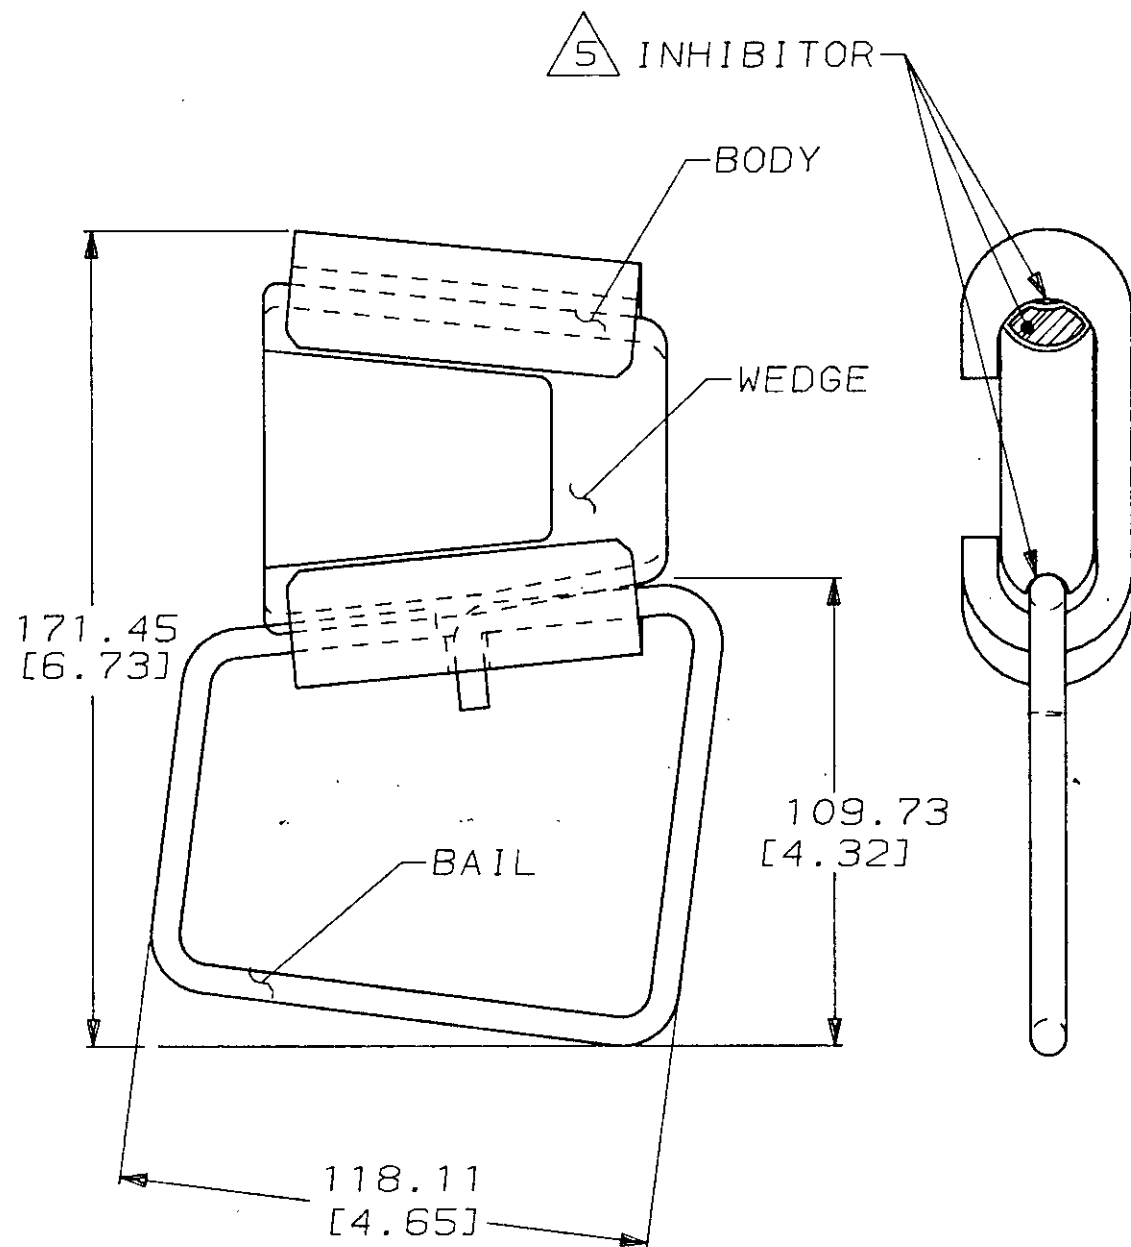

- 1 ALTERNATE WEDGE MAY BE SUPPLIED, FIT AND FUNCTION NOT AFFECTED.
- 2 FOR COMPLETE WIRE SELECTION RANGE, SEE GP 1931
- 3. FOR INSTALLATION AND OTHER PERTINENT INFORMATION, SEE 409-2106
- 4. USES YELLOW CARTRIDGE
- 5 INHIBITOR IS APPLIED AT FACTORY TO GROOVES OF BODY AND WEDGE

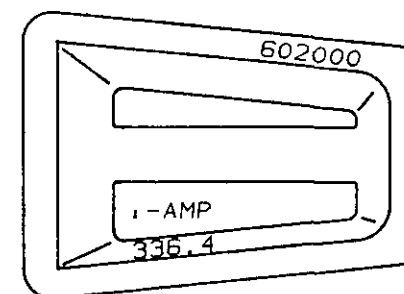

1 ALTERNATE WEDGE

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DRAWN BY: 18/NOV/94 D. RENNOX	<b>AMP</b> AMP of Canada Ltd Markham, Ontario	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED.	CHECKED BY: -	NAME STIRRUP ASSEMBLY, 336.4 WIRE TO 1/0 BAIL, AMPACT 2	
	0 PLC ±- 1 PLC ±- 2 PLC ±.75 [.03] 3 PLC ±- 4 PLC ±- ANGLES ±0°-30'	APPROVED BY: -	PRODUCT SPEC -	APPLICATION SPEC -
MATERIAL WEDGE & BODY - ALUMINUM ALLOY BAIL - COPPER	FINISH WEDGE & BODY-NONE BAIL-TIN PLATED	WEIGHT -	SIZE A3	CAGE CODE 00779
CUSTOMER DRAWING			DRAWING NO C-600474	SCALE NTS
			SHEET 1 OF 1	REV A

S. 600474.A.1.C plotted by DAVE on 02 DEC 1994 at 09:22:53 from <CAD/CAM>DEPTDRWG>WIP>U.126-94