


P	LTR	DESCRIPTION	DATE	DWN	APVD
	L2	REDRAWN AND REV BY ECO-16-005813	30JUN2016	HC	WLS
	L3	REVISED PER ECN-23-234636	11OCT2023	WLS	RE
	M	REVISED PER ECN-25-307751	07MAR2025	WLS	RE


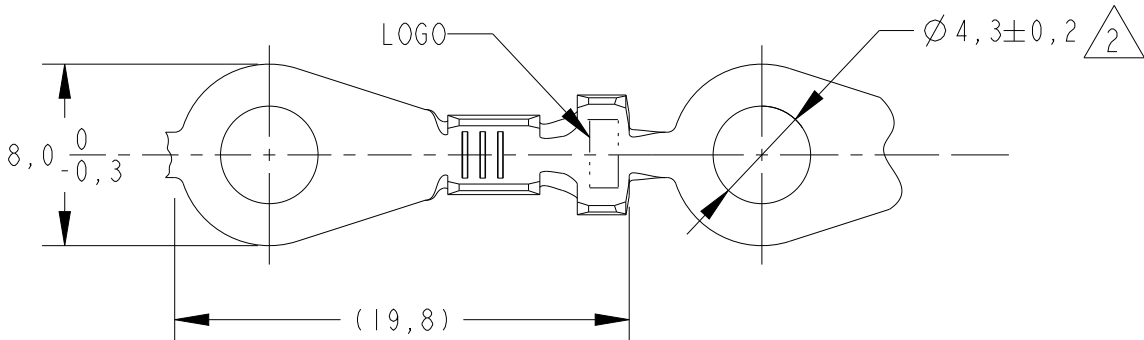


1 REELED WITH PAPER INTERLEAVE


2 Ø 4,3mm FOR M4 HOLE.

3 FOR STD CABLE : INS. CRIMPER "F" (Ø 1,78-3,06mm).
FOR THIN WALL CABLE INS. CRIMPER "OV" (Ø 1,3-1,6mm).


4 WIRE RAGE : 0,5 - 1,5 mm2.

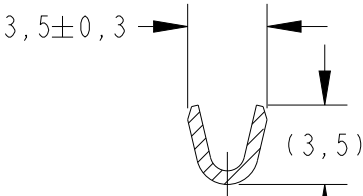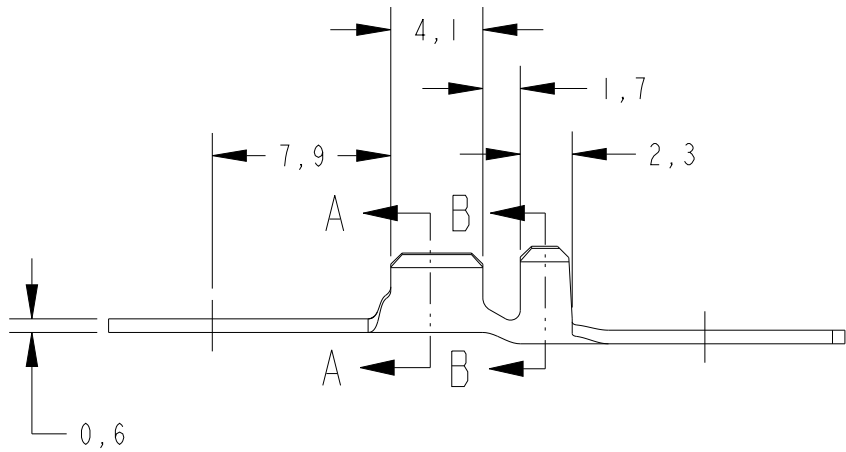


SECTION A - A

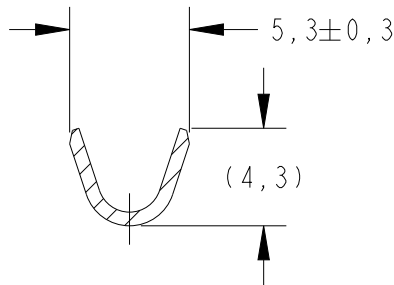

SECTION B - B

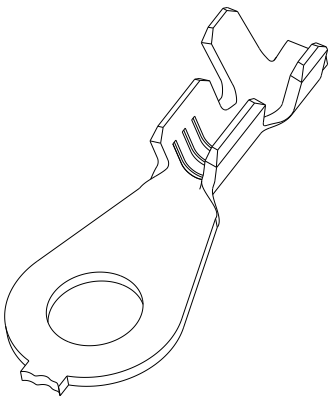

	TIN-PLATED	BRASS	1 626028-4
OBSOLETE		PH. BRONZE	626028-3
OBSOLETE	TIN-PLATED	BRASS	626028-2
OBSOLETE		BRASS	626028-1
	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.C.CANTERI 30JUN2016	 TE Connectivity			
		CHK W.L.STEFANI 30JUN2016				
DIMENSIONS: mm		APVD -	RING TONG			
		PRODUCT SPEC -				
		APPLICATION SPEC -				
MATERIAL SEE TABLE		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO C-626028	RESTRICTED TO -
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CUSTOMER DRAWING				
0 PLC ± 1 PLC ±0,4 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±1°		SCALE 3:1				
FINISH SEE TABLE		SHEET 1 OF 1				
		REV M				