


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	REVISED PER ECR-24-213591	28JUN2024	RK	FJS

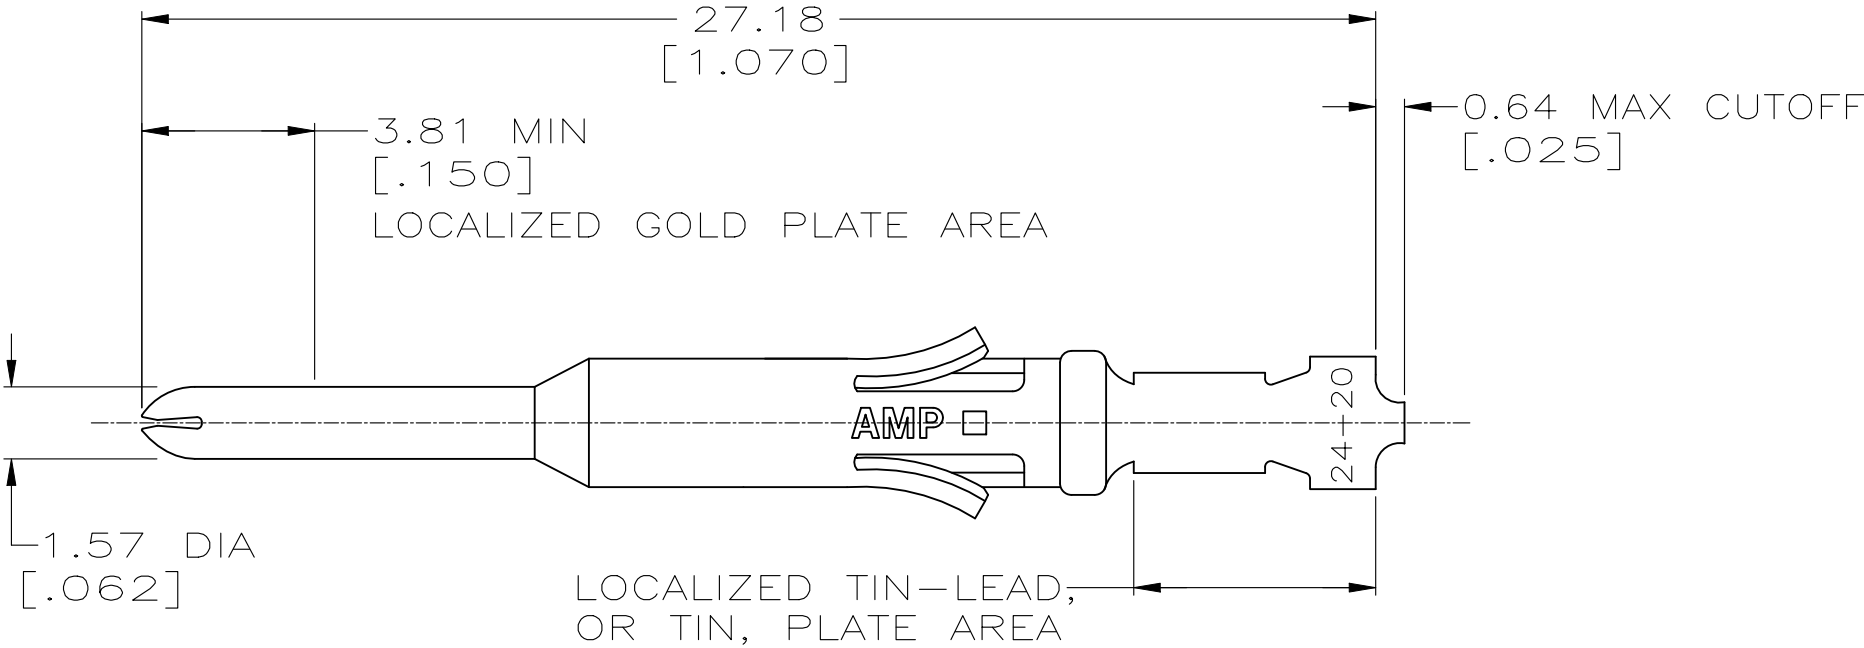

1. WIRE RANGE 24-20 AWG.
2. INSULATION RANGE 1.02-2.03 [.040-.080] DIA.
3. 0.76 μ m [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27 μ m [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA, BOTH OVER 1.27 μ m [.000050] MIN NICKEL.
4. TIN PLATED.
5. GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727 AND NICKEL PER QQ-N-290.
6. 0.76 μ m [.000030] MIN PRECIOUS METAL PLATE IN LOCALIZED GOLD PLATE AREA, 1.27 μ m [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27 μ m [.000050] MIN NICKEL. CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPEC 108-10042, BASED ON EIA-364-1000.01 (CONTROLLED ENVIRONMENT APPLICATIONS).

1-66583-0	6	66593-4
66583-4	3	66593-2
66583-2	4	66593-1
STRIP REF	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 06/15/94	TE Connectivity			
		CHK R.STONE 06/22/94				
		APVD G.STEINHAUER 06/27/03	NAME			
		PRODUCT SPEC	CONTACT, PIN, LOOSE PIECE, TYPE VI, MULTIMATE			
		APPLICATION SPEC				
		WEIGHT	SIZE A3	CAGE CODE 00779	DRAWING NO C-66593	RESTRICTED TO -
		CUSTOMER DRAWING	SCALE 6:1		SHEET 1 OF 1	REV G