


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		W	REVISED PER ECO-12-012316	05JUL12	KH	MZ

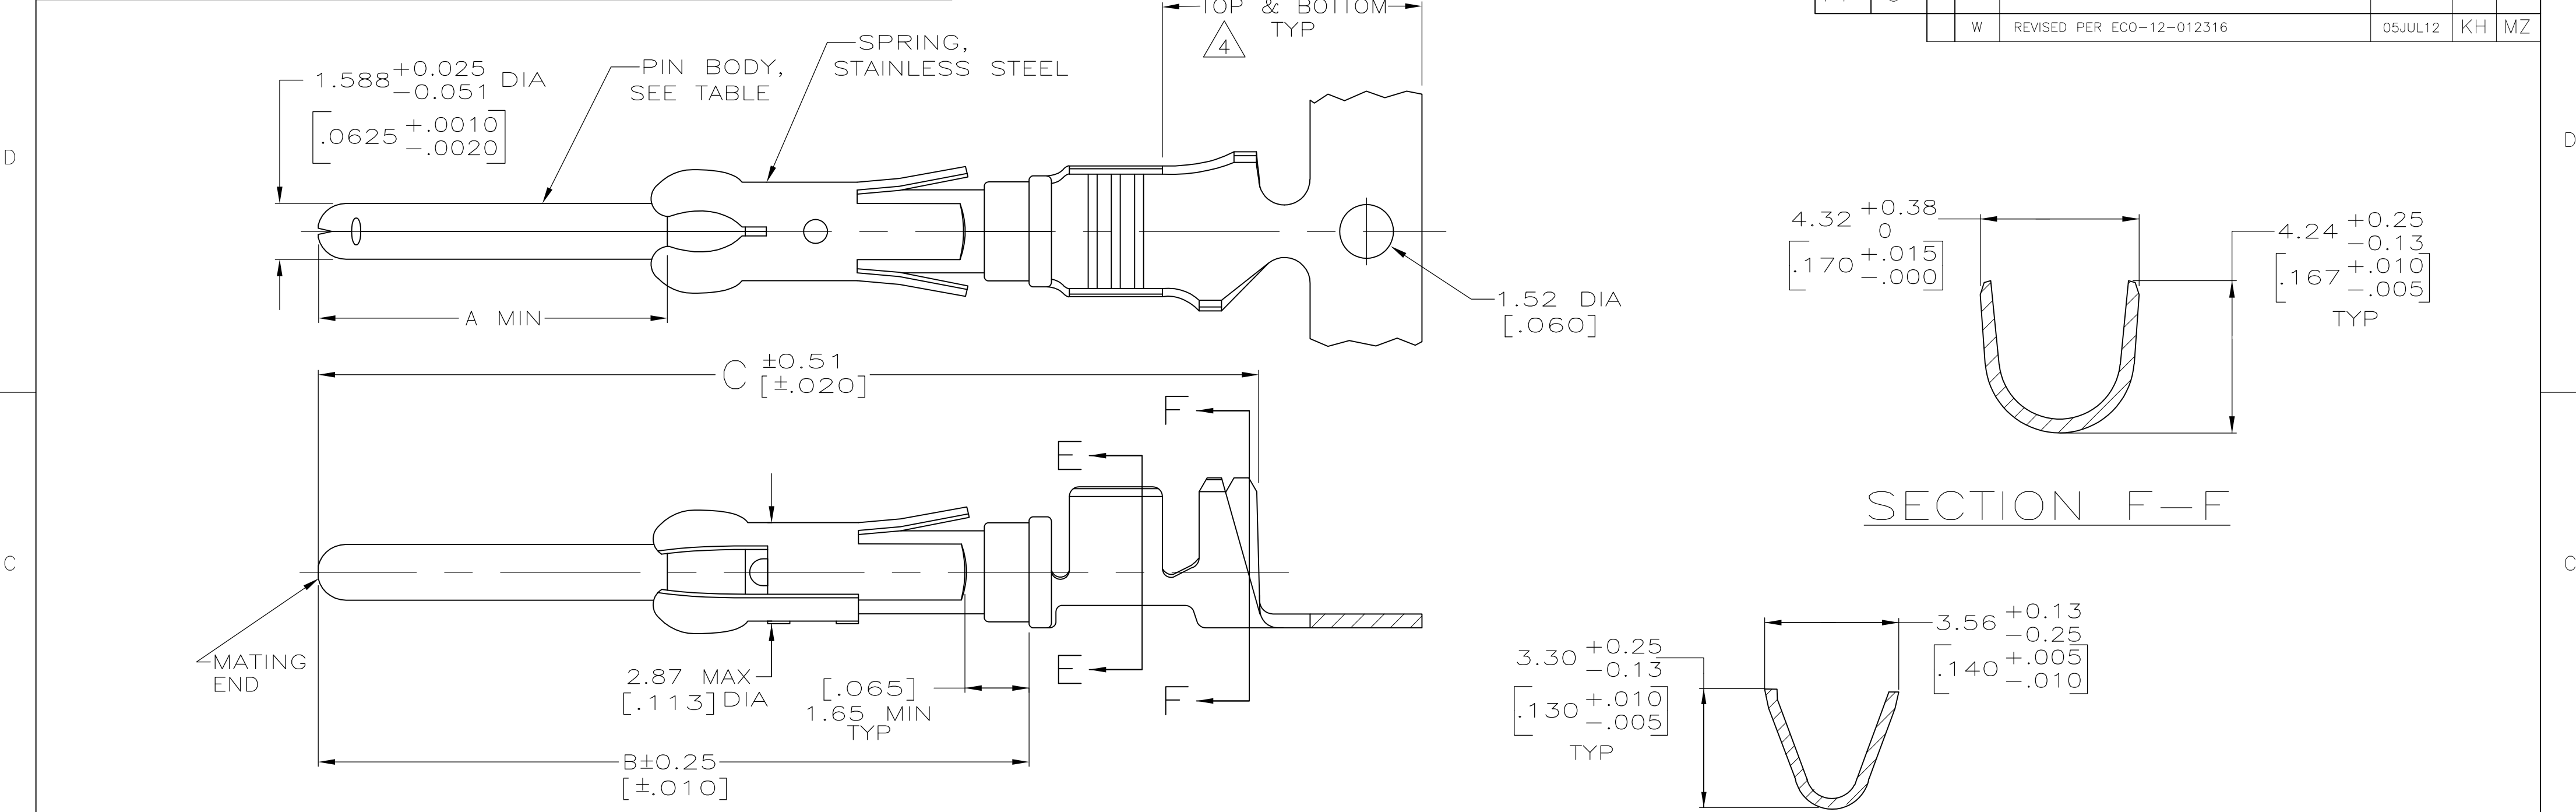

- 1

REELED FOR MINI-APPLICATOR.
- 2

0.76 μ m [.000030] MIN PRECIOUS METAL PLATE ON MATING END FOR A LENGTH OF 5.08 [.200] MIN OVER 1.27 μ m [.000050] MIN NICKEL PLATE. GOLD FLASH ALL OVER. CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042, BASED ON EIA/ECA-364-1000.01A (CONTROLLED ENVIRONMENT APPLICATIONS).
- 3

1.27 μ m [.000050] MIN TIN-LEAD PER MIL-T-10727 OVER 1.27 μ m [.000050] MIN NICKEL PER QQ-N-290.
- 4

GOLD PLATING NEED NOT APPEAR IN THIS AREA.
- 5

BRASS
- 6

PHOSPHOR BRONZE
- 7

WIRE RANGE 14-18 AWG.
- 8

INSULATION RANGE 2.79[.110]-3.81[.150] DIA.
- 9

0.38 μ m [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN, 1.27 μ m [.000050] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 5.69 [.224] MIN ON OPPOSITE END,BOTH OVER 1.27 μ m [.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.
- 10

OBSOLETE PART NUMBER.
- 11

1.27 μ m [.000050] MIN TIN PER MIL-T-10727 OVER 1.27 μ m [.000050] MIN NICKEL PER Q-N-290.
- 12

COPPER NICKEL ALLOY.
- 13

0.38 μ m [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN. WITH GOLD FLASH ON THE REMAINDER, OVER 1.27 μ m [.000050] MIN NICKEL PER QQ-N-290.
- 14

PRELIMINARY - NOT FOR PRODUCTION.

- 15

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 16

0.76 μ m [.000030] MIN PRECIOUS METAL PLATE ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH 1.27 μ m [.000050] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 1.27 μ m [.000050] MIN NICKEL PLATE. CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042, BASED ON EIA/ECA-364-1000.01A (CONTROLLED ENVIRONMENT APPLICATIONS).

15	OBSOLETE	26.75[1.053]	20.24[.797]	9.91[.390]	1	13	12	—	14	1-66597-2
		26.75[1.053]	20.24[.797]	9.91[.390]	1	11	12	1-66602-0		1-66597-1
		26.75[1.053]	20.24[.797]	9.91[.390]	1	2	12	66602-9		1-66597-0
		26.75[1.053]	20.24[.797]	9.91[.390]	1	11	6	—		66597-9
		26.75[1.053]	20.24[.797]	9.91[.390]	1	11	5	66602-8		66597-8
	OBSOLETE	26.75[1.053]	20.24[.797]	9.91[.390]	1	9	5	66602-5		66597-7
	OBSOLETE	30.43[1.198]	23.93[.942]	13.59[.535]	1	3	5	—		66597-6
	OBSOLETE	26.75[1.053]	20.24[.797]	9.91[.390]	1	2	6	66602-4		66597-5
	OBSOLETE	26.75[1.053]	20.24[.797]	9.91[.390]	1	3	6	66602-3		66597-4
		26.75[1.053]	20.24[.797]	9.91[.390]	1	16	5	66602-2		66597-2
	26.75[1.053]	20.24[.797]	9.91[.390]	1	3	5	66602-1		66597-1	
		C	B	A	REELING	PIN BODY FINISH	PIN BODY	LOOSE PIECE REF		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	7-22-91		TE Connectivity				
				CHK	8-15-91						
				APVD	8-19-91		NAME				
				PRODUCT SPEC		PIN ASSEMBLY, .062, TYPE III+					
				APPLICATION SPEC							
				WEIGHT		SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO	
				-		A2	00779	C=66597		-	
				CUSTOMER DRAWING				SCALE	SHEET		REV
								8:1	1 of 1		W