


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECR-24-207629	16MAY2024	SA	DSC

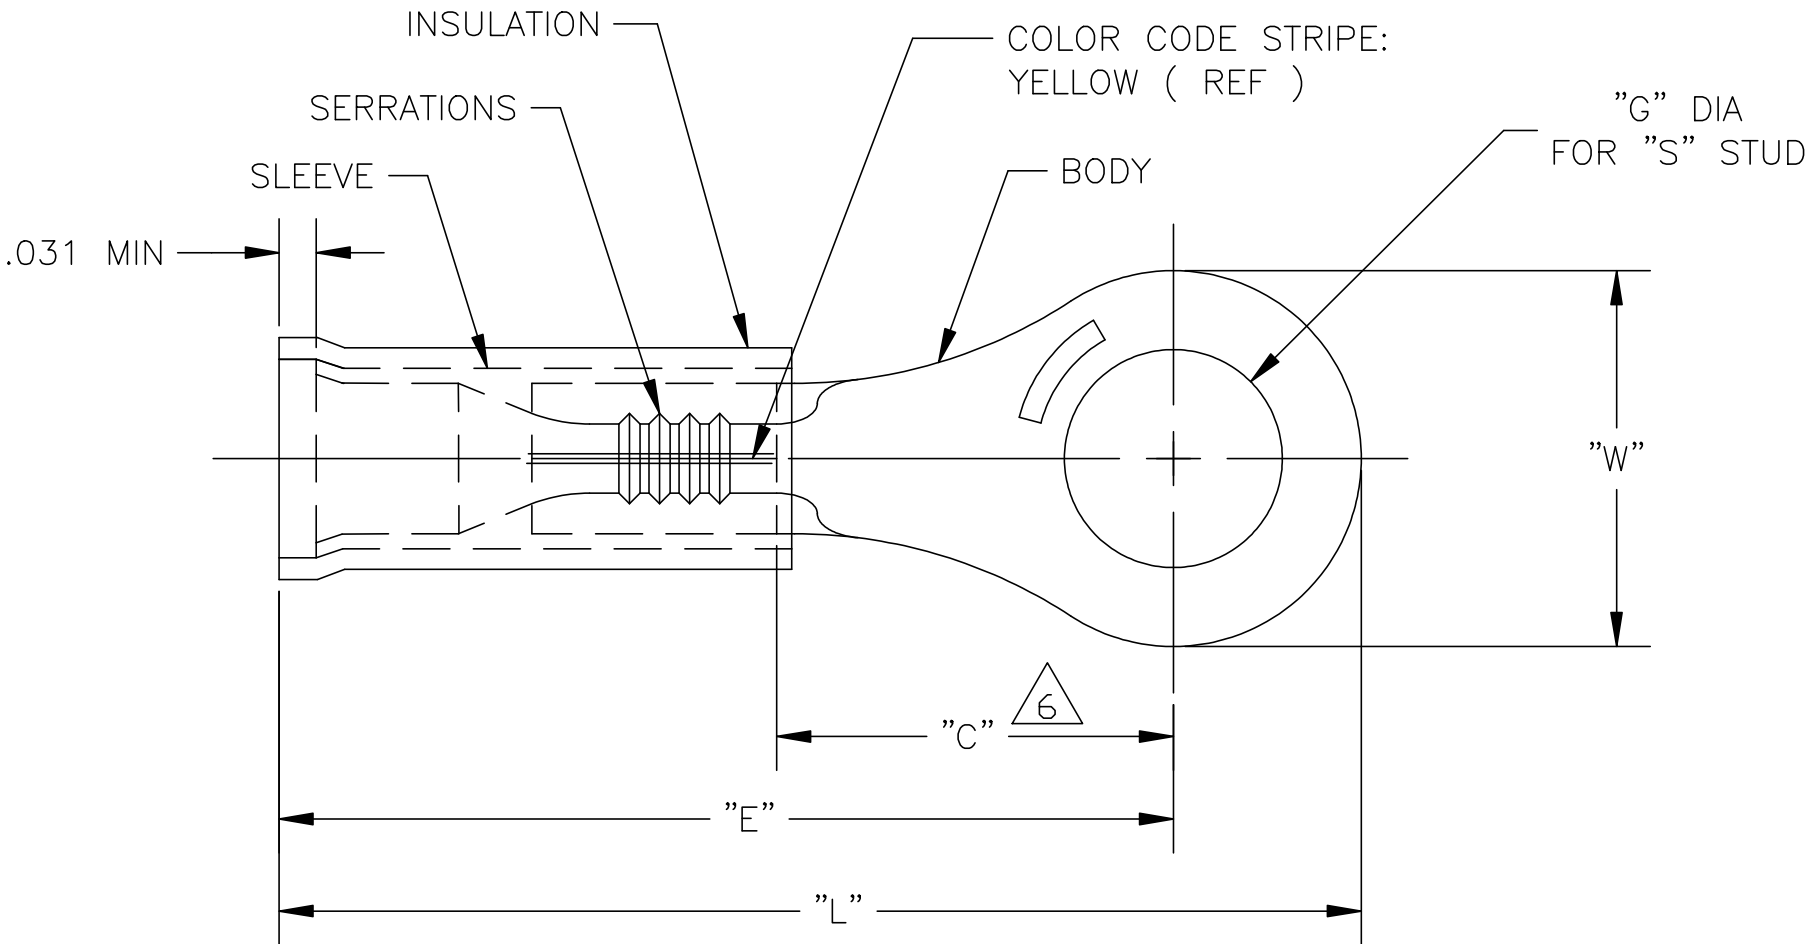

1 MUST BE CRIMPED WITH A 22-18 OR 22-16 P.I.D.G. (RED) TOOL.

2 WIRE INSULATION DIA .032-.082

3 TONGUE MATERIAL THK: .027±.002

4 BODY & SLEEVE: TIN PLATE PER ASTM B545.


5 MATERIAL: BODY & SLEEVE: CU PER ASTM B152 INSULATION: PVF2, COLOR - NATURAL

6 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.

7 150°C MAX OPERATING TEMP

8 CMA RANGE IS 202-509

"W"	"C"	"E"	"G"	"S"	"L"	QTY	PACKAGE TYPE	PART NO.
.203	.211 MIN	.632 MAX	.093±.003	#2	.741 MAX	1000	LOOSE PIECE	696420-1
.203	.211 MIN	.632 MAX	.119±.003	#4	.741 MAX	1000	LOOSE PIECE	696420-2
.250	.243 MIN	.664 MAX	.145±.003	#6	.797 MAX	1000	LOOSE PIECE	696420-3
.281	.250 MIN	.671 MAX	.171±.003	#8	.819 MAX	1000	LOOSE PIECE	696420-5
.312	.281 MIN	.702 MAX	.197±.003	#10	.866 MAX	1000	LOOSE PIECE	696420-6

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 29JUN05		 TE Connectivity							
		CHK T MICHELUTTI 29JUN05									
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME TERMINAL, PVF2, RING TONGUE, PIDG, WIRE SIZE: 26-24 AWG —							
		0 PLC ± —									
		1 PLC ± —									
		2 PLC ± —									
		3 PLC ± —		SIZE A3							
		4 PLC ± —									
MATERIAL 		FINISH 		CAGE CODE 00779		DRAWING NO C-696420		RESTRICTED TO —			
				APVD T MICHELUTTI 29JUN05		CUSTOMER DRAWING					
				PRODUCT SPEC —							
				APPLICATION SPEC —		SCALE 8:1		SHEET 1 OF 1		REV B	
				WEIGHT —							