


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECR-24-207629	16MAY2024	SA	DSC

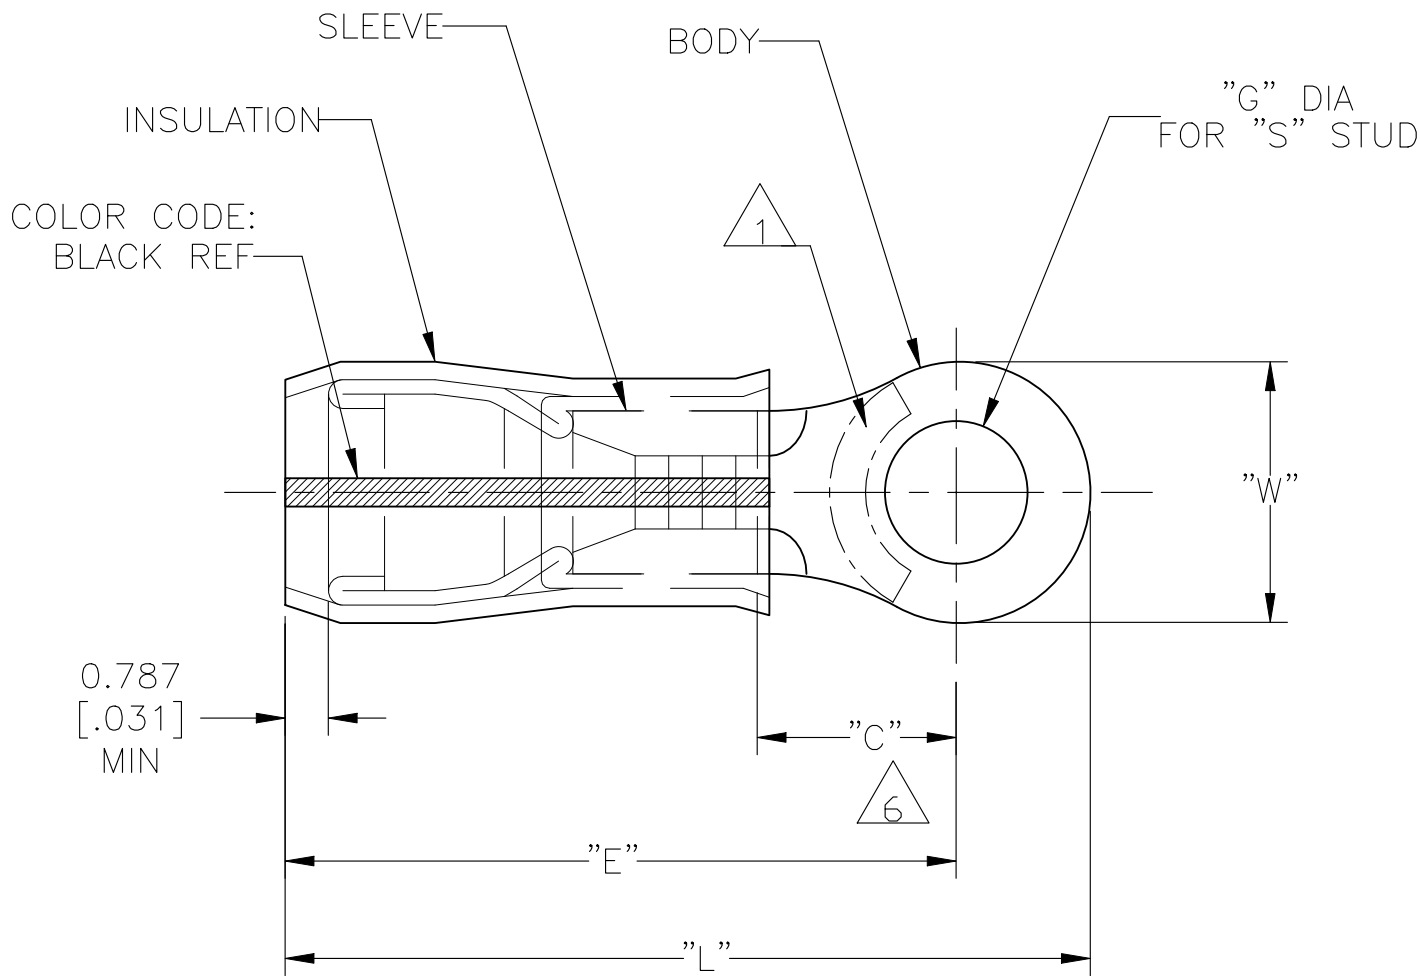

- 1 STAMP AMP 16-14HD, APPROX AS SHOWN
- 2 WIRE INSULATION DIA: 3.810-5.842[.150-.230]
- 3 BODY MATERIAL THK: 1.219±0.051[.048±.002]
- 4 BODY & SLEEVE: TIN PLATE PER ASTM B545, INSULATION: COLOR-NATURAL
- 5 BODY & SLEEVE: CU PER ASTM B152 INSULATION: PVF2
- 6 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.

8.712[.343]	7.137[.281] MIN	22.276[.877] MAX	4.343±0.076[.171±.003]	M4[#8]	26.695[1.051] MAX	500	LOOSE PIECE	696430-5
"W"	"C"	"E"	"G" DIA	"S"	"L"	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
150°C[302°F] MAX

VOLTAGE RATING:
-

CIRCULAR MIL AREA:
1.04-2.62mm²[2,050-5,180]
STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± 0.127[.005]
4 PLC ± -
ANGLES ± -
FINISH

MATERIAL

5

DWN
JR RUTH
CHK
T MICHIELUTTI
APVD
T MICHIELUTTI
PRODUCT SPEC
APPLICATION SPEC
114-2157
WEIGHT
-

01NOV05
01NOV05
01NOV05

NAME
TERMINAL, RING TONGUE,
PVF2 , P.I.D.G.
WIRE SIZE: 16-14 AWG HD

SIZE
A3
CAGE CODE
00779
DRAWING NO
C-696430

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
4:1

SHEET
1 OF 1

REV
B