



SECTION A - A

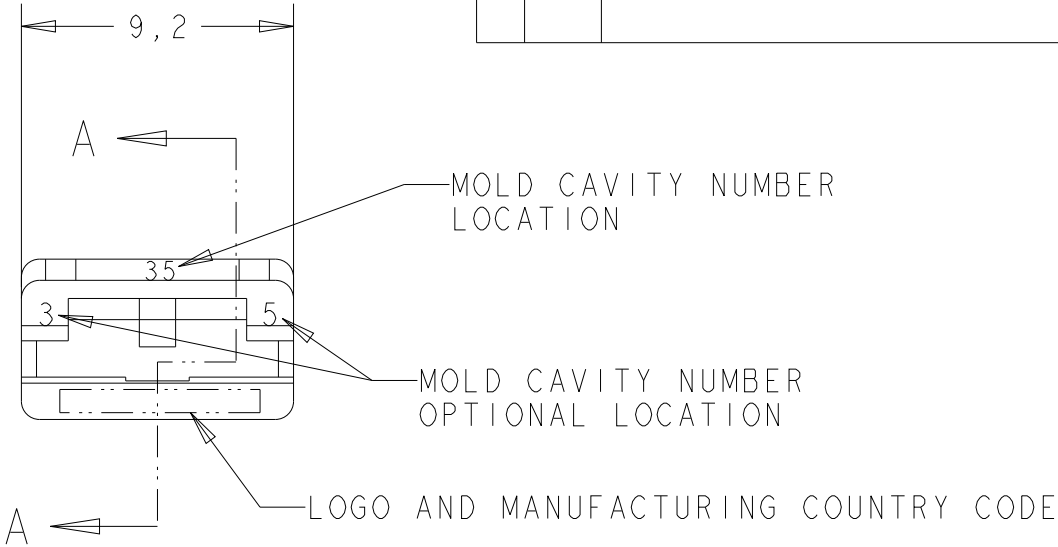

- 1
- 2
- 3
- 4
- ACCORDING TO SPEC. IEC 60335-1 GWT 750°C WITHOUT FLAME.
- THERMO STABILIZED RAW MATERIAL.
- PACKAGING QUANTITY: 15000 PIECES IN A BOX.
- OBSOLETE.

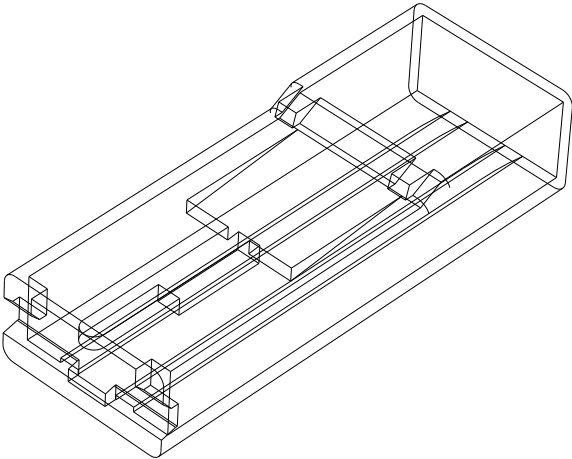

2-2133346-0	—NEGRO/BLACK—	POLYAMIDE 6/6 - UL94 V2	2 8-735075-5
-	NATURAL/CLEAR	POLYAMIDE 6/6 - UL94 V0	1 8-735075-0
-	NATURAL/CLEAR	POLYAMIDE 6/6 - UL94 V0	6-735075-0
-	NATURAL/CLEAR	POLYAMIDE 6/6 - UL94 V0	2 735075-6 3
1-2133346-4	—NEGRO/BLACK—	POLYAMIDE 6/6 - UL94 V2	1 735075-5 4
1-2133346-3	—AMARELO/YELLOW—		1 735075-4 4
1-2133346-2	—AZUL/BLUE—		1 735075-3 4
1-2133346-1	—VERMELHO/RED—		1 735075-1 4
1-2133346-0	—NATURAL/CLEAR—		1 735075-0 4
-	NEGRO/BLACK	POLYPROPYLENE	735075-5
-	NATURAL/CLEAR		735075-0
REPLACED BY		COLOR	MATERIAL
			PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

H.CANTERI

06DEC2012

CHK

W.L.STEFANI

07DEC2012

APVD

-

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

±

±

±

±

±

±1°

0,3

MATERIAL

SEE TABLE

FINISH

SEE TABLE

PRODUCT SPEC

108-22033

APPLICATION SPEC

-

WEIGHT

-

Customer Drawing

NAME

POST INSULATION FASTON

6,35 mm. HSG.

-

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

735075

-

SCALE

4:1

SHEET

1

OF

1

REV

V11