





REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

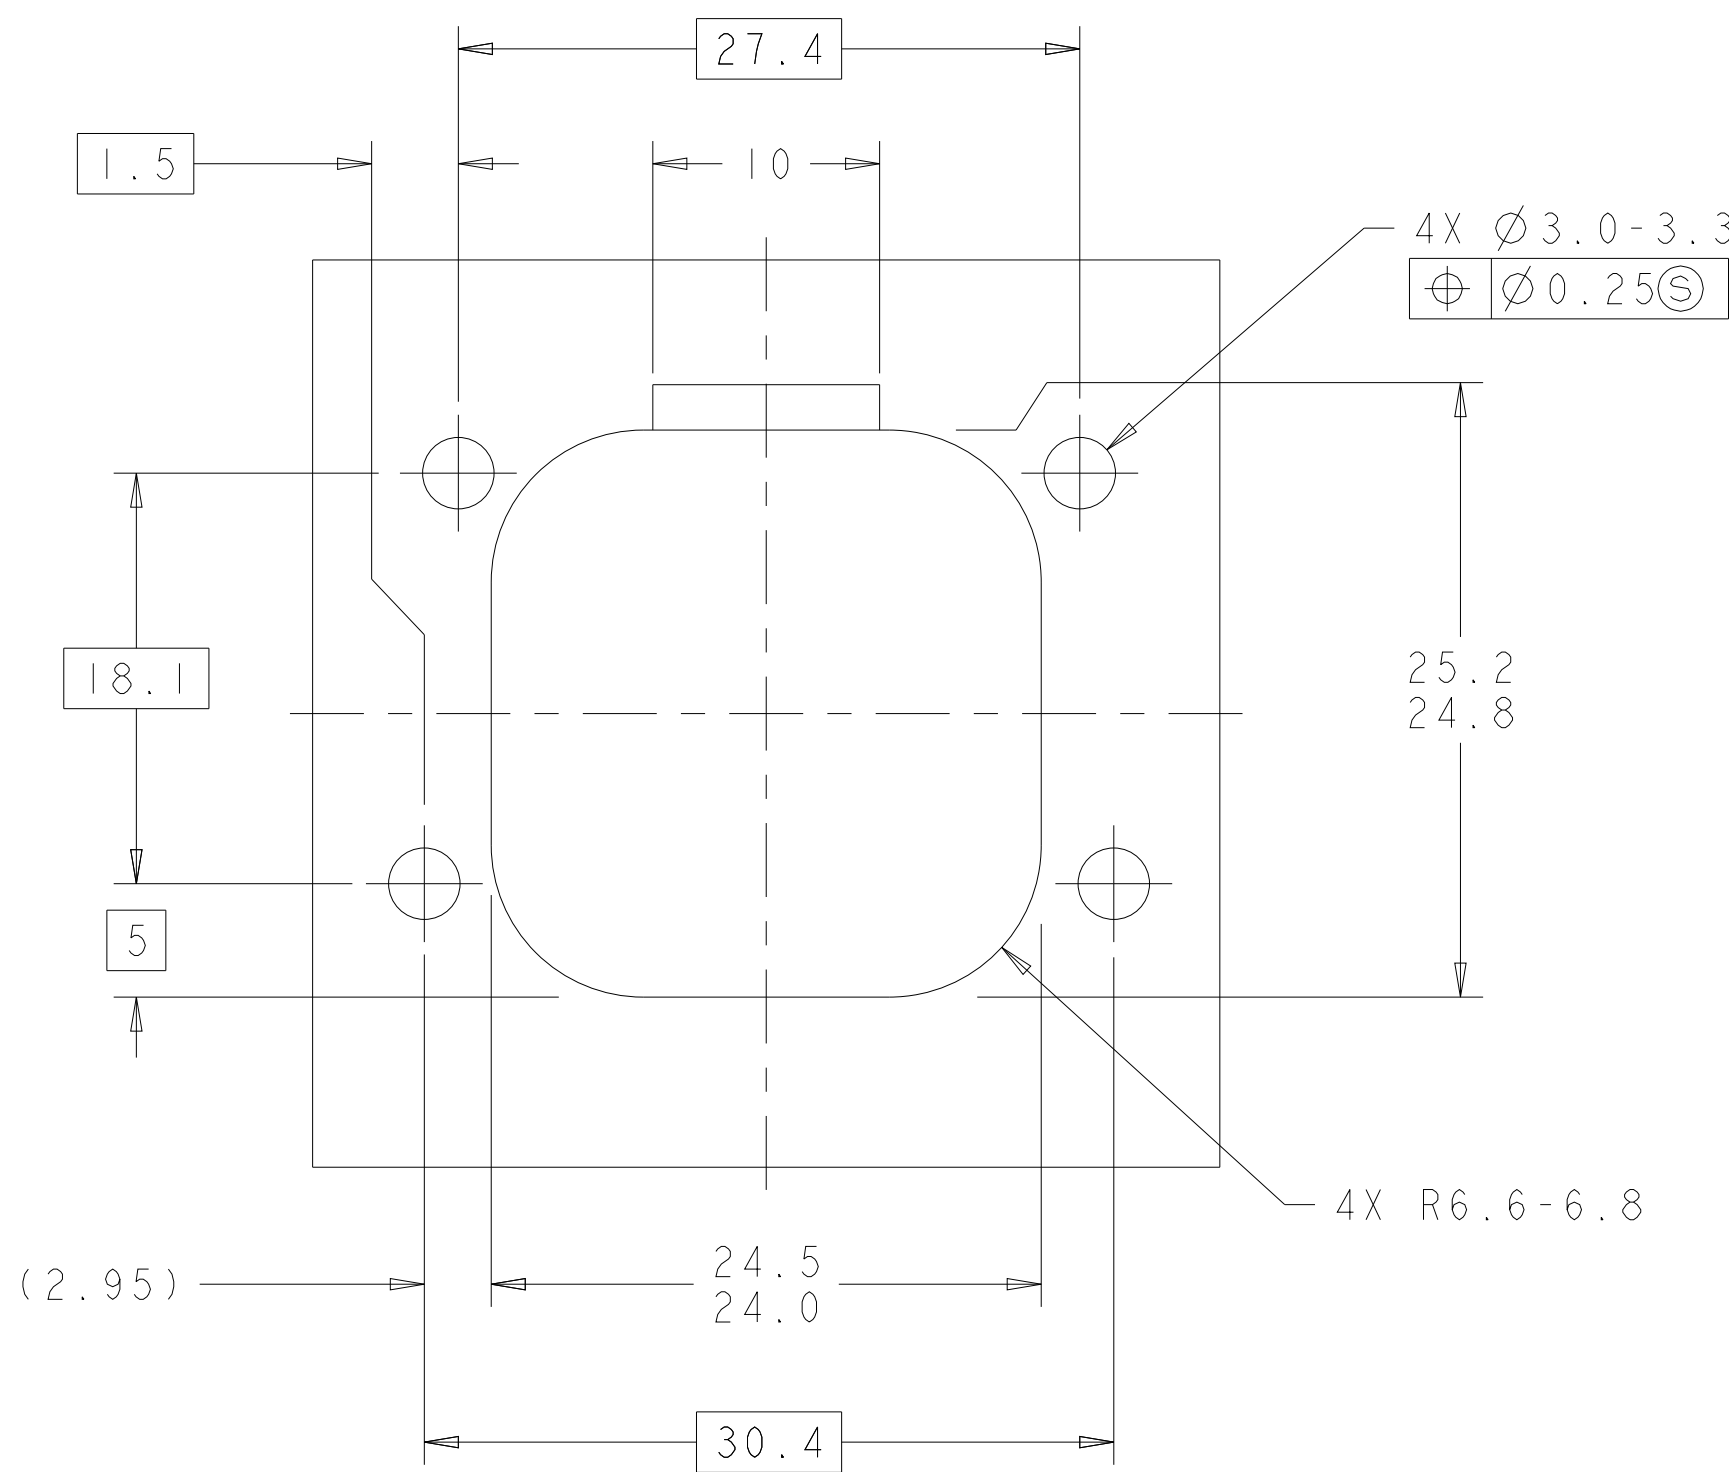


RECOMMENDED MOUNTING HOLE LAYOUT  
FOR 5.0 MAX THICK PANEL

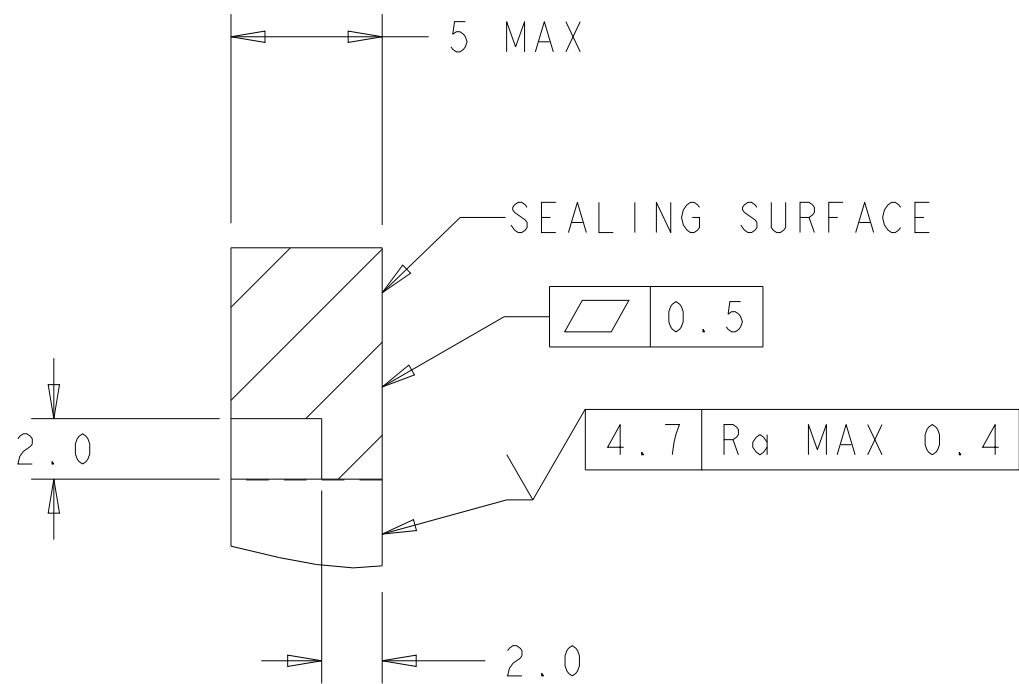




SECTION A-A  
OPTIONAL CONSTRUCTION IF PANEL  
THICKNESS IS GREATER THAN 2.0

SCALE 4:1

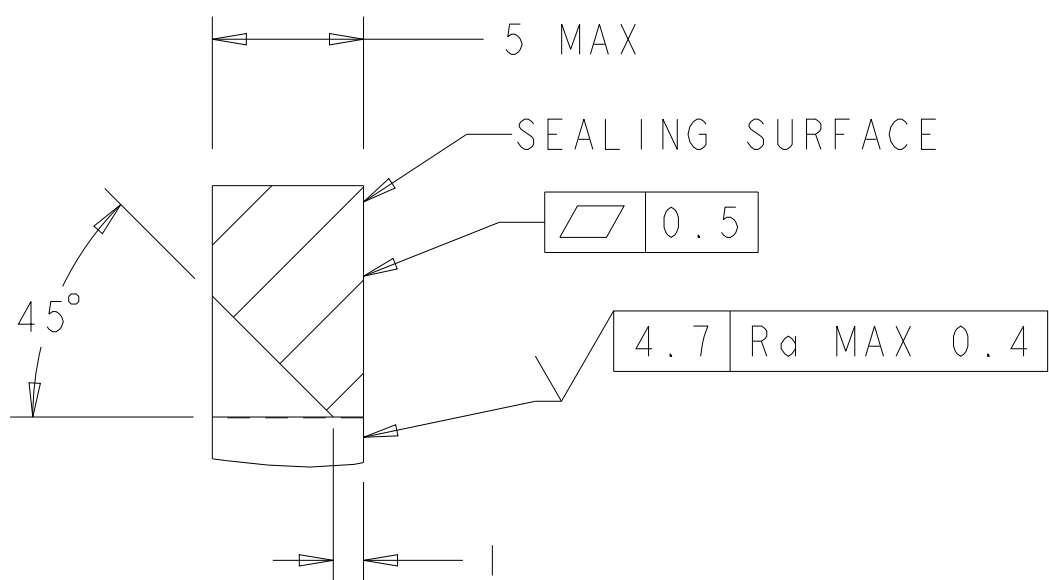


SECTION A-A  
OPTIONAL CONSTRUCTION IF PANEL  
THICKNESS IS GREATER THAN 2.0


SCALE 4:1

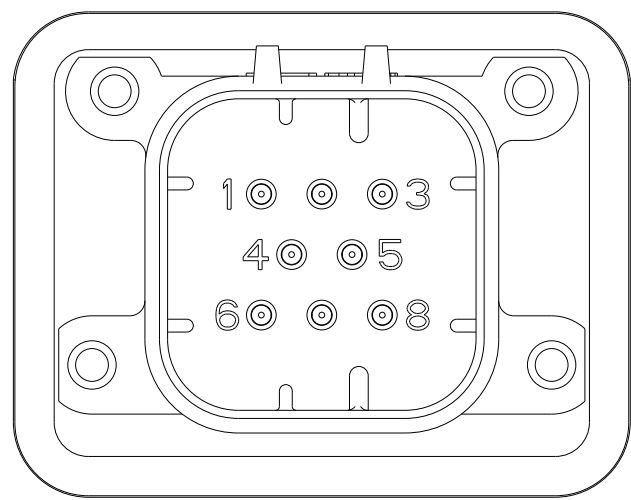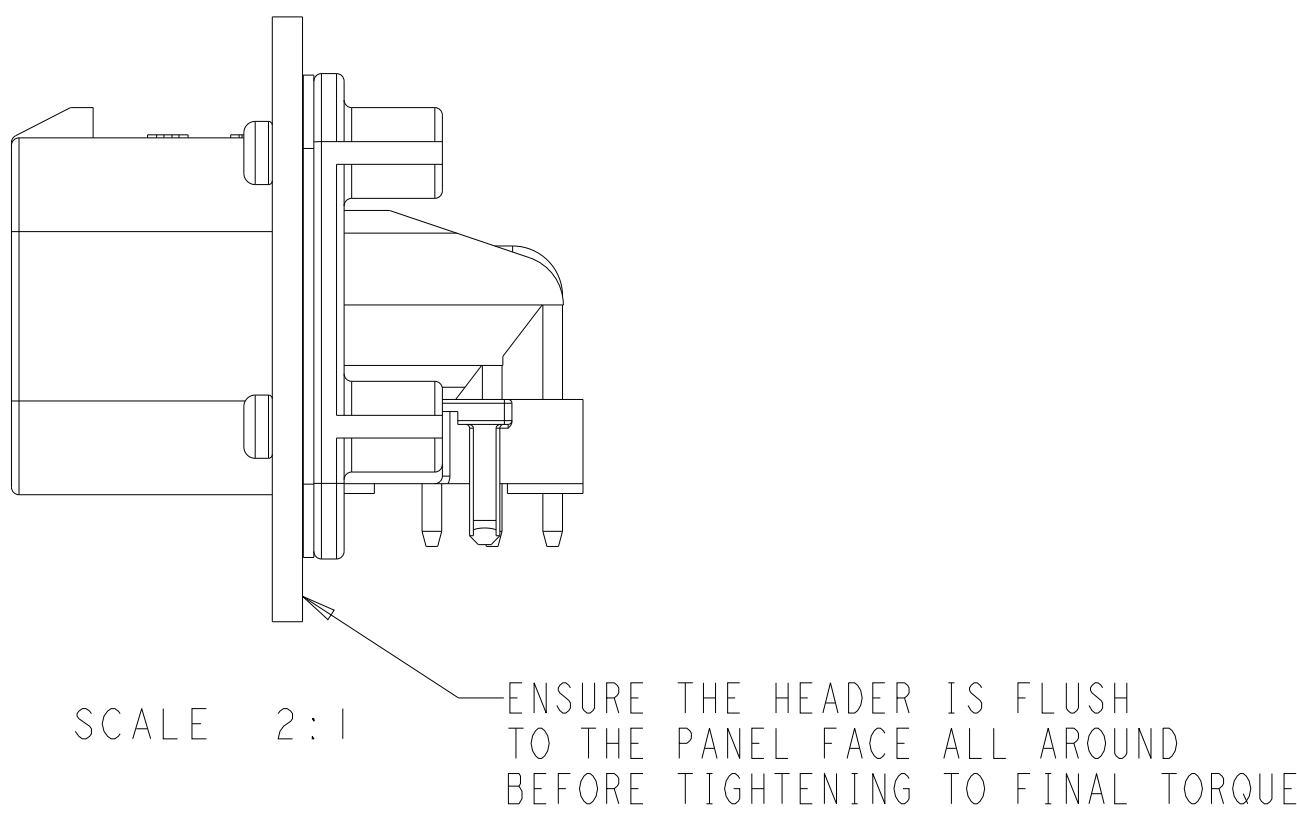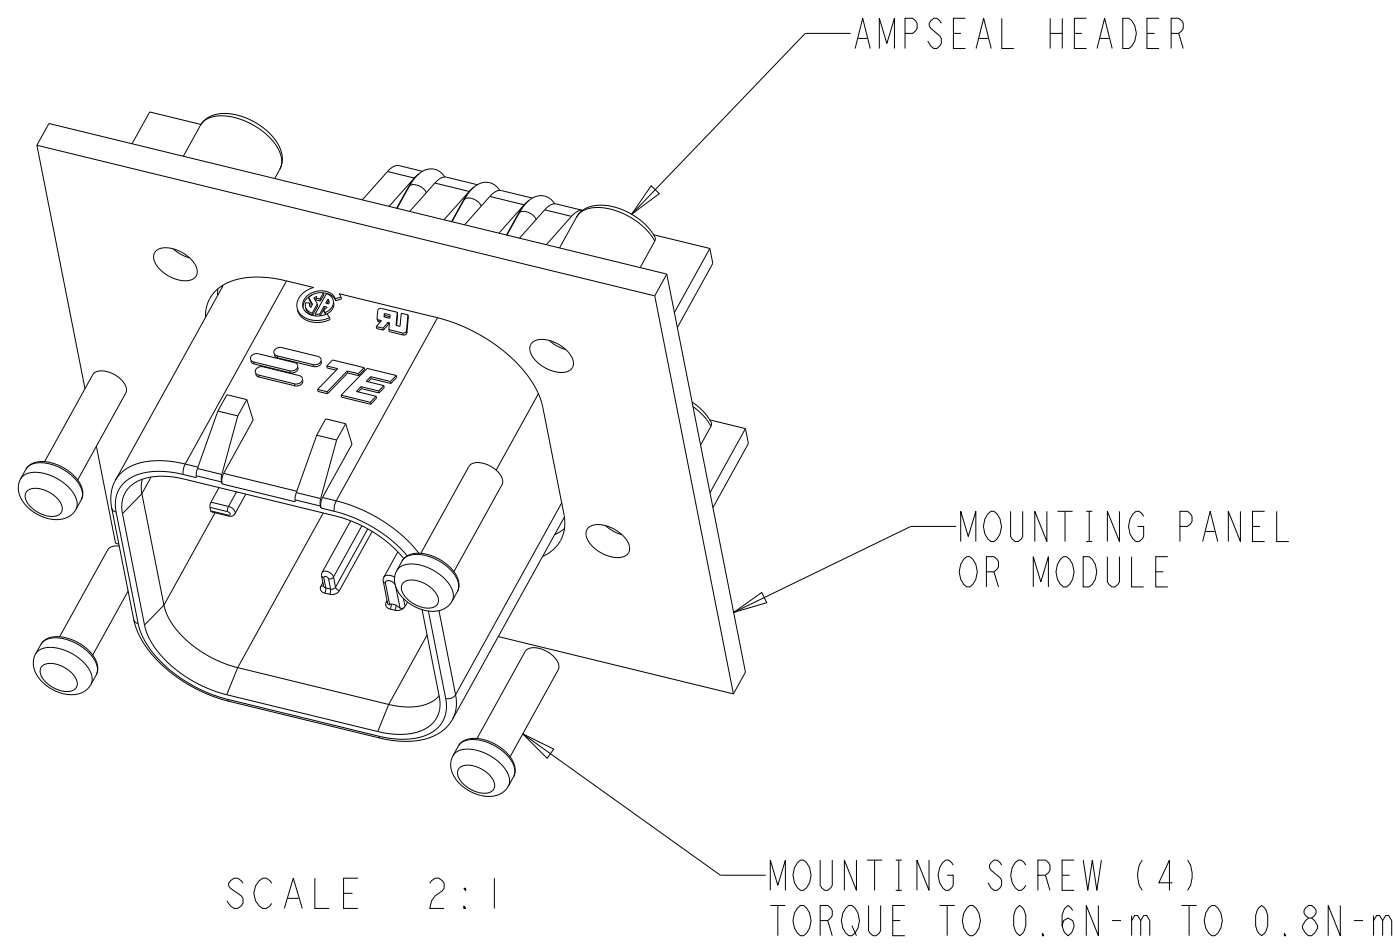



776280-1 & 1-776280-1  
KEY LOCATION  
SCALE 2:1

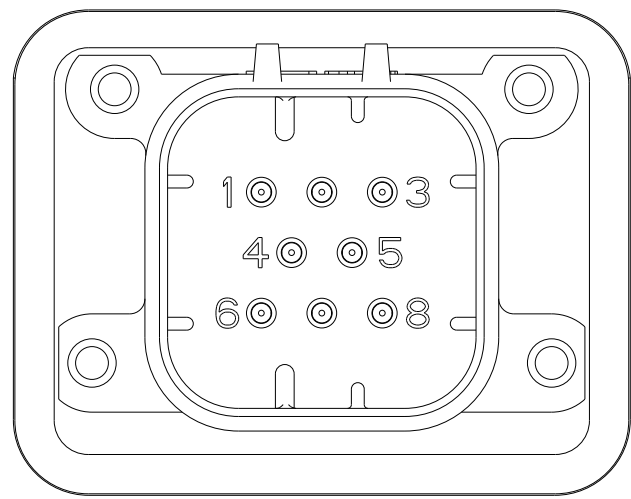

776280-2 & 1-776280-2  
KEY LOCATION  
SCALE 2:1

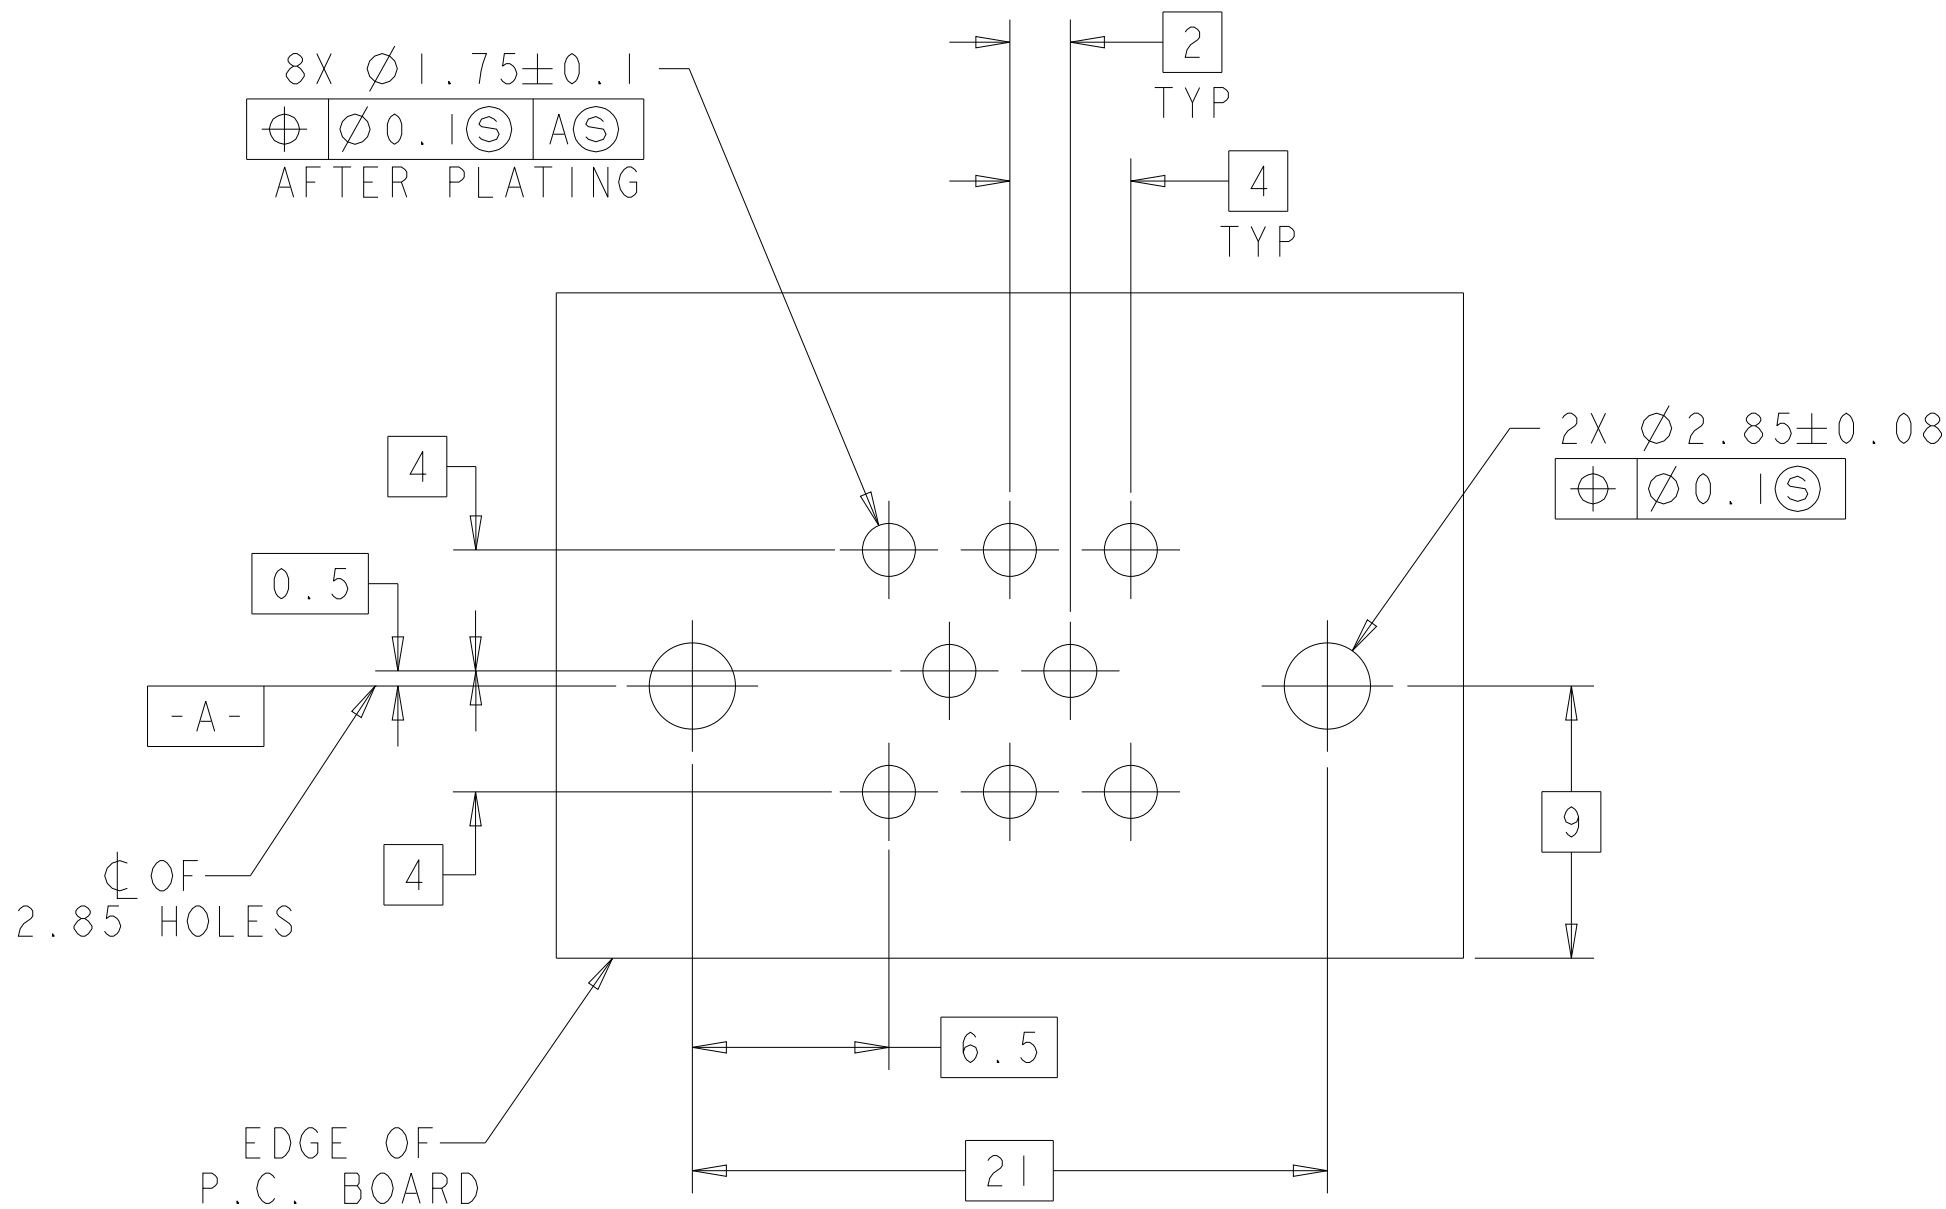

RECOMMENDED P.C. BOARD LAYOUT  
FOR 1.57 THICK P.C. BOARD

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN CHK J. MARKEY	29FEB08 29FEB08	 TE Connectivity									
DIMENSIONS:		APVD J. MARKEY	29FEB08	NAME HEADER ASSEMBLY, 8 POSITION, RIGHT ANGLE, AMPSEAL	RESTRICTED TO								
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC											
	1 PLOC ±0.2	108-1329											
	2 PLOC ±0.2	APPLICATION SPEC											
	3 PLOC ±0.2	114-16016											
	4 PLOC ±0.2												
MATERIAL	ANGLES ±°	WEIGHT		SIZE	CAGE CODE	DRAWING NO							
	FINISH	15.82g		A1	100779	C=776280							
CUSTOMER DRAWING		SCALE		4:1		SHEET		2 OF 2		REV		G	