

D

C

B

A

D

C

B

A

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
G		REVISED PER ECR-24-226486	20NOV2024	TB	JP





1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 108-11-3.

 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.


 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

 0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.

 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

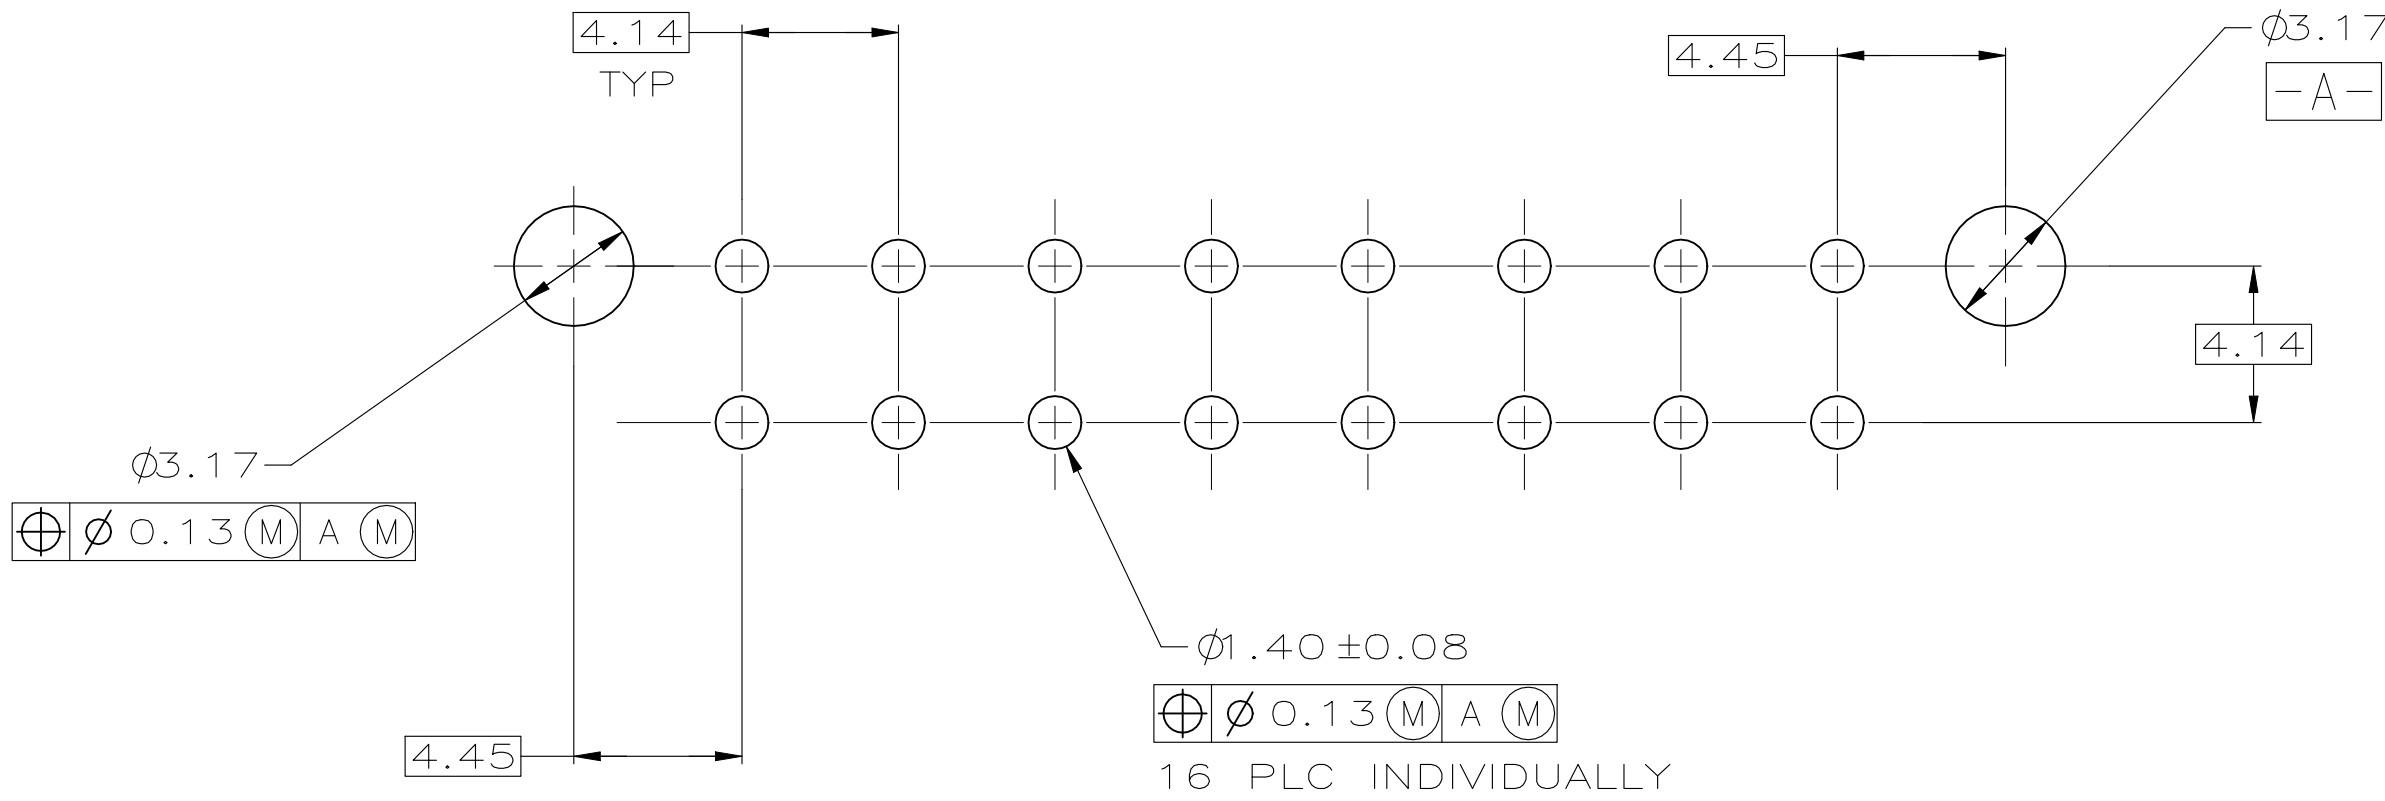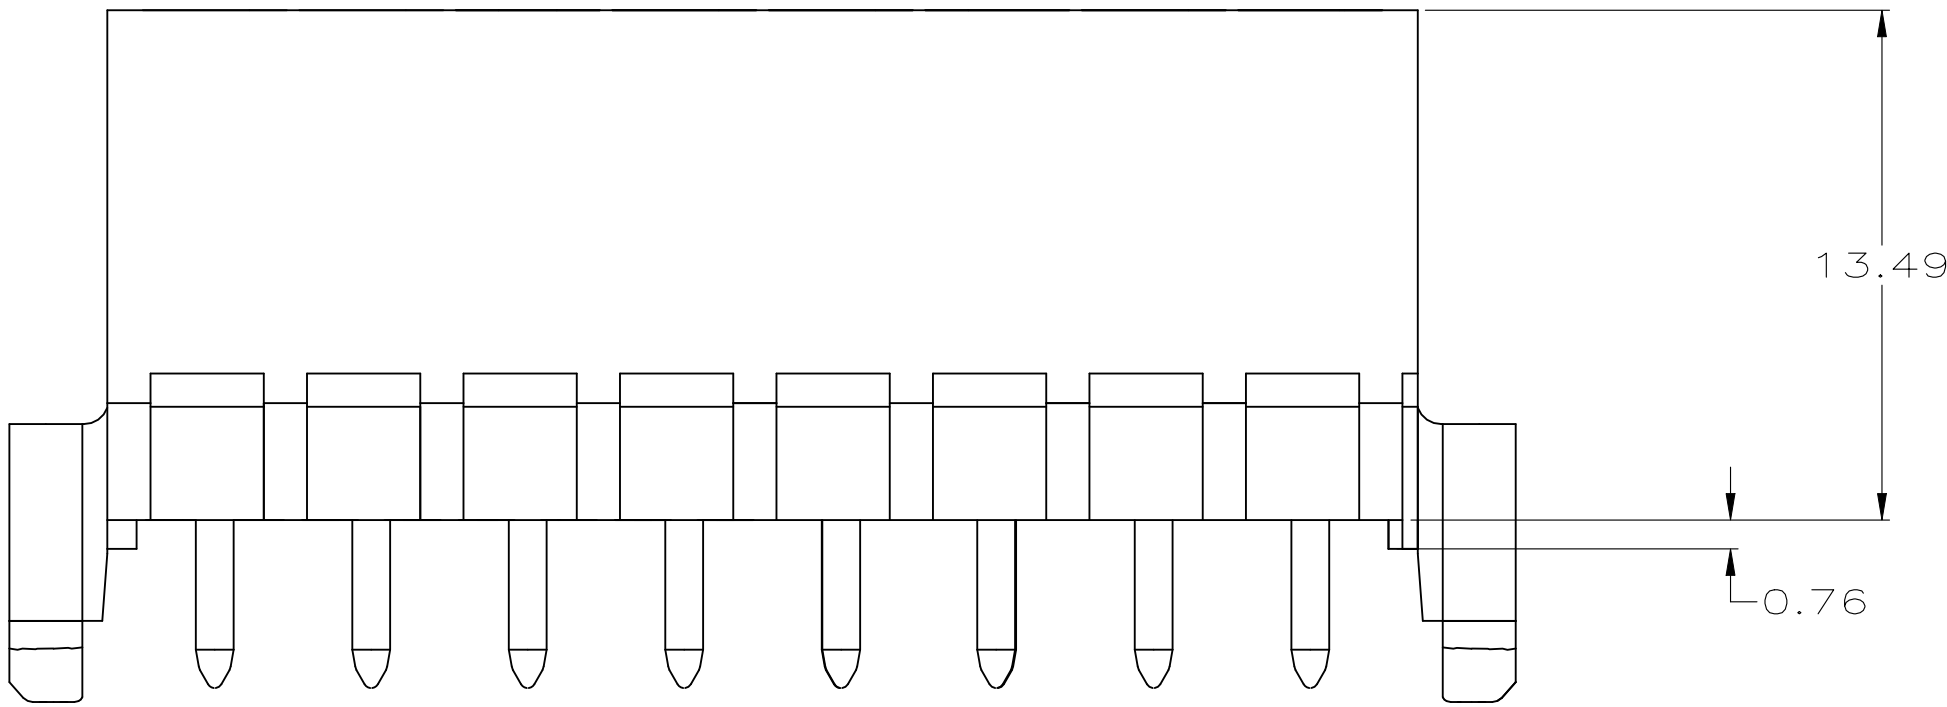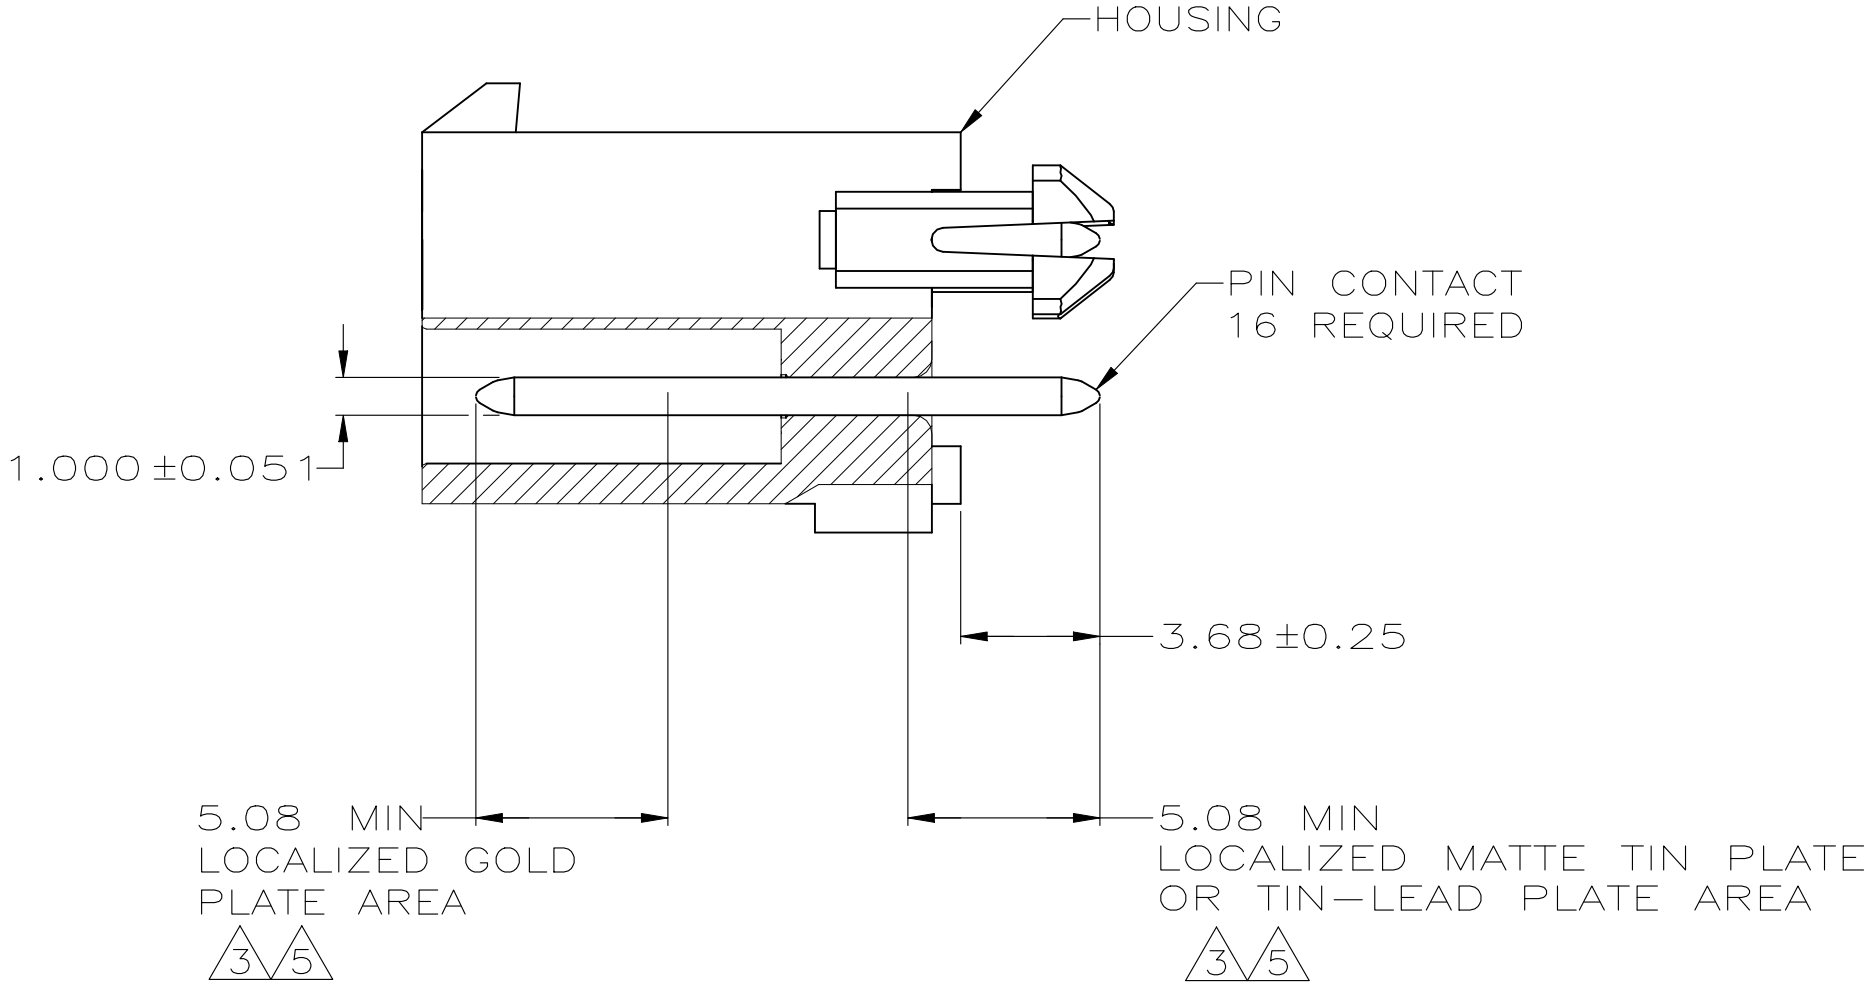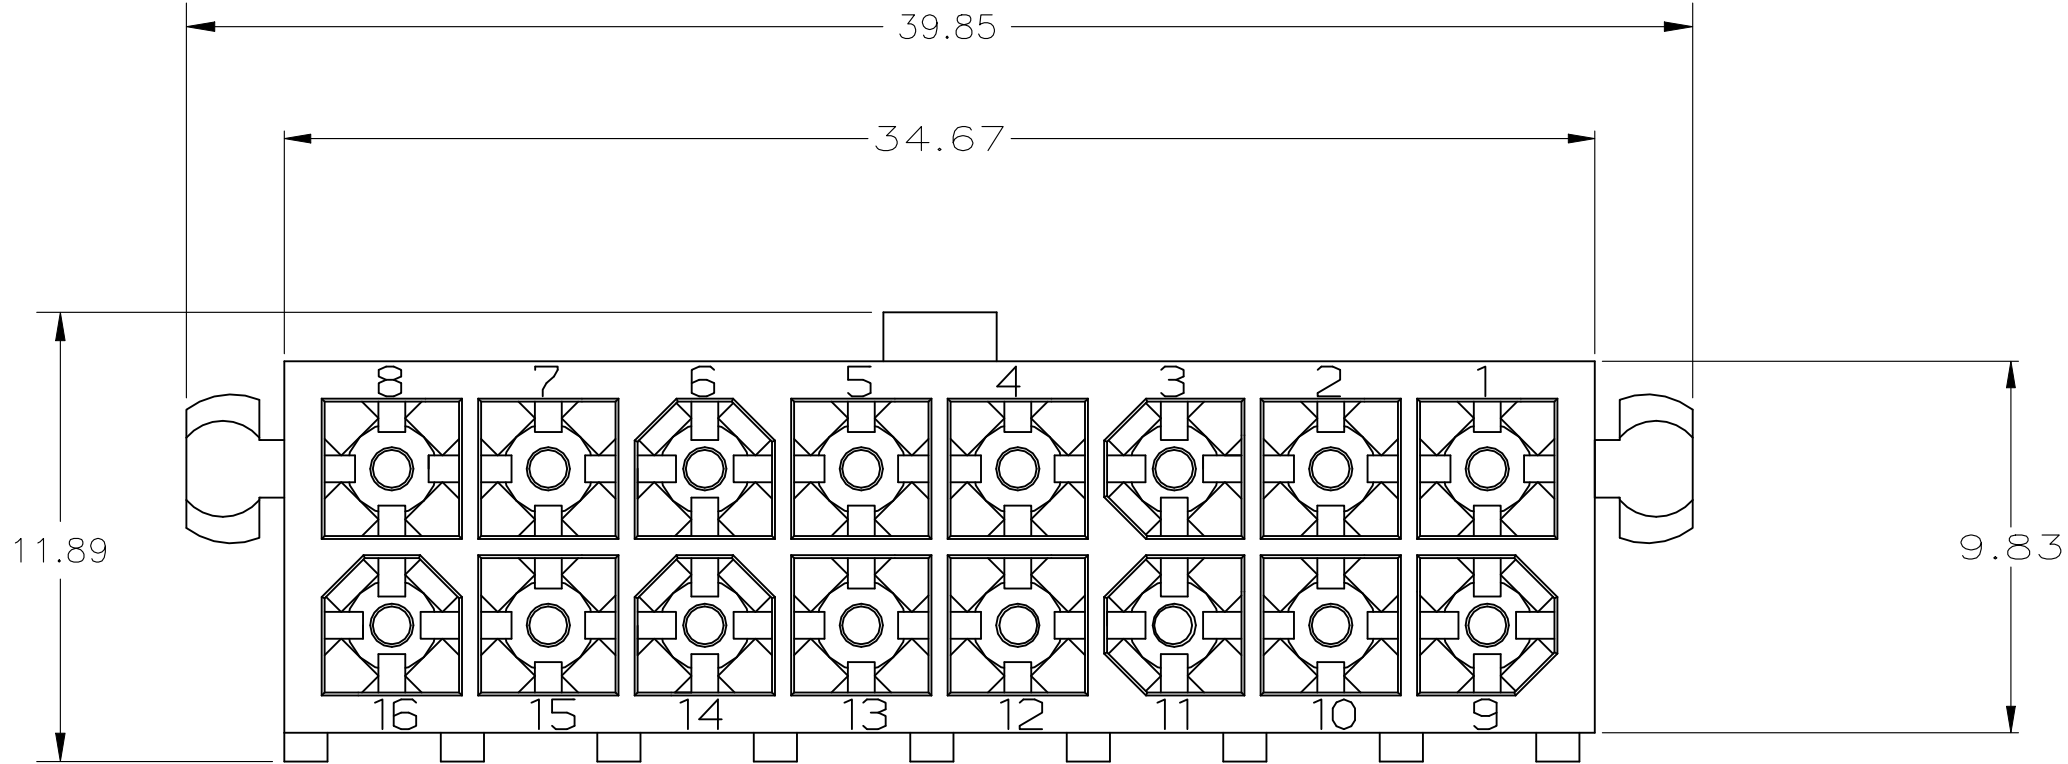

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

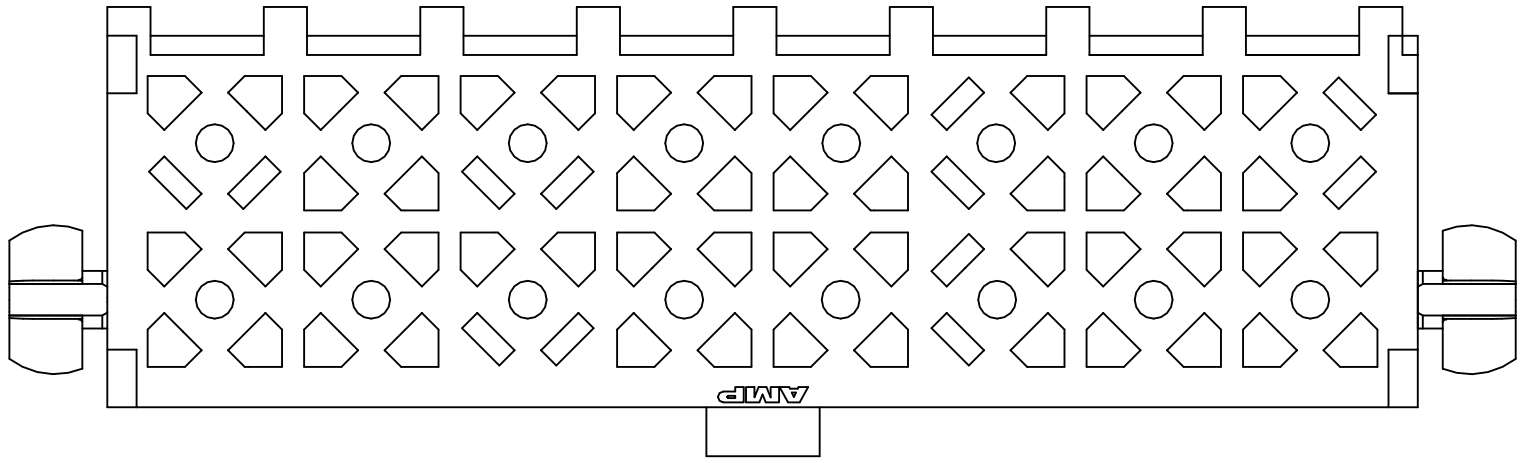

	BRASS, GOLD		NYLON, UL94V-0	WHITE	1-794068-1
	BRASS, TIN		NYLON, UL94V-0	WHITE	1-794068-0
SUPERSEDE WITH 1-794068-1	BRASS, GOLD		NYLON, UL94V-0	WHITE	794068-2
SUPERSEDE WITH 1-794068-0	BRASS, TIN-LEAD		NYLON, UL94V-0	WHITE	794068-1
	MATERIAL	FINISH	MATERIAL	COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S CARPENTER CHK R JONES APVD R JONES PRODUCT SPEC	08JUN05 29JUL2003 29JUL2003	TE Connectivity	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APPLICATION SPEC	NAME	HEADER ASSEMBLY, 16 CKT, DOUBLE ROW VERTICAL, MINI UNIVERSAL MATE-N-LOK	
	0. PLC ± - 1. PLC ± - 2. PLC ± 0.13 3. PLC ± - 4. PLC ± - ANGLES ± -	WEIGHT -	SIZE A1	CAGE CODE 00779	DRAWING NO. 794068
MATERIAL -	FINISH -	CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 1	REV G