



LOC	DIST	REVISIONS			DATE	DWN	APVD
—	—	P	LTR	DESCRIPTION			
		A		Obsolescence of P/N 826539-6	24JULY2013	SMT	RP

POLZ.	L±0.5	BESTELL-NR.	
1	3.3	826-539-1	△3
2	7.3	—	△2
3	11.3	—	△3
4	15.2	—	△4
5	19.2	—	△5
6	23.1	—	△6
7	27.1	—	△7
8	31.1	—	△8
9	35.1	—	△9
10	39.0	1-	△0
11	43.0	1-	△1
12	46.9	1-	△2
13	50.9	1-	△3
14	54.8	1-	△4
15	58.8	1-	△5
16	62.8	1-	△6
17	66.7	1-	△7
18	70.7	1-	△8
19	74.7	1-	△9
20	78.6	2-	△0
21	82.6	2-	△1
22	86.5	2-	△2
23	90.5	2-	△3
24	94.4	2-	△4
25	98.4	2-	△5
26	102.4	2-	△6
27	106.3	2-	△7
28	110.3	2-	△8
29	114.2	2-	△9
30	118.2	2,3-	△0
31	122.2	3-	△1
32	126.1	2,3-	△2
33	130.1	2,3-	△3
34	134.0	3-	△4
35	138.0	3-	△5
36	141.6	2,3- 826-539-6	△6

ZEICHNUNG GÜLTIG AB 20/90.....

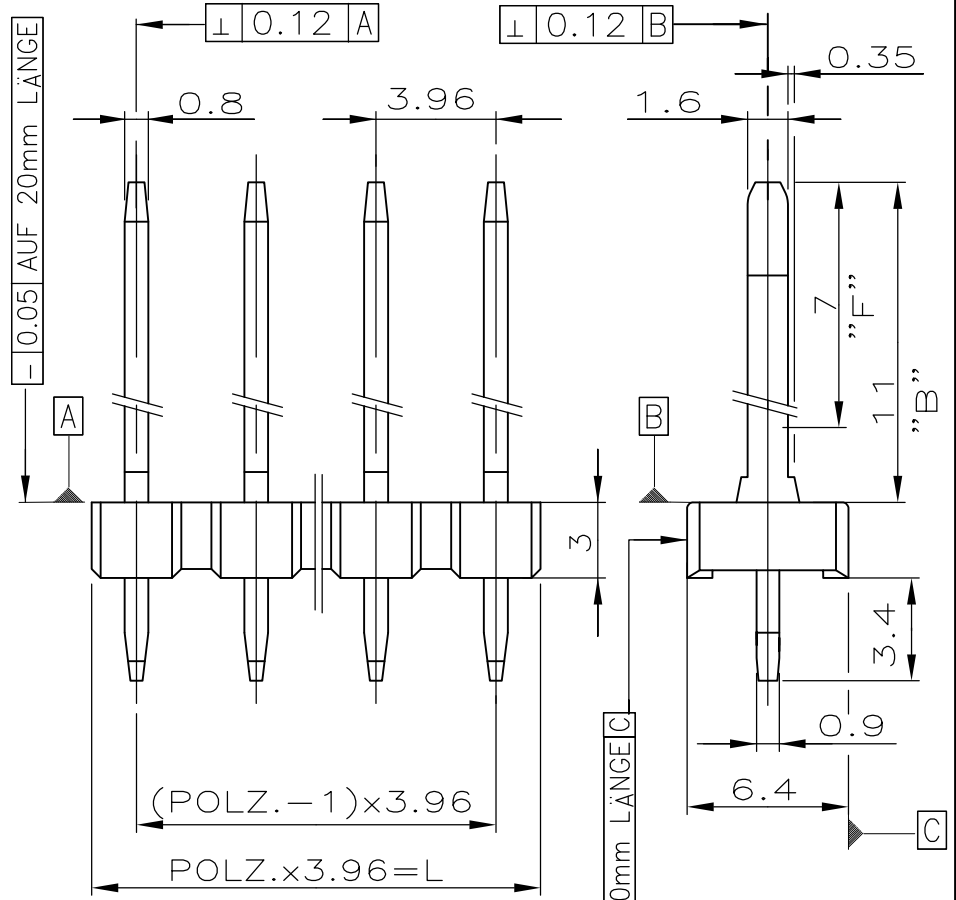

BOHRBILD

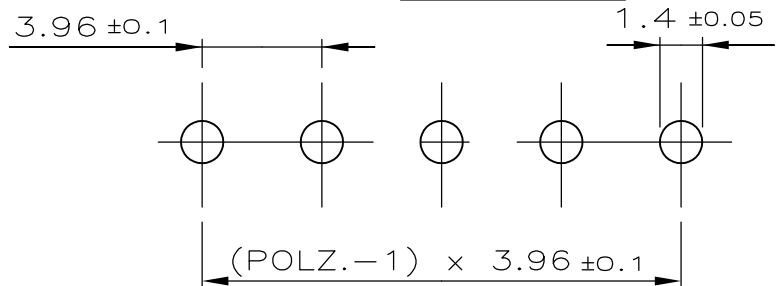

- 1 STECKSEITE: IM BEREICH "F" 0,8 μm GOLD ÜBER 1,27 μm NICKEL IM BEREICH "B"
- 2 LÖTSEITE: MIN. 2,5 μm ZINN ÜBER 1,27 μm NICKEL
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- △3 OBSOLETE

KONTAKTSTIFT	Cu Sn	△1
STIFTGEHÄUSE	PBT-GV	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED. RELEASED FOR PUBLICATION BY - COPYRIGHT -

DIMENSIONS: mm	DWN	23.11.84	MATERIAL	—	FINISH	—
	CHK	24.01.85	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3mm	APVD	—				
0 PLC ± -	PRODUCT SPEC	—	NAME			AMPMODU I STIFTL. RASTER 3.96 EINREIHIG
1 PLC ± -	APPLICATION SPEC	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -	WEIGHT	—	A4	00779	C-826539	—
3 PLC ± -	CUSTOMER DRAWING			SCALE	4:1	SHEET 1 OF 1
4 PLC ± -						REV A
ANGLES ± -						