

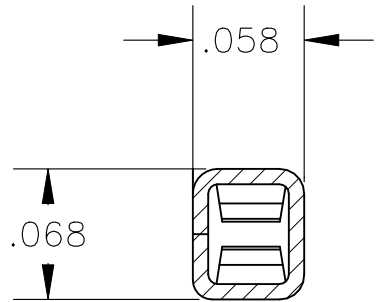
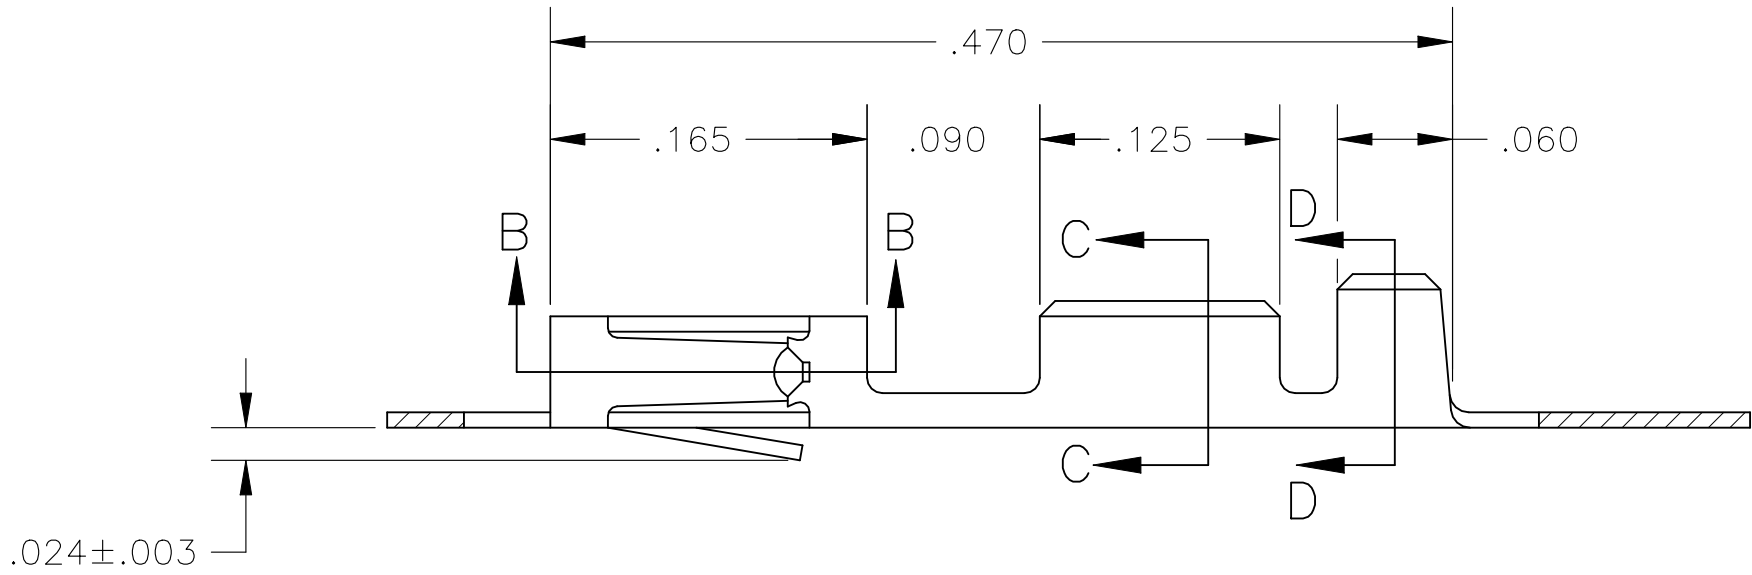



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	L2	REVISED PER ECN-23-237728	02NOV2023	RK	MM

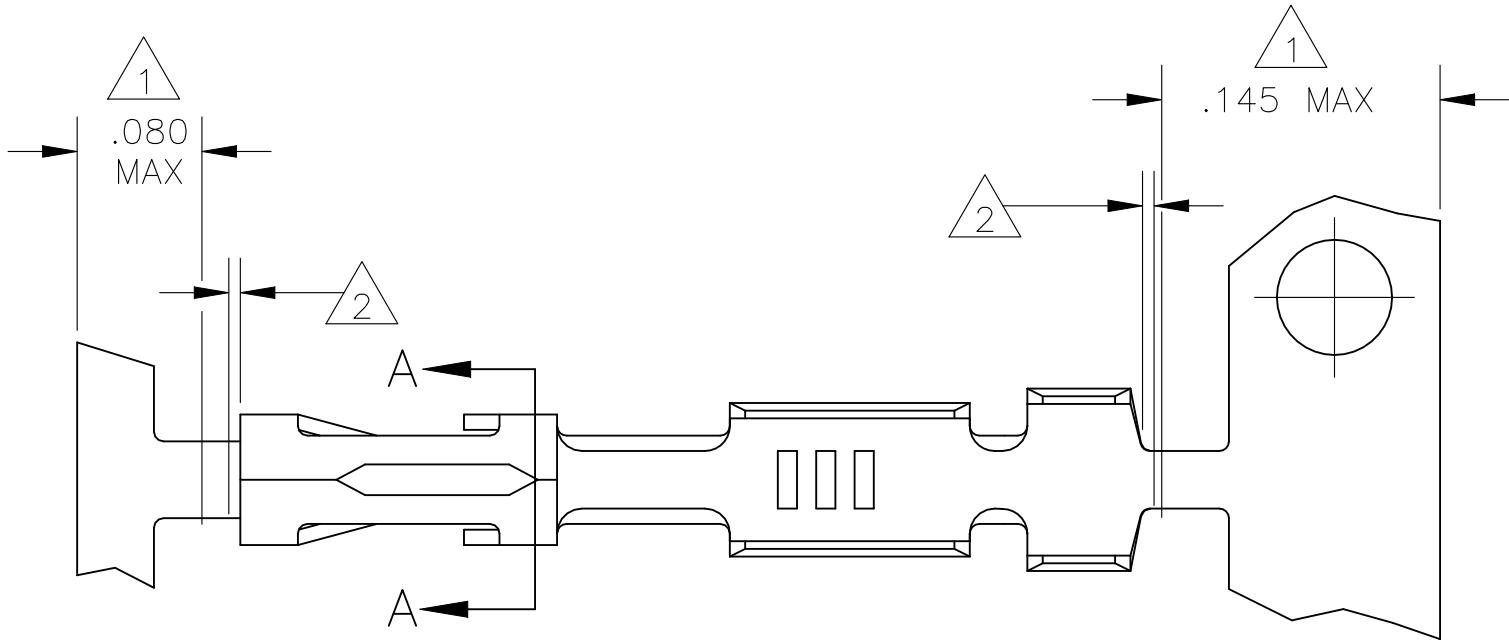


SECTION A-A

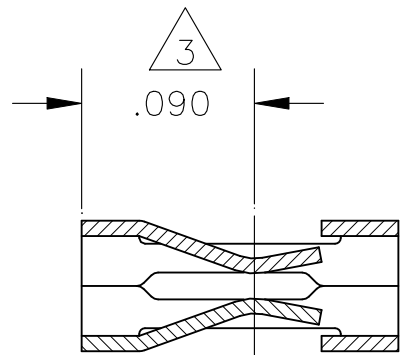

SECTION B-B

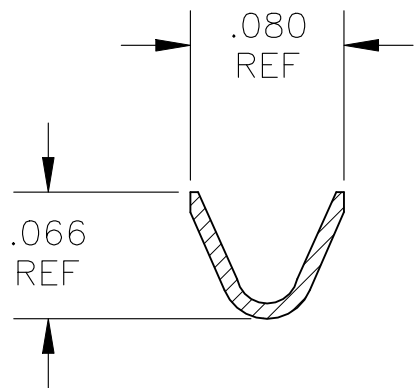


WIRE SIZE #20-#24
SECTION C-C

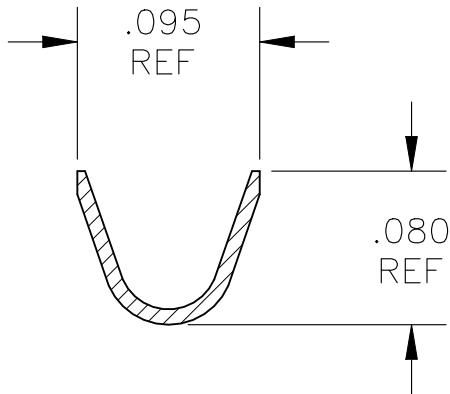

INSULATION RANGE .069 MAX
SECTION D-D

- 1 PLATING IS NOT REQUIRED IN THIS AREA.
- 2 .006 MAX LOOSE PIECE CUT-OFF.
- 3 POINT OF MEASUREMENT FOR PLATING THICKNESS, INSIDE BEAMS
- 4 .000050-.000150 PREPLATED BRIGHT TIN.
- 5 .000030 GOLD IN CONTACT AREA, GOLD FLASH ON THE REMAINDER, ALL OVER .000050 NICKEL.
- 6 .000030 GOLD OVER .000050 NICKEL ENTIRE TERMINAL.
- 7 .000050 GOLD OVER .000050 NICKEL ENTIRE TERMINAL.
- 8 .000015 GOLD IN CONTACT AREA, GOLD FLASH ON THE REMAINDER, ALL OVER .000050 NICKEL.
- 9 SHEARED EDGES ARE PERMITTED TO BE UNPLATED.
- 10 .000015 GOLD IN CONTACT AREA, .000050 NICKEL ON ENTIRE TERMINAL.
- 11 OBSOLETE PART NUMBER.

2-87309-5	OBSOLETE	2-87309-4	B
2- -3	OBSOLETE	2- -1	
2- 11 -0	1- 11 -8	9 10 1 11 -9	
1- 11 -7	11 -6	8 1 -2	
1- 11 -6	11 -5	7 1 11 -1	
1- 11 -5	11 -4	6 1 11 -0	
1- -4	-3	5 -9	
1-87309-3	87309-2	4 87309-8	
LOOSE PIECE PART NUMBER	STANDARD APPLICATOR PART NUMBER	FINISH	MINI APPLICATOR PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L D RINGLEY 28JAN85		 TE Connectivity			
		CHK R J DAVIS 30JAN85					
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD R J DAVIS 30JAN85		NAME	
		0 PLC ± -		PRODUCT SPEC		CONTACT, MOD V CRIMP SNAP-IN —	
		1 PLC ± -		—			
		2 PLC ± -		APPLICATION SPEC			
		3 PLC ± .005		—			
		4 PLC ± -				SIZE	
		ANGLES ± ±				CAGE CODE	
MATERIAL		FINISH		WEIGHT —		DRAWING NO	
PHOS. BRONZE .008 THICK		SEE TABLE		A2 00779		C=87309	
				CUSTOMER DRAWING		RESTRICTED TO —	
				SCALE 10:1		SHEET 1 of 1	
						REV L2	