

NUMBER 917485





METRIC

PRINT DIST
単位: 全 DIMENSIONS IN MM. DO NOT SCALE PRINT

AMP-J
REV. 10/83

NOTE

△ PdNi & GOLD FLASH, CONTACT AREA ONLY

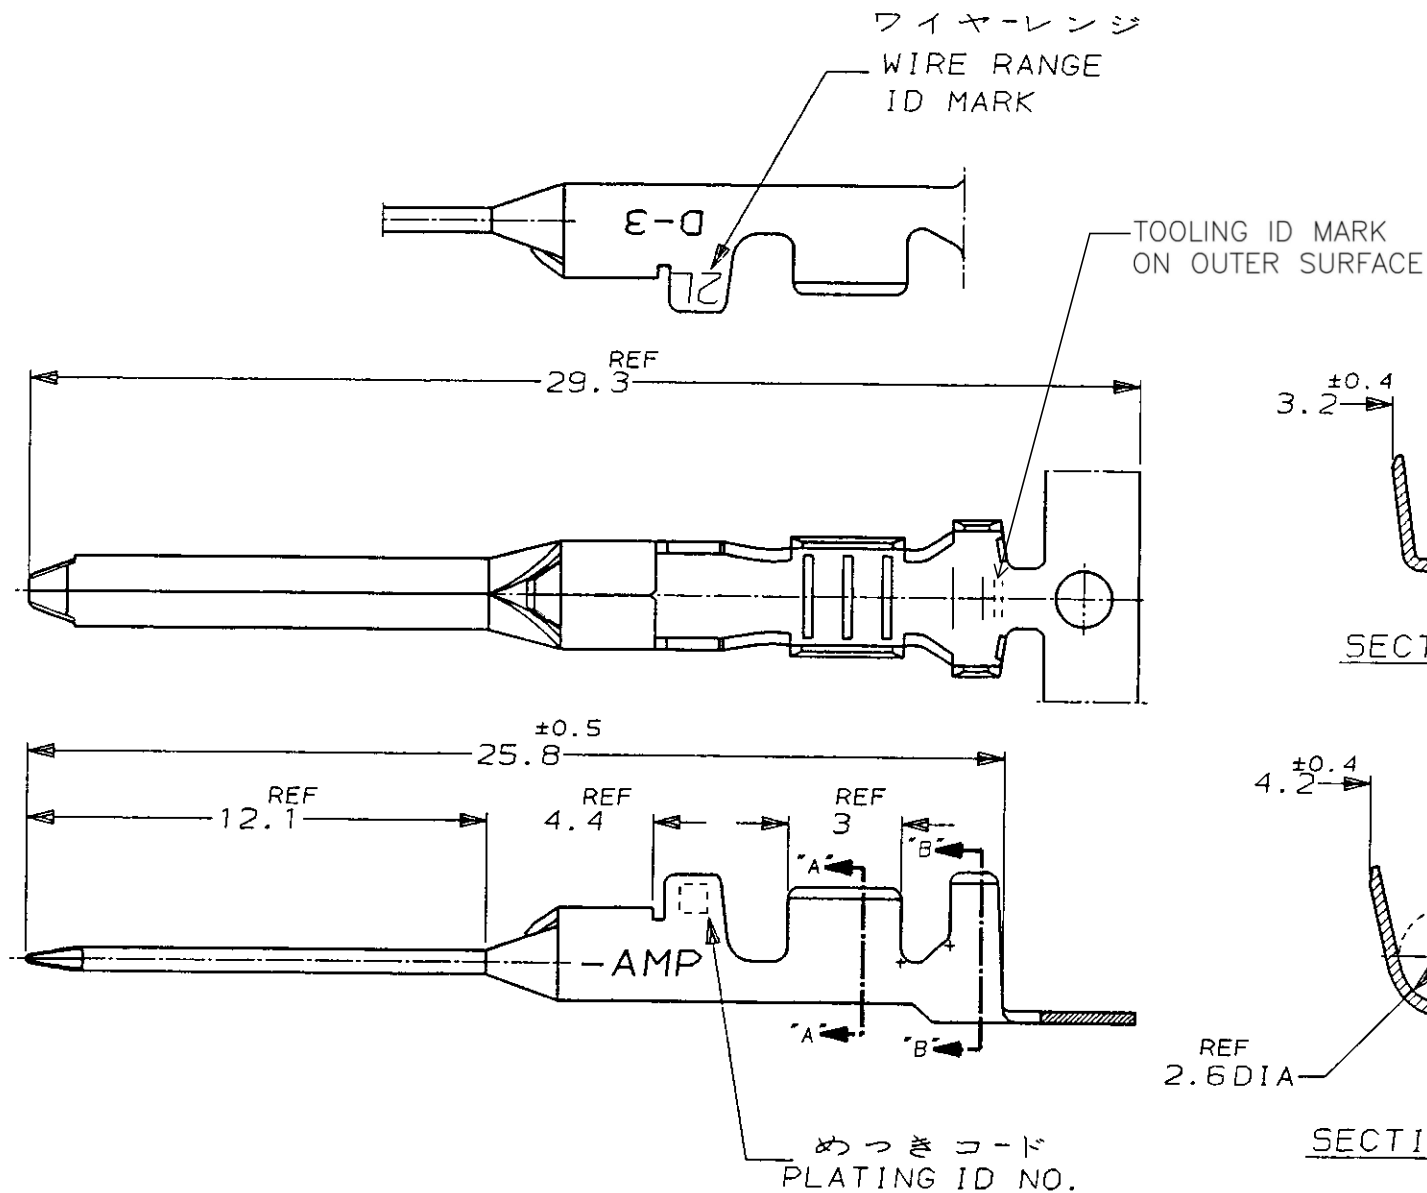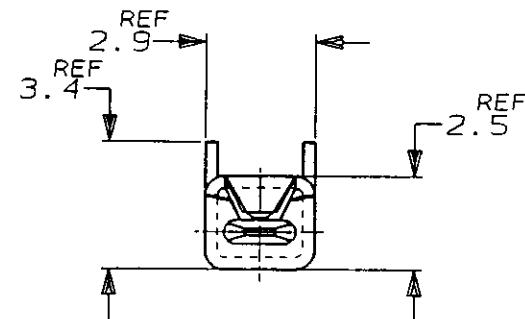

5	光沢錫めっき (BRIGHT TIN-PL.)	-5	-5
3	△ 0.76μm 最小金めっき (0.76μm MIN. Au-PL.)	-3	-3
7	△ (0.38μm MIN PdNi & GF-PL) ONLY	917512-2	917485-2
めっきコード (PL. ID NO.)	仕上 (FINISH)	単体 (L/P)	型番 (P/N)

				TE TE Connectivity			
C	REVISED PER ECR-25-233040	F.Z	R.B	27/JAN/2025	名称 (NAME)		
B	REVISED PER ECR-15-011723	Y.O	E.T	10/AUG/2015	"2L" SIZE (DYNAMIC D-3 SERIES TAB. CONTACT)		
A	REVISED (FJ00-2906-95)	K.I	Y.I	31/JUL/95	ダイナミック D-3 シリーズタブコンタクト		
O	RELEASED (FJ00-1975-95)	K.I	S.M	28/APR/95	一般公差 (GENERAL TOLERANCE)		
LTR	変更 (REVISION RECORD)	DR	CHK	DATE	SIZE LOC 番号 (No.)		
組合電線断面 (WIRE RANGE)					AWG 16-14 2.2-2.8 mmφ		
材料 (MATERIAL) (COPPER ALLOY) 銅合金					仕上 (FINISH) (SEE TABLE) 表参照		
DR. 27/APR/95 K. IKEDA					10以下: ±0.2		
CHK. 28/APR/95 S. MAYABE					10を越え 30以下: ±0.25		
					30を越え 100以下: ±0.3		
					角度: ±3°		
					尺度 (SCALE) REV. SHEET		
					5-1 C 1 OF 1		

(CUSTOMER DRAWING) 参考 図 面