
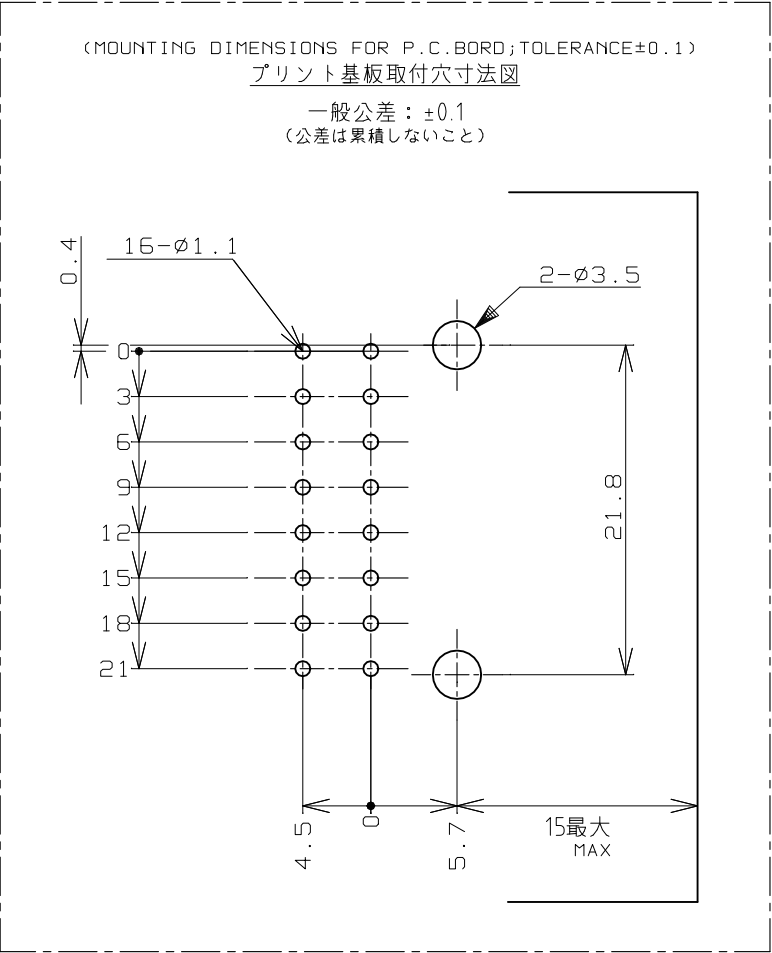
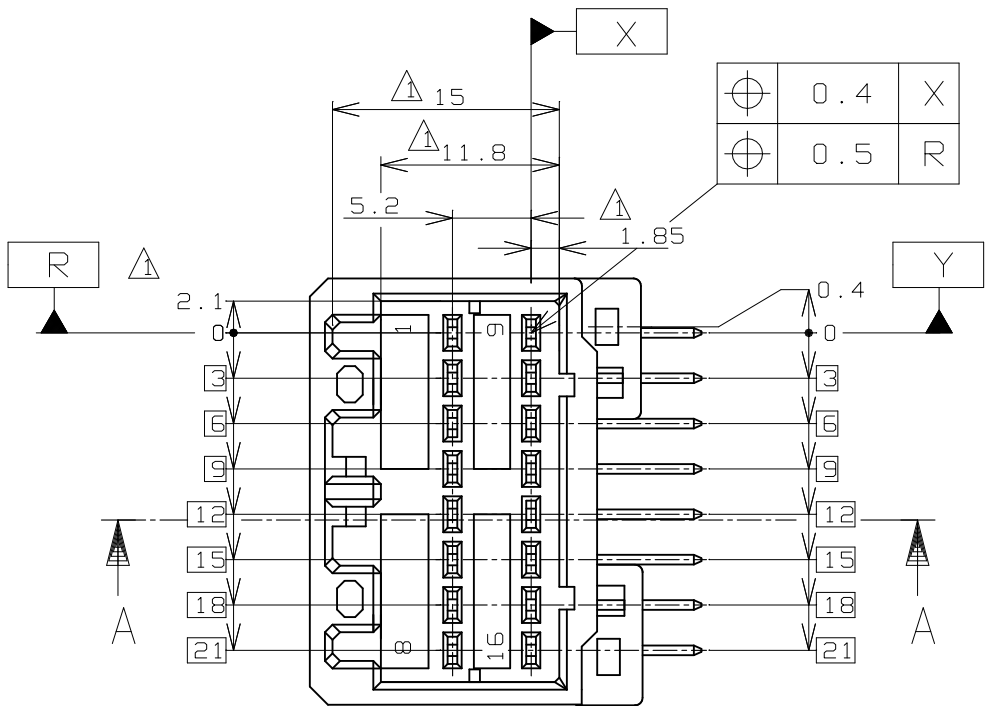
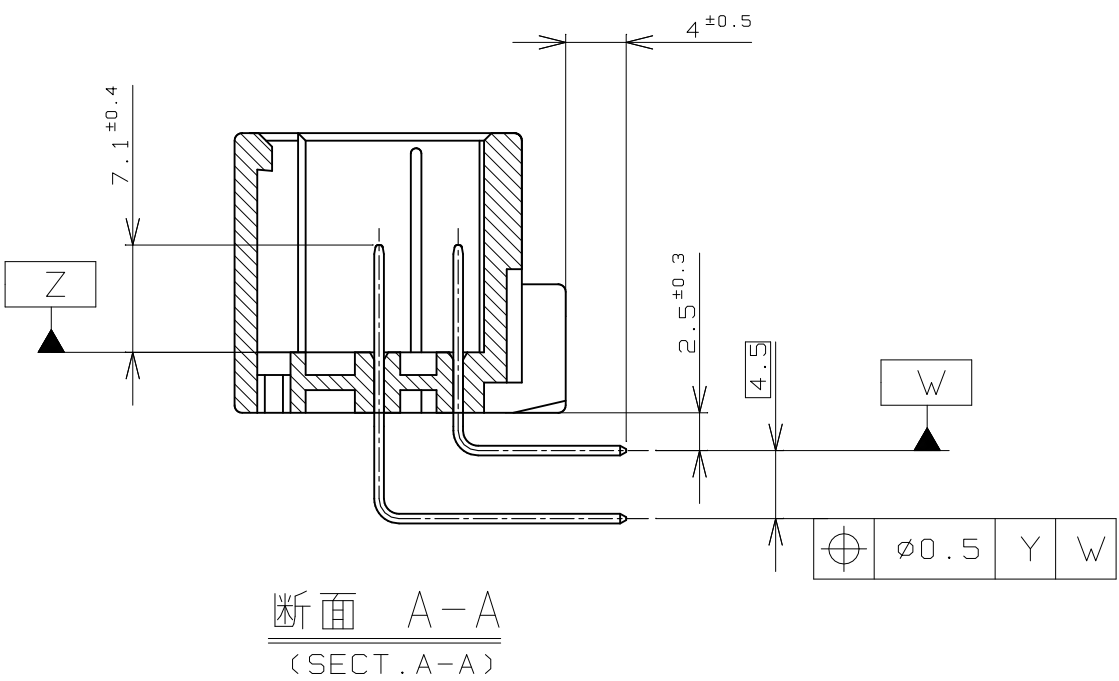
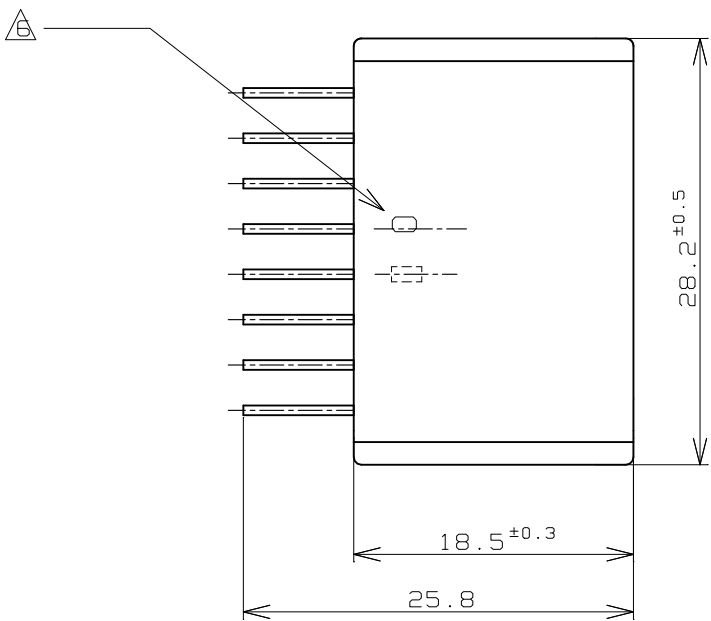


D

C


B

A

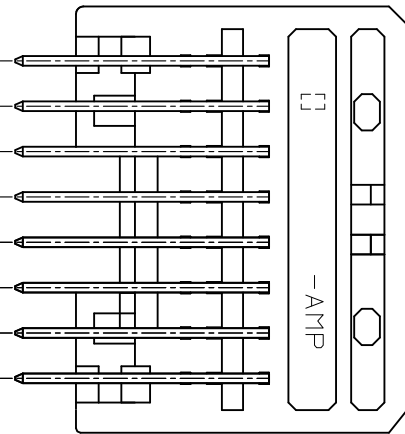

1. MUST BE KEPT BETWEEN **-Z-** AND 2
2. THE MATING PLUG HSG.PART NUMBER: 917981
3. RECOMMENDED MOUNTING SCREW ; 3mm DIA, 6mm LENGTH (MAX.)
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
(TIGHTENING TORAUE; 0.4N-m (4Kg-cm) MAX)
4. APPLICABLE PRODUCT SPEC NO.: 108-5342
5. CIRCUIT NUMBER
SIGNAL CIRCUIT NO. ① ~ ⑯
6. INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY HOT MARK

1. **-Z-** 面から2mmの範囲で測定
2. 嵌合相手ハウジング型: 917981
3. 推奨取付ねじ: JIS B1115, B1122 タッピングねじ, なべ2種
呼び径3, 長さ6mm以下 (締付けトルク; 0.4N-m (4kg-cm) 以下)
4. 適用製品規格番号: 108-5342
5. 回路番号: 上図参照のこと
シグナル回路 ① ~ ⑯
6. 適用製品型番のプリフィックス及びIDマークを
カラーホットマークにて表示



OBSOLETE	0	PRE-TINNED 錫メッキ×16		///	///	BLACK 黒色	917960-2
	0	PRE-TINNED 錫メッキ×16		///	///	WHITE 白色	917960-1
MARKING マーキング	SOLDERING SIDE 半田付け部		CONTACT SIDE 接触部側	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	HOUSING COLOR ハウジング色	PART NO
	FINISH OF CONTACT タブ仕上 (本数)		CIRCUIT NO. OF GOLD PLATED CONTACT 金メッキ端子使用回路番号				
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN D.MATSUURA	11/17'95	TE Connectivity	
				CHK K.AOYAMA	11/20'95		
DIMENSIONS: 単位: 耗 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD K.AOYAMA	11/20'95	NAME 名称 16POSITION CAP HOUSING ASSEMBLY 040/070 SERIES HYBRID I/O CONNECTOR	
				PRODUCT SPEC 製品規格			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 公差		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		APPLICATION SPEC 取付適用規格		SIZE A2	
				WEIGHT			
MATERIAL 材料		FINISH 仕上		CAGE CODE 00779		DRAWING NO 番号 C=917960	RESTRICTED TO —
HOUSING : PBT CONTACT : BRASS		SEE TABLE 表参照		CUSTOMER DRAWING		SCALE 尺度 2:1	SHEET 1 of 1
						REV C2	