


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C4	REVISED PER ECR-23-166943	03MAR2023	BB	DSC




PART NO. BESTELL-NR.	SIZE		RECOMMENDED STRIP LENGTH ABISOLIER-LÄNGE	MINIMUM PULL-OUT STRENGTH SLEEVE STRAND CONDUCTOR MINDEST-AUSZUGSKARFT HULSE LITZENLEITER /N	COLOUR FARBE	d_1	d_2	L_1	L_2	s_1	s_2	COLOUR TYPE FARBREIHE	PACKAGE QTY VERPACKUNGSEINHEIT PARTS/STÜCK REEL/SPULE
	mm ²	AWG	/mm		Δ	/mm	/mm	/mm	/mm	/mm	/mm		
966 900-2	0.50	20	10.5+0.2	20	WHITE WEIß	1.0 ^{+0.14}	2.6 ±0.2	14 ±1.5	8 ±0.4	0.15 ±0.05	0.30 ±0.10	DIN/1	10000

NOMINAL SIZE NENNGRÖÖE /mm ²	R /mm
0.5 - 0.75	3.6
1 - 1.5	4.2
2.5	5.0

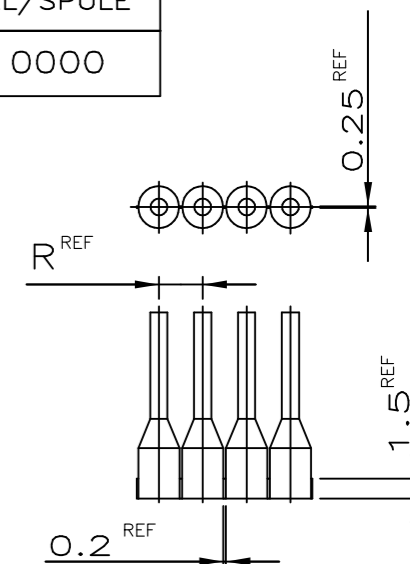

- Δ 1 THE AWG CROSS-SECTION CAN DIFFER SLIGHTLY FROM THE DIN-STANDARD CROSS-SECTION VALUES
- 2 NOTE DELETED
- Δ 3 MAX. INSULATION-DIA. OF WIRE: d_2 MIN.- 0.1
- Δ 4 COLOUR TYPE 1: COLOUR PER FRENCH STANDARD
DIN COLOUR TYPE: COLOUR PER DIN 46228 PART 4
- 5 NOTE DELETED
- Δ 6 0.6MM ALLOWABLE MOLDING FLASH PRESENT IN THIS ZONE
- Δ 7 STRIP FORM ON CARDBOARD REEL, DIA. ABOUT 450 mm
- Δ 8 MATERIAL:
METAL SLEEVE - COPPER
PLASTIC SLEEVE - POLYPROPYLENE
- Δ 9 FINISH:
METAL SLEEVE - TIN PLATE 3µm MIN THICKNESS
PLATE SLEEVE COLOR - SEE TABLE
- 10 MAXIMUM RECOMMENDED TEMPERATURE 105°C
- Δ 11 PARTS PER DIN 46228 PART 4 EXCEPT FOR S2 DIMENSION WHICH INCLUDES PLASTIC CARRIER STRIP CUTOFF BURR

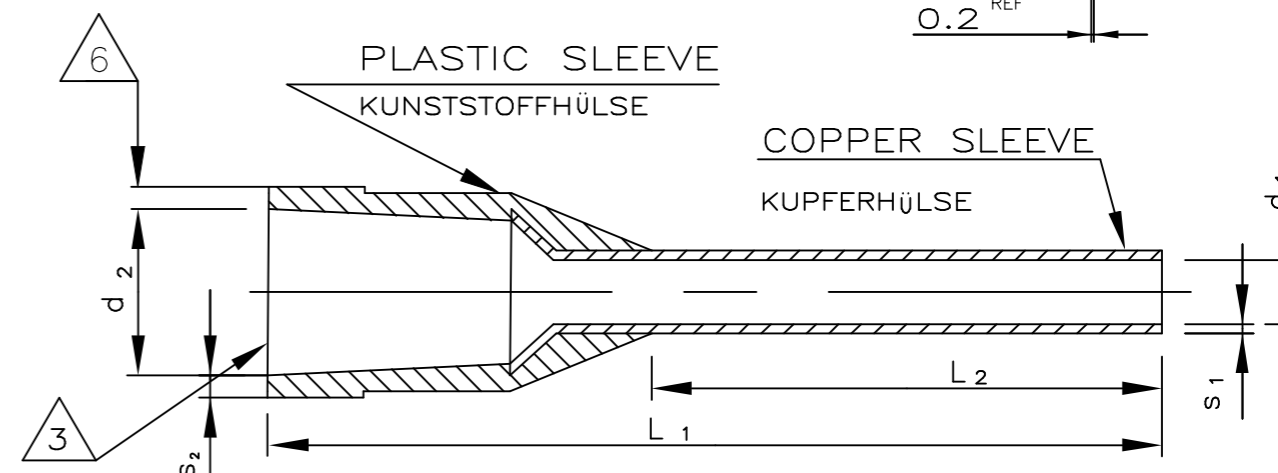

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E. WERNER 29-APR-96	STE TE Connectivity	
		CHK R.SCHMIDT 29-APR-96		
DIMENSIONS: mm		APVD G.FELDMEIER 12-SEP-00	NAME WIRE FERRULE WITH PLASTIC SLEEVE, SINGLE CONDUCTOR, DIN 46228 PART 4, STRIP & REEL FORM DIN_& FRENCH COLOR CODING	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE A3	
0 PLC ± -		APPLICATION SPEC	CAGE CODE 00779	DRAWING NO C-966900
1 PLC ± -		WEIGHT	RESTRICTED TO	
2 PLC ± -			SCALE	
3 PLC ± -			SHEET	
4 PLC ± -			1 OF 1	
ANGLES ± -			REV	
FINISH			C4	
MATERIAL			CUSTOMER DRAWING	