




ARMOUR RODS

CATALOGUE NUMBER: NAA1790-1880 SUITS CONDUCTOR

STRANDING	COND. TYPE	DIAMETER	FITTING LAY
19/3.75	AAC/AAAC	18.80	RIGHT HAND
30/7/0.102	ASCR	18.14	RIGHT HAND

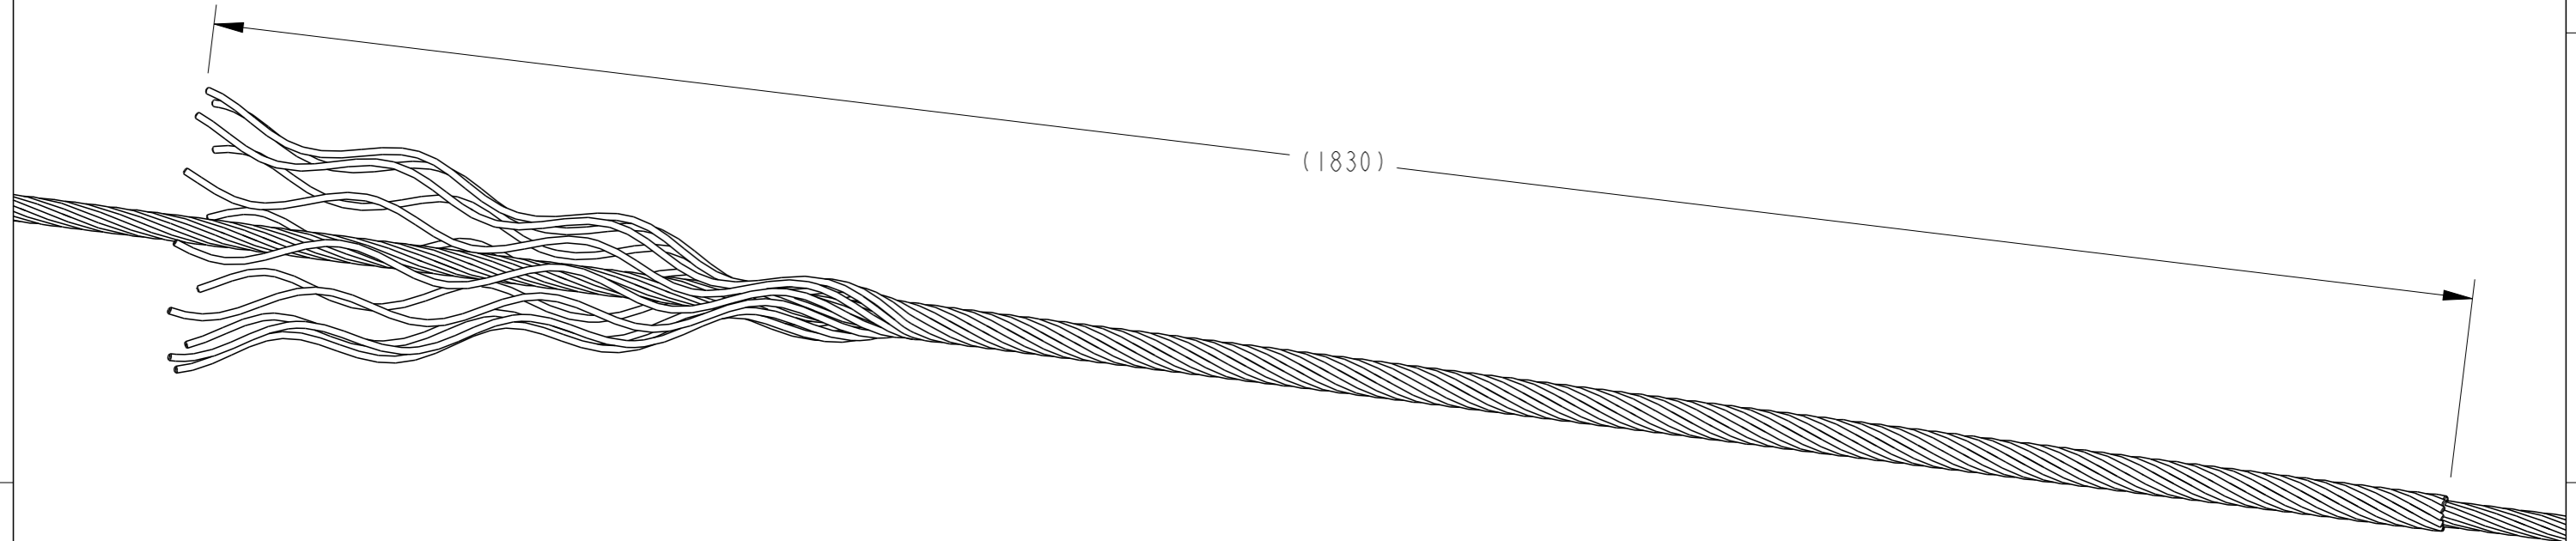

BOX LABEL

P/N: NAA1790-1880
ID:
DESCRIPTION:
 NON-TENSION ALUMINIUM ARMOUR RODS (NAA) FITTING
 19/3.75 AAC/AAAC
 30/7/0.102 ASCR
RANGE: 17.90 - 18.80
COLOUR-CODE: BLACK
QTY: 10 **WEIGHT:** **BATCH:**

PRODUCT LABEL

NAA1790-1880
 19/3.75 AAC/AAAC
 30/7/0.102 ASCR

WEIGHT: 140g
BATCH NO:
MONTH/YEAR:

TECHNICAL SPECIFICATIONS;

CATALOGUE NUMBER: NAA1790-1880
DESCRIPTION: NON-TENSION ALUMINIUM ARMOUR RODS (NAA) FITTING
MATERIAL: ALUMINIUM ALLOY
NUMBER OF RODS: 12
ROD DIAMETER: 5.40mm
OVERAL LENGTH: 1830mm
END FINISH: BALLENDDED
FITTING LAY DIRECTION: RIGHT HAND
COLOUR CODED: BLACK
RODS ARE LABELED, BUNDLED IN A SET AND TAPED AT BOTH ENDS.

LOC							IMPLIED NOTES BURRS AND SHARP EDGES REMOVED SCREW THREADS ARE TO AS 1275 DO NOT WORK TO DIMS MARKED REF SURFACE FINISH 6.3 U.N.O. DIMS ARE IN mm. DO NOT SCALE	IMPLIED TOLERANCES HOLE DIA AND LOCATIONS: ±0.5mm. DIMENSIONS UP TO 30mm: ±1.5mm. DIMENSIONS OVER 30mm: ±5%. UP TO A MAX OF: ±5mm. ANGULAR DIMENSIONS: ±5°	TCPN - PART Alias UTX/DUL NAA1790-1880 Cat No NAA1790-1880	TITLE NON-TENSION ALUMINIUM ARMOUR RODS (NAA) FITTING COND. RANGE: Ø17.90-Ø18.80 19/3.75 AAC/AAAC 30/7/0.102 ASCR						
DIST	—	I	NEW RELEASE	30-04-2013	RN	AT	MATERIAL DESC ALUMINIUM ALLOY	MATERIAL NO -	MATL SPEC/STD/DRG NO -	PROCESS SPEC HEAT TREAT/PLATING NO -	DRAWN RN CHECKED MN DATE 30-04-2013 APPROVED AT	TE Connectivity 2/3 Corella Close Berkeley Vale NSW 2261 Australia				
POS	REV	REVISION RECORD		DATE	DWN	APVD	MATERIAL NO	MATL SPEC/STD/DRG NO	PROCESS SPEC HEAT TREAT/PLATING NO	SIZE A3	PROJECTION 3RD ANGLE	SCALE NTS	DRAWING NO NAA1790-1880-C	SHEET 1	OF 1	REV 1