


## SPECIFICATION CONTROL DRAWING



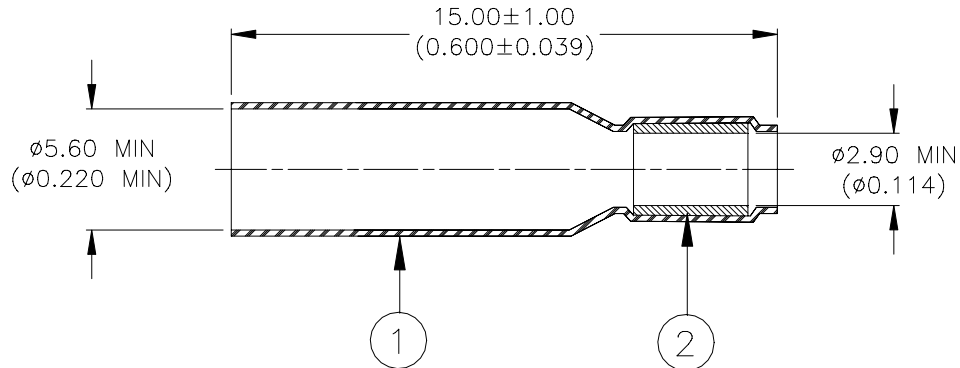

### MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SEALING RING: Thermally stabilized thermoplastic.

### APPLICATION

1. This device is used to cover a stub splice. It is suitable for crimps from 22AWG to 14AWG.
2. The recommended heating tool is the CV-1983 fitted with PR25 reflector.

 307 Constitution Drive Menlo Park, CA 94025, USA			TITLE: <b>SEALING SLEEVE</b>			
Unless otherwise specified dimensions are in millimeters. Inches dimensions are in between brackets.			DOCUMENT NO.: <b>B-006-04</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DCR NUMBER: D010423	REPLACES: N/A		
DRAWN BY: M. FORONDA	DATE: 10-Jul-01	PROD. REV. D	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check with the web for the latest revision.