


**CGPE - HW**  
Flexible, Commercial Grade, Polyolefin,  
Heat-Shrinkable Tubing

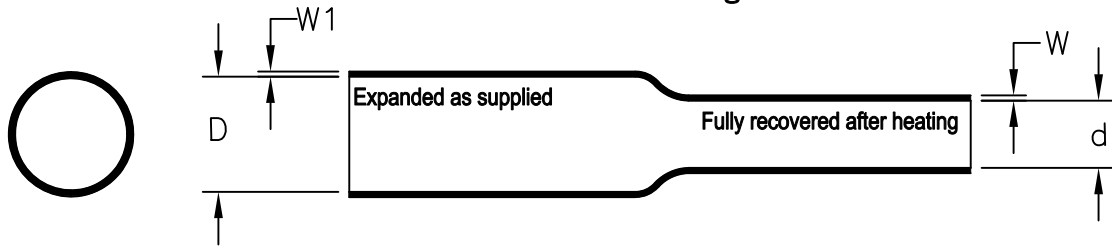

SIZE	As Supplied (mm)		As Recovered (mm)	
	Inside Diameter (D)	Wall Thickness (W1)	Inside Diameter (d)	Wall Thickness (W)
	Min. or as indicated	Nominal	Maximum	Min. or as indicated
6.0	6.0	0.8	4.5	1.0
8.0	8.0	0.6	4.5	1.0
12.0	12.7 ± 0.75	1.3	7.5	2.0 ± 0.1

RELEASED FOR PUBLICATION  
ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2018 TE Connectivity

For More Details See CGPE - 105 Specification, TEC - 108 - 120008

DIMENSIONS: mm		DWN J. Bitter	07-JUNE-17	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK -	-	
0 PLC ± -		APVD -	-	
1 PLC ± -		PRODUCT SPEC TEC-108-120008	NAME CGPE - HW Flexible Commercial Grade, Polyolefin	
2 PLC ± -		APPLICATION SPEC -	SIZE A4	CAGE CODE 06090
3 PLC ± -			DRAWING NO CGPE-HW	RESTRICTED TO -
4 PLC ± -				
ANGLES ± -		WEIGHT 0		
		CUSTOMER DRAWING		
		SCALE None	SHEET 1 of 1	REV D



TE Connectivity  
305 Constitution Drive  
Menlo Park, CA 94025 USA