


CGPE - HW
Flexible, Commercial Grade, Polyolefin,
Heat-Shrinkable Tubing

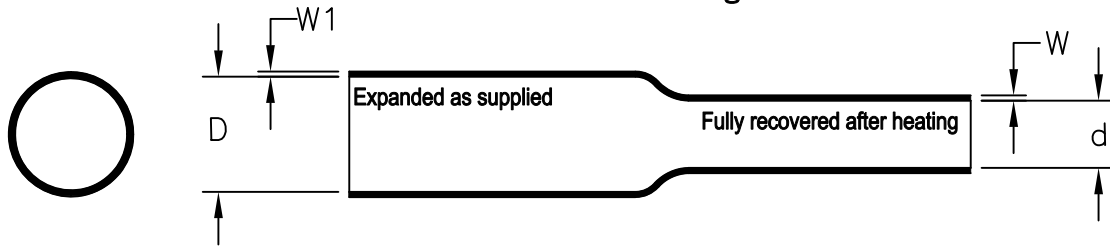


SIZE	As Supplied (mm)		As Recovered (mm)	
	Inside Diameter (D)	Wall Thickness (W1)	Inside Diameter (d)	Wall Thickness (W)
	Min. or as indicated	Nominal	Maximum	Min. or as indicated
6.0	6.0	0.8	4.5	1.0
8.0	8.0	0.6	4.5	1.0
12.0	12.7 ± 0.75	1.3	7.5	2.0 ± 0.1

For More Details See CGPE - 105 Specification, TEC - 108 - 120008

THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.

© COPYRIGHT 2018 TE Connectivity

DIMENSIONS: mm		DWN J. Bitter	07-JUNE-17		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		CHK -	-		
		APVD -	-		
		PRODUCT SPEC TEC-108-120008	NAME CGPE - HW Flexible Commercial Grade, Polyolefin		
		APPLICATION SPEC -	SIZE A4	CAGE CODE 06090	DRAWING NO CGPE-HW
		WEIGHT 0	CUSTOMER DRAWING		
		SCALE None	SHEET 1	OF 1	REV D