


SPECIFICATION CONTROL DRAWING

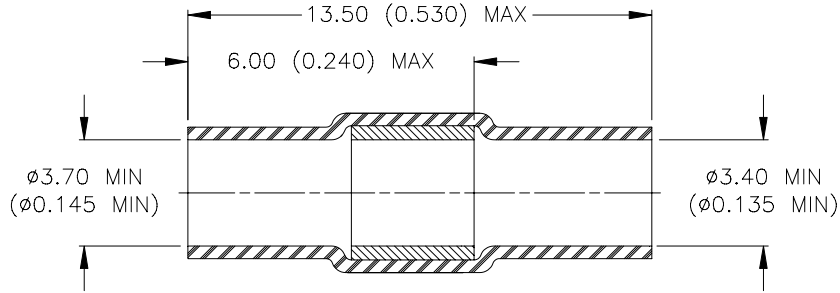

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene flouride.
2. SOLDER PREFORM WITH FLUX:
 - SOLDER: Sn63Pb37 per ANSI/J-STD-006.
 - FLUX: ROM1 per ANSI/J-STD-004.

APPLICATION

1. This part is designed for use in attaching the braided shield of a cable to the tabs of a Tyco Electronics Bussbar. It may be used on cables rated for at least 125°C.
2. Part must be installed in accordance with Tyco Electronics/Raychem Engineering Standard ES-71059.
3. Temperature rating: -55°C to +125°C.

tyco <i>Electronics</i>	Tyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.	Raychem	TITLE: SOLDERSLEEVE DEVICE				
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO.: D-110-0221				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DOC. ISSUE: 6	DATE: 5-Jun-03		
DRAWN BY: M. FORONDA	CAGE CODE: 06090	REPLACES: D990729	DCR NUMBER: D030298	PROD. REV.: A	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.