



CUSTOMER DRAWING

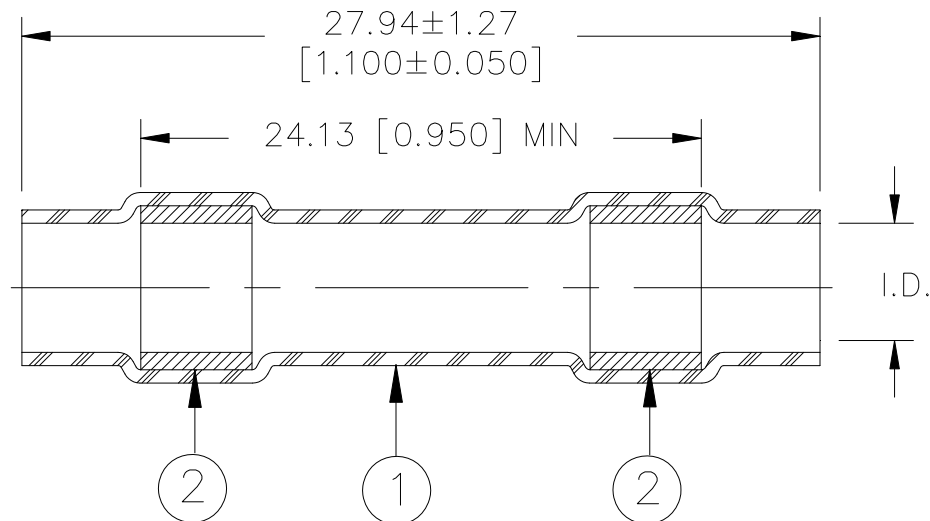


SEALING SLEEVE

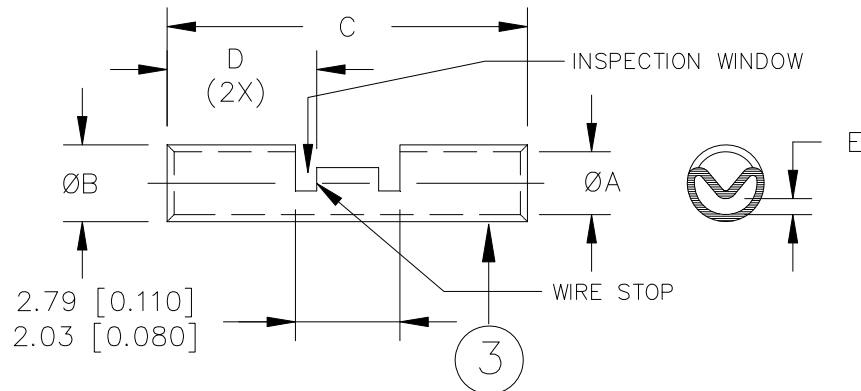

METAL CRIMP SPLICE

Product Description	I.D.* a (min) b (max)	Product Dimensions				
		A	B	C	D	E max
D-436-37-UP	2.79 (0.110) 0.64 (0.025)	1.75 (0.069) 1.63 (0.064)	2.69 (0.106) 2.57 (0.101)	14.86 (0.585) 14.35 (0.565)	7.11 (0.280) 6.60 (0.260)	0.51 (0.020)
D-436-38-UP	4.32 (0.170) 0.64 (0.025)	2.59 (0.102) 2.46 (0.097)	3.89 (0.153) 3.73 (0.147)	14.86 (0.585) 14.35 (0.565)	7.11 (0.280) 6.60 (0.260)	1.27 (0.050)

* I.D.: a) As received; b) After unrestricted recovery thru meltable insert.

 TE Connectivity			TITLE: IN-LINE SPLICE SEALING SYSTEM, UN-PLATED		
Unless otherwise specified dimensions are in millimeters.[Inches dimensions are shown in brackets] Dimensioning and Tolerancing per ASME Y14.5-2009		Raychem Devices	DOCUMENT NO.: D-436-37/-38-UP		
TOLERANCES: 0.00 ± 0.02 MM 0.0 ± 0.2 MM 0 ± 0.5 MM	ANGLES: ± 0°30' ROUGHNESS IN MICRON	Tyco Electronics Corporation reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV: A	DATE: 6-Aug-12	
PREPARED BY: AREY	CAGE CODE: 06090	ECO NUMBER: ECO-12-014378	SCALE: NTS	SIZE: A	SHEET: 1 of 2

© 2012 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

CUSTOMER DRAWING

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SEALING RINGS: Immersion resistant thermoplastic. Color: one clear, one color coded (see table below).
3. CRIMP SPLICER:
Base Metal: Copper alloy 101 or 102 per ASTM B-75.
Plating: None

APPLICATION

1. These parts are designed to provide immersion resistant in-line splices of 1 to 1 wires falling within size range listed above, and having insulations rated for 135°C.
2. This document takes precedence over documents reference herein.

ASSEMBLY PROCEDURE:

1. Slide sealing sleeve onto one of the wires to be spliced.
2. Strip wires 5/16" to 11/32".
3. Insert one wire into barrel of crimp splicer and crimp using a Raychem AD-1377 crimp tool. Repeat for other wire.
4. Center sealing sleeve over the splice.
5. Apply heat, using an approved heat source, first to one of the inserts and then the other. Heat should be applied until insert melts and flows axially along the wire.

Unless otherwise specified dimensions are in millimeters.
(Inches dimensions are shown in brackets)

DOCUMENT NO.: D-436-37/-38-UP	REV: A	ECO NUMBER: ECO-12-014378	DATE: 6-Aug-12	SHEET: 2 of 2
---	------------------	-------------------------------------	--------------------------	-------------------------

If this document is printed it becomes uncontrolled. Check for the latest revision.