



P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	08JUN2023	BDA	MB


PART AS SUPPLIED

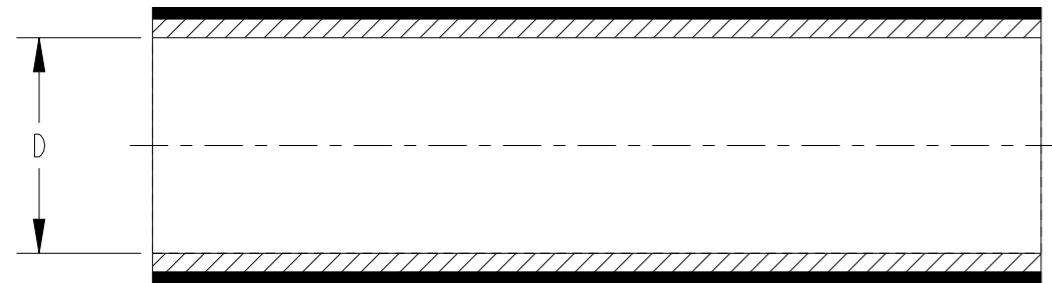

PART FULLY RECOVERED

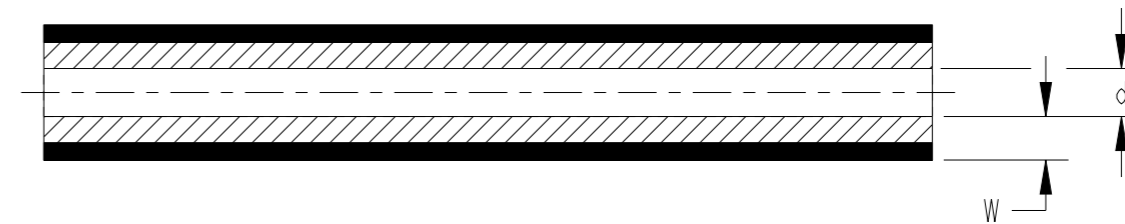

PRODUCT DIMENSIONS

PART NO	AS SUPPLIED		AS RECOVERED			
	MINIMUM EXPANDED I.D. (D)		MAXIMUM RECOVERED I.D. (d)		MINIMUM RECOVERED TOTAL WALL (W)	
	mm.	in.	mm.	in.	mm.	in.
DSPL-NR1	5.70	0.224	1.27	0.050	1.15	0.045
DSPL-NR2	7.50	0.295	1.65	0.065	1.40	0.055
DSPL-NR3	10.80	0.425	2.40	0.094	1.80	0.071
 DSPL-NR4	17.50	0.689	4.50	0.177	2.10	0.083

PRODUCT INFORMATION


- NON-FLAME RETARDANT
- OUTER JACKET: IRRADIATED MODIFIED POLYOLEFIN TYPE COLOUR: CLEAR (-X)
BLACK (-0)
INNER LINER: POLYAMIDE HOT-MELT ADHESIVE COLOUR: LIGHT AMBER (-X)
TEMPERATURE RATING 125°C
- SHRINK RATIO: 4:1
FULLY RECOVERED LONGITUDINAL SHRINKAGE 0 TO -10%
- TUBING CUT TO SPECIFIC LENGTHS CAN BE SUPPLIED FROM THE PRODUCT SIZES REFERENCED WITHIN THIS DRAWING

 DSPL-NR4 AVAILABLE IN BLACK ONLY

STANDARD CUTTING TOLERANCES (mm)	
CUT LENGTH	TOLERANCE
UPTO TO 9.90mm	±1.50mm
10mm TO 24.90mm	±1.50mm
25mm TO 54.90mm	±1.50mm
55mm TO 99.90mm	±3.00mm
100mm TO 149.90mm	±4.00mm
150mm TO 499.90mm	±5.00mm
500mm AND GREATER	±25.40mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm (Inches)



MATERIAL
SEE NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±0.1
2 PLC ±0.01
3 PLC ±0.001
4 PLC ±0.0001
ANGLES ±
FINISH -

DWN 08JUN2023
BASAVARAJA D A

CHK 08JUN2023
SELVAPANDIAN B


APVD 08JUN2023
MAYO BAKARE

PRODUCT SPEC
RK-6755

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING



NAME
DSPL-NR
DUAL WALL HEAT SHRINKABLE TUBING

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 - DSPL-NRX

SCALE NTS SHEET 1 OF 1 REV A