
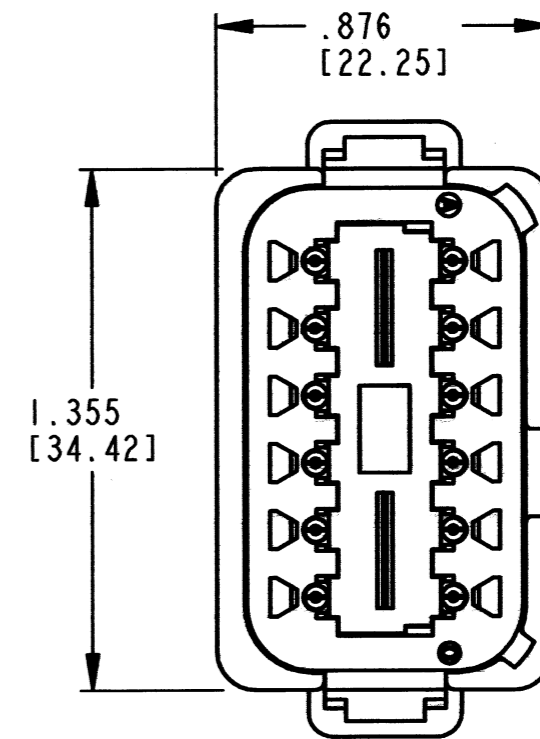
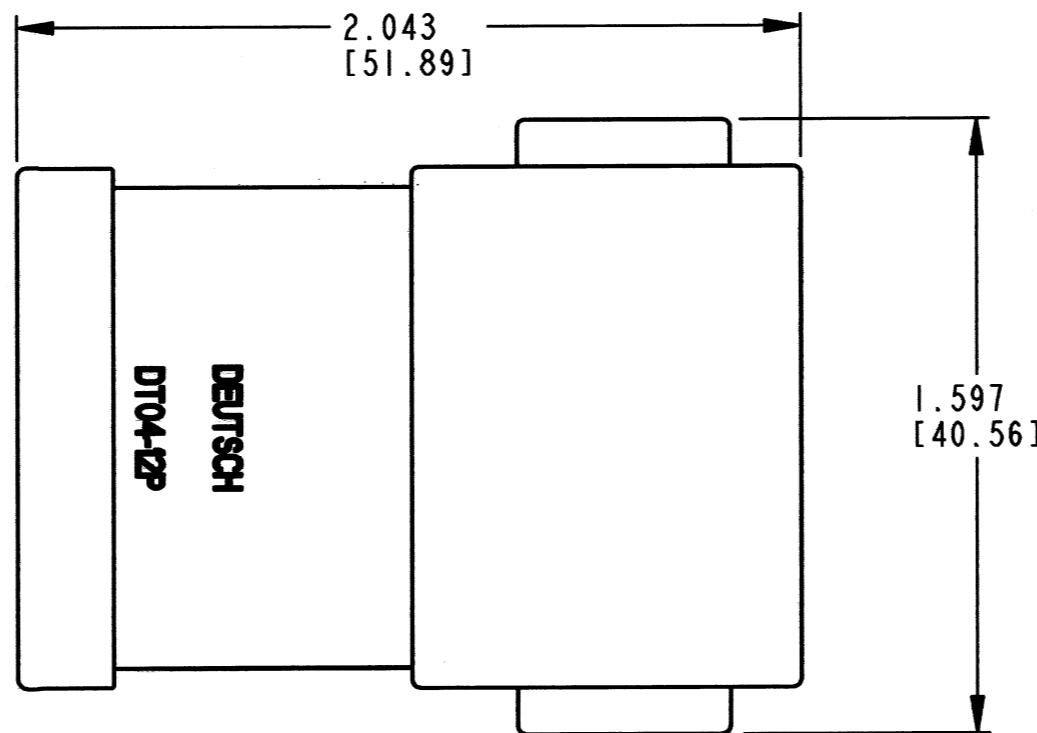
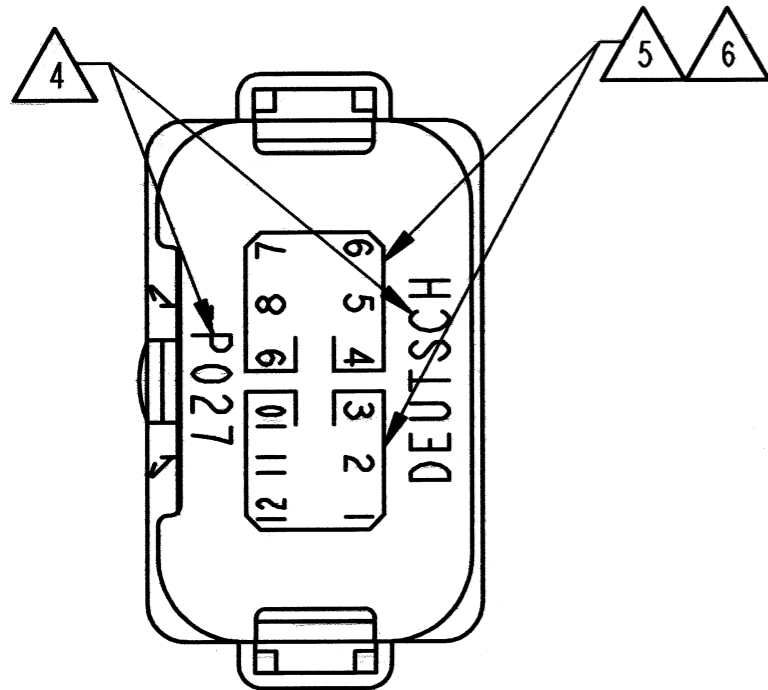


# 3D VIEW

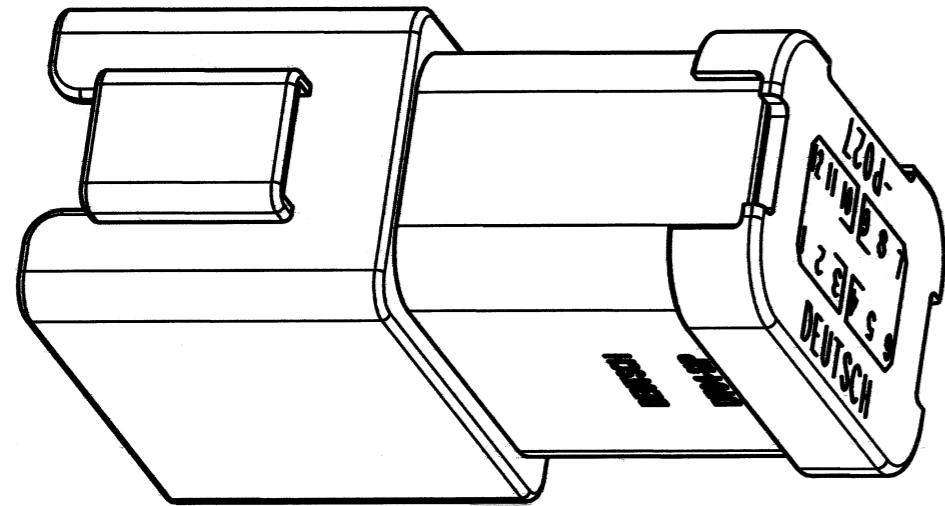

REV	DT04-12PA-P027
NC	

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. P21523	12/19/12	DM

5. BORDER SIGNIFIES THAT PINS 1,2,3,10,11,12 AND PINS 4,5,6,7,8,9 ARE BUSSED TOGETHER WITH 6 PIN BUSBARS.
4. ORIENTATION OF "DEUTSCH" AND "-P027" TO BE OPTIONAL.
3. THIS DT04-12PA-P027 MATES WITH DT06-12SA-\*\*\*\* (\*\*\*\* = ALL MODIFICATIONS). CONSULT FACTORY FOR MODIFICATIONS.
2. DIMENSIONS ARE ±.025[0.63] UNLESS OTHERWISE SPECIFIED.
1. DIMENSIONS ARE IN INCHES [MILLIMETERS].


NOTES:

6. THE 6 PIN BUSBAR HAS A MAXIMUM CURRENT RATING OF 39 AMPS.

SIGNATURE & DATE	
DR	A. MALAGON 19DEC12
CHK	K. Meyer 12/19/12
PE	K. Meyer 12/19/12
APPD	D. Meyer 12/19/12
SCALE	NONE WT

DT 12 WAY RECEPTACLE  
KEY ARRANGEMENT -A-  
(2) 6 PIN BUSBARS-GOLD PLATED  
COLOR: GRAY

ENVELOPE

EP	MATL. CODE
 3850 INDUSTRIAL AVE. HEMET, CA 92545	
<b>DEUTSCH</b> INDUSTRIAL	
<b>B DT04-12PA-P027</b>	
DWG SIZE	CODE 11139 SHEET   OF