

4

3


2

1

© - TE Connectivity. All Rights Reserved.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	NEW DRAWING	24FEB2020	RK	GS

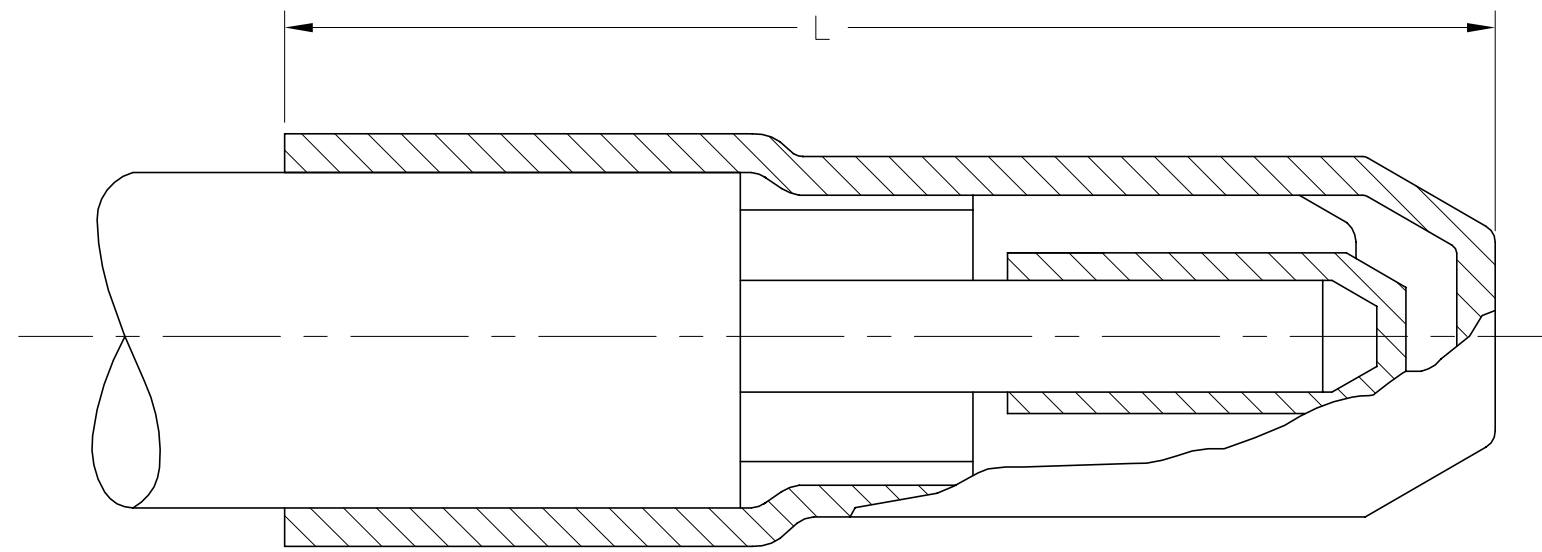

Cable cross section mm <sup>2</sup>	L: Min. Length mm	L: Max. Length mm
4-25	60	170
25-50	60	180
70-120	100	180
150-300	165	220

NOTES:

1. MATERIAL: JACKET - CROSS LINKED POLYOLEFIN BASED; COLOUR: BLACK
2. CONTINUOUS USE TEMP: -30° C TO 85° C
3. MIN RECOVERY TEMP 120° C

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA K 24FEB2020														
DIMENSIONS: mm		CHK GREG S 24FEB2020														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD GREG S 24FEB2020	NAME -													
<table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	PRODUCT SPEC -	LOW VOLTAGE LIVE END SEAL KITS	
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± -															
4 PLC	± -															
ANGLES	± -															
MATERIAL SEE NOTE		FINISH -	APPLICATION SPEC -	RESTRICTED TO -												
		WEIGHT -	SIZE A3	CAGE CODE 00779												
		CUSTOMER DRAWING	DRAWING NO G-EPD-202-312004-01	REV 1												
		SCALE NTS	SHEET 1 of 1													