

REV. C  
DCO 300855


TOLERANCES  $\pm .010$ " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE _____	CURRENT: 40mA MAX.
NOMINAL VOLTAGE _____	115 VAC - 400Hz
MUST OPERATE _____	70.0 VAC MAX., 400Hz
MUST RELEASE _____	25.0 VAC MAX., 8.0 VAC MIN., 400 Hz

ENVIRONMENT:	
VIBRATION _____	10 Hz TO 3000 Hz @ 30 g's
SHOCK _____	200 g's 6 MS. DURATION
TEMPERATURE _____	-70 °C TO +125 °C

NOTES: OPERATE TIME 15 mS MAX.  
RELEASE TIME 50 mS MAX.  
CONTACT BOUNCE 1 mS MAX.

CUSTOMER DATA SHEET

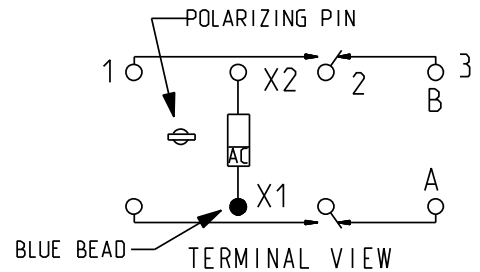

CONTACT RATING: \_\_\_\_\_  
10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE.  
100,000 OPERATIONS

DR. B.D. 06MAR2008 | CK. J.M.B. 5/14/08

**Tyco Electronics** ©COPYRIGHT 2005  
TYCO ELECTRONICS CORPORATION  
ALL INTERNATIONAL RIGHTS RESERVED

CUST. \_\_\_\_\_ CATALOG ITEM  
CUST. NO. \_\_\_\_\_ REV. \_\_\_\_\_

TE NUMBER  
1-1617752-5

CII PART NUMBER  
FCA-210-DY8