

REV. C
DCO 300855

TOLERANCES ±.010" - UNLESS OTHERWISE SPECIFIED


COIL: @ 25°C	CURRENT: 100mA MAX.
RESISTANCE _____	
NOMINAL VOLTAGE _____	28 VAC - 50/400Hz
MUST OPERATE _____	16.0 VAC MAX., 50/400Hz
MUST RELEASE _____	7.5 VAC MAX., 2.0 VAC MIN., 50/400 Hz

ENVIRONMENT:

VIBRATION	33 Hz TO 3000 Hz @ 30 g's
SHOCK	200 g's 6 MS. DURATION
TEMPERATURE	-70 °C TO +125 °C

NOTES: OPERATE TIME 15 mS MAX.
RELEASE TIME 50 mS MAX.
CONTACT BOUNCE 1 mS MAX.

CUSTOMER DATA SHEET

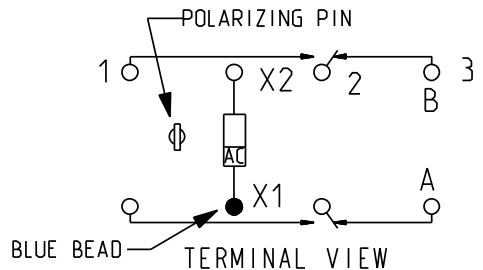

CONTACT RATING: _____
10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE.
100,000 OPERATIONS

DR. B.D. 07MAR2008 | CK. J.M.B. 5/14/08

Tyco Electronics ©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. _____ CATALOG ITEM _____
CUST. NO. _____ REV. _____

TE NUMBER
1-1617752-9

CII PART NUMBER
FCA-210-EY7