

REV. C
DCO 300853

TOLERANCES ±.010" - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE	70 OHMS ±10%
NOMINAL VOLTAGE	12 VDC
MUST OPERATE	6.9 VDC MAX.
MUST RELEASE	3.3 VDC MAX., 0.75 VDC MIN.

ENVIRONMENT:


VIBRATION 33 Hz TO 3000 Hz @ 30 g's

SHOCK 200 g's 6 MS. DURATION

TEMPERATURE -70 °C TO +125 °C

NOTES: OPERATE, RELEASE 15 MS MAX.
CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

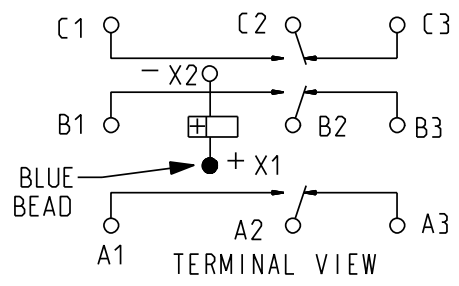

CONTACT RATING: _____
25 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
50,000 OPERATIONS

DR. B.D. 10APR2008 | CK. J.M.B. 5/14/08

Tyco Electronics ©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. _____ CATALOG _____
CUST. NO. _____ REV. N/A

TE NUMBER
3-1617753-7

CII PART NUMBER
FCA-325-AY2