



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
6		RELEASED AS PER ECO-17-009529	03JUL2017	PV	MP

a) Part as supplied.

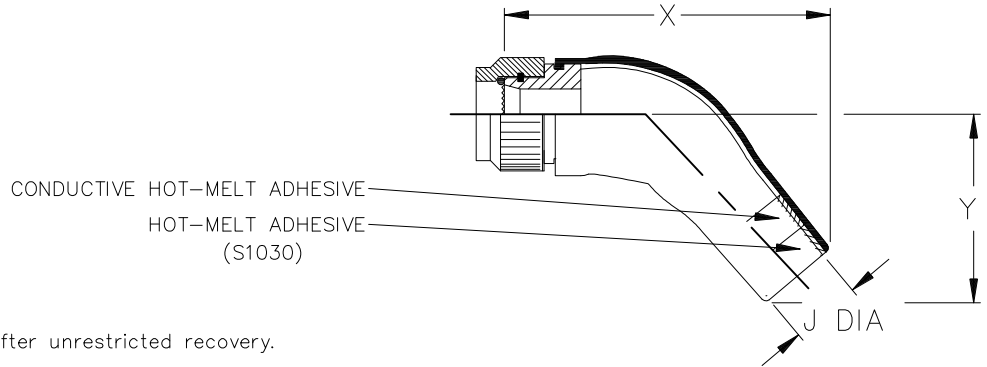

b) Part after unrestricted recovery.

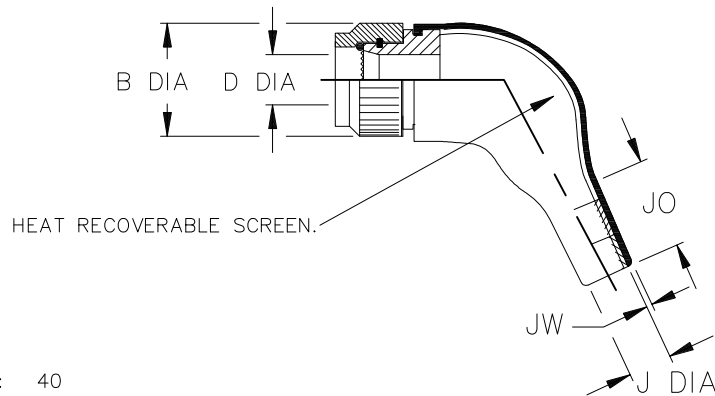

NOTES:

- Raychem Connector Code: 40
- Connector Series: MIL-C-38999 SERIES 3 & 4
- Adaptor Series: 208M7\*-19-B\*-K-NS (Olive Drab); Aluminium Alloy to BS1474 HE30TF, FC1 or 6262 Cadmium per QQ-P-416, Type II, Class 3 Over appropriate under plate, Per MIL-C-85049 (500 hour salt spray)
- Moulded Part Material: -100C (Black); Polyolefin/Silver Composites, semi-flexible ZEROHAL™ Low fire hazard
- Kits to include cleaning tissue, 1 piece 100 grit emery cloth & packing piece.
- Kit to be used in conjunction with installation guide for 90 & 45 deg. assemblies.

Dimensions in mm [inches for reference]

Part No.	Shell Size	B DIA MAX	D DIA MIN	J		JO REF b	JW ±30% b	X ±20% a	Y ±20% a
				MIN a	MAX b				
KTKK0660	A	19.2 [.76]	6.2 [.24]	7 [.28]	5 [.2]	15 [.59]	1.0 [.04]	57 [2.24]	23 [.91]
KTKK0661	B	21.7 [.85]	9.3 [.37]	9 [.35]	6 [.24]	17 [.67]	1.0 [.04]	64 [2.52]	29 [1.14]
KTKK0662	C	25.5 [1.0]	12.9 [.51]	11 [.43]	7.2 [.28]	18 [.71]	1.0 [.04]	70 [2.76]	29 [1.14]
KTKK0663	D	29.3 [1.15]	14.1 [.56]	11 [.43]	7.2 [.28]	18 [.71]	1.0 [.04]	70 [2.76]	29 [1.14]
KTKK0664	E	31.9 [1.26]	18.8 [.74]	17 [.67]	8.5 [.33]	20 [.79]	1.0 [.04]	81 [3.19]	36 [1.42]
KTKK0665	F	35.7 [1.41]	18.8 [.74]	17 [.67]	8.5 [.33]	20 [.79]	1.0 [.04]	81 [3.19]	36 [1.42]
KTKK0666	G	38.2 [1.5]	23.6 [.93]	21 [.83]	10 [.39]	28 [1.1]	1.5 [.06]	97 [3.82]	45 [1.77]
KTKK0667	H	42 [1.65]	23.6 [.93]	21 [.83]	10 [.39]	28 [1.1]	1.5 [.06]	97 [3.82]	45 [1.77]
KTKK0668	J	44.6 [1.76]	30.9 [1.22]	29 [1.14]	15.8 [.62]	31 [1.22]	1.5 [.06]	118 [4.65]	59 [2.32]

THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.

COPYRIGHT 2016 By TE Connectivity

DIMENSIONS: mm [INCHES]	DWN P. VU	12OCT2016	MATERIAL	SEE NOTES	FINISH	SEE NOTES
	CHK N. NAGAR	12OCT2016				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. POPE	12OCT2016				
0 PLC ± -	PRODUCT SPEC	NAME				ADAPTOR ASSEMBLY
1 PLC ± -	—	SIZE				A4
2 PLC ± -	APPLICATION SPEC	CAGE CODE				00779
3 PLC ± -	—	DRAWING NO				C-KTKK0660-0668
4 PLC ± -	—	RESTRICTED TO				—
ANGLES ± -	WEIGHT	CUSTOMER DRAWING				SCALE DNS
		SHEET 1 OF 1		REV 6		