



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	2	RELEASED AS PER ECO-17-009529	30JUN2017	KH	MP

a) Part as supplied.

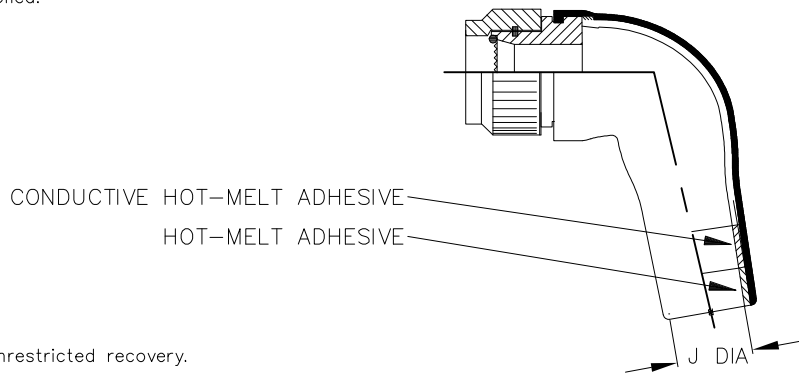

b) Part after unrestricted recovery.

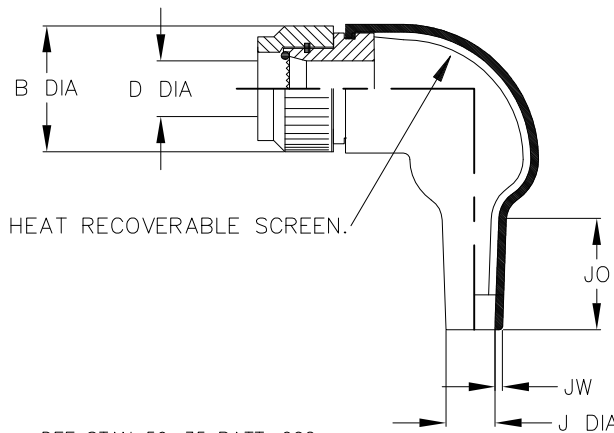

NOTES:

Connector Series: DEF STAN 59-35 PATT. 602  
 Adaptor Series: 201M1\*-19B (Olive Drab)  
 Aluminium Alloy to BS1474 HE30TF, FC1 or 6262  
 Cadmium per QQ-P-416, Type II, Class 3  
 Over appropriate under plate,  
 Per MIL-C-85049 (500 hour salt spray)

Moulded Part Material: -100C (Black); Polyolefin/Silver Composites, semi-flexible  
 ZEROHAL™ Low fire hazard

Kits to include cleaning tissue, 1 piece 100 grit emery cloth & packing piece.  
 Kit to be used in conjunction with installation guide for 90 & 45 deg. assemblies.

Dimensions in mm [inches for reference]

Part No.	Shell Size	B DIA MAX	D DIA MIN	J		JO REF b	JW ±30% b
				MIN a	MAX b		
KTKK1241	10	18.7 [.74]	8.7 [.34]	10 [.39]	6.0 [.24]	17 [.67]	1.0 [.04]
KTKK1242	12	21.8 [.86]	12.4 [.48]	12 [.47]	7.2 [.28]	18 [.71]	1.0 [.04]
KTKK1243	14	25.0 [.98]	14.0 [.55]	12 [.47]	7.2 [.28]	18 [.71]	1.0 [.04]
KTKK1244	16	28.3 [1.11]	17.2 [.67]	18 [.70]	8.5 [.33]	20 [.79]	1.0 [.04]
KTKK1245	18	31.0 [1.22]	19.2 [.75]	18 [.70]	8.5 [.33]	20 [.79]	1.0 [.04]
KTKK1246	20	34.2 [1.35]	22.4 [.88]	22 [.86]	10.0 [.39]	28 [1.10]	1.5 [.06]
KTKK1247	22	37.3 [1.47]	25.6 [1.01]	22 [.86]	10.0 [.39]	28 [1.10]	1.5 [.06]
KTKK1248	24	40.5 [1.59]	28.8 [1.13]	30 [.18]	15.8 [.62]	31 [1.22]	1.5 [.06]

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

COPYRIGHT 2016 By TE Connectivity

DIMENSIONS: mm [INCHES]	DWN K. HOLAL	14OCT2016	MATERIAL	SEE NOTES	FINISH	SEE NOTES	
	CHK N. NAGAR	14OCT2016	TE Connectivity				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. POPE	14OCT2016					
0 PLC ± -	PRODUCT SPEC	NAME	ADAPTOR ASSEMBLY				
1 PLC ± -	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
2 PLC ± -	APPLICATION SPEC	—	—	—	—		
3 PLC ± -	—	WEIGHT	A4	00779	C-KTKK1241-1248		
4 PLC ± -	—	—	CUSTOMER DRAWING				
ANGLES ± -	—	—	SCALE	DNS	SHEET	1 OF 1	
						REV	2