


REVISIONS				
REV	DESCRIPTION	DATE	DWN	APVD
AC	ECR-22-126298	11/01/2023	N.H	R.S
AD	CRN 26424	03/10/2023	C.W	R.S
AE	CRN 26424	13/09/2024	N.H	R.S

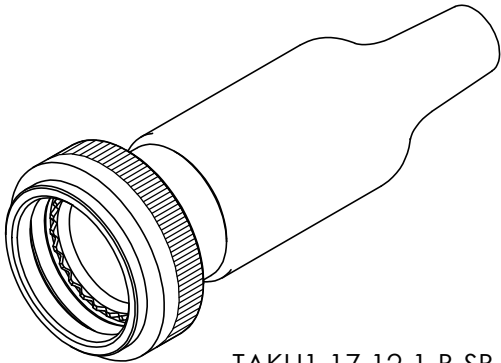

TAKH1-17-12-1-B-SB

- SERIES _____
CONNECTOR INTERFACE _____
ANGLE _____
1 - STRAIGHT
2 - 45 DEG
3 - 90 DEG
SHELL SIZE (SEE TABLE 1) _____
ENTRY SIZE (SEE TABLE 2) _____
MATERIAL (SEE TABLE 3) _____
FINISH (SEE TABLE 3) _____
BOOT OPTION _____
UB - ZERO HALOGEN BOOT - UNSCREENED (AVAILABLE ON ANGLES 1,2 & 3)
SB - ZERO HALOGEN BOOT (AVAILABLE ON ANGLES 1,2 & 3)
25AH - STRAIGHT DIESEL RESISTANT BOOT - UNSCREENED (ONLY AVAILABLE ON ANGLE 1)
25CH - STRAIGHT DIESEL RESISTANT BOOT (ONLY AVAILABLE ON ANGLE 1)
100DH - 45DEG ZERO HALOGEN BOOT (ONLY AVAILABLE ON ANGLE 1)
25DH - 45DEG DIESEL RESISTANT BOOT (ONLY AVAILABLE ON ANGLE 1)
100BH - 90DEG ZERO HALOGEN BOOT - UNSCREENED (ONLY AVAILABLE ON ANGLE 1)
100EH - 90DEG ZERO HALOGEN BOOT (ONLY AVAILABLE ON ANGLE 1)
25BH - 90DEG DIESEL RESISTANT BOOT - UNSCREENED (ONLY AVAILABLE ON ANGLE 1)
25EH - 90DEG DIESEL RESISTANT BOOT (ONLY AVAILABLE ON ANGLE 1)


1. THIS PRODUCT IS DESIGNED TO TERMINATE A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR.
2. BACKSHELL TO BE PERMANENTLY MARKED/BAGGED AND LABELLED WITH CODE IDENTIFICATION NUMBER AND PART NUMBER. (e.g. U5792-TAKH1-17-08-1-B).
3. BRAID TERMINATION MAY USE A TINEL-LOCK SHAPE MEMORY RING AT MANUFACTURERS DISCRETION.
4. BACKSHELL MATES TO MIL-DTL-38999, SERIES III AND IV, CLASS C, F, K, AND W, D38999/20, /24, /26, /40, /46 AND /47 CONNECTORS, AND WHEN SO MATED SHALL PROVIDE A WATER-TIGHT SEAL MEETING THE REQUIREMENTS OF MIL-C-85049, PARA. 3. 5. 7.
5. ALL BOOTS ARE SUPPLIED ADHESIVE LINED. PLEASE REFER TO INSTALLATION GUIDE ASQAW0201.
6. ASSEMBLY KIT TO INCLUDE ONE CLEANING TISSUE, ONE 100 GRIT EMERY CLOTH & DR25 HEATSHRINK TUBING PACKING PIECES, BAGGED SEPARATELY.


RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

COPYRIGHT 20 BY

THIS DRAWING IS UNPUBLISHED.

DIMENSIONS: MILLIMETERS	DWN: J.CLARK	04/10/2010	MATERIAL: SEE P/N BREAKDOWN		FINISH: SEE P/N BREAKDOWN				
	CHK: D.WRIGLEY	05/10/2020	TE TE Connectivity						
TOLERANCES UNLESS OTHERWISE SPECIFIED: GENERAL TOL LINEAR $\pm 0.25\text{MM}$ ANGULAR $\pm 1^\circ$	APVD: M.PAUL	06/10/2010					PART NUMBER:		TAKH SERIES
	PRODUCT SPEC:	-	NAME:		HEAT SHRINK BACKSHELL KIT				
	APPLICATION SPEC:		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
	WEIGHT:		A4	U5792	C-P13852				
		CUSTOMER DRAWING			SCALE	1.5:1	SHEET	1 OF 4	REV







RELEASED FOR PUBLICATION

THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.


COPYRIGHT 20 BY

REVISIONS

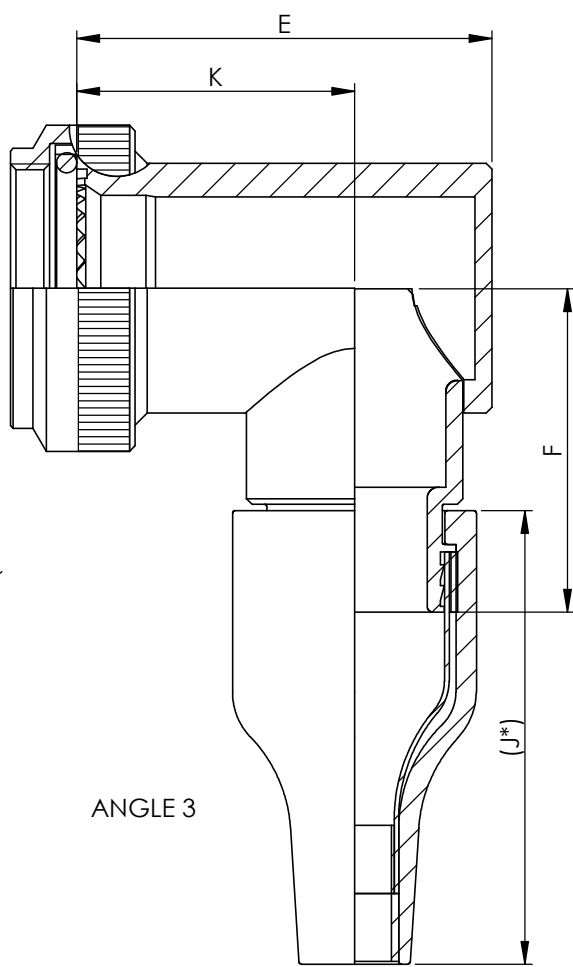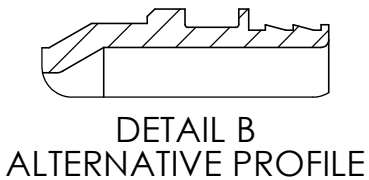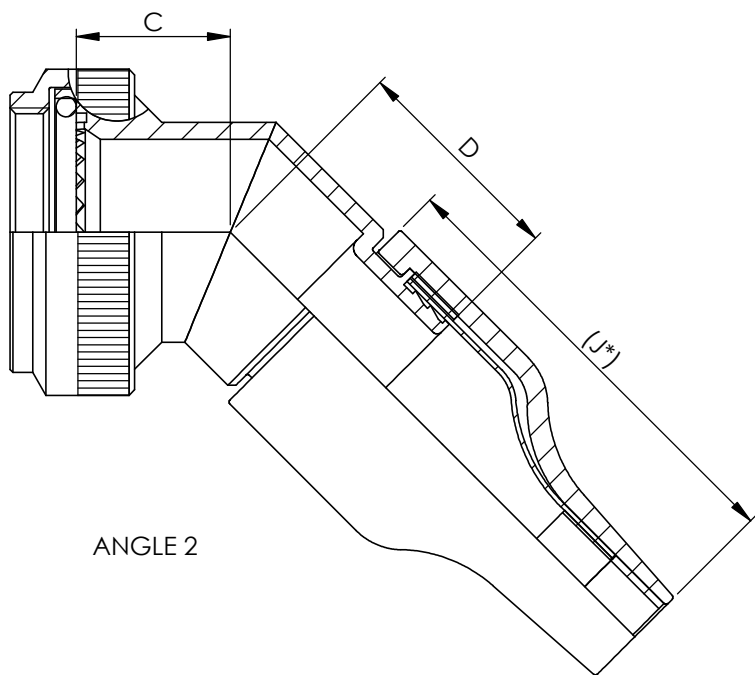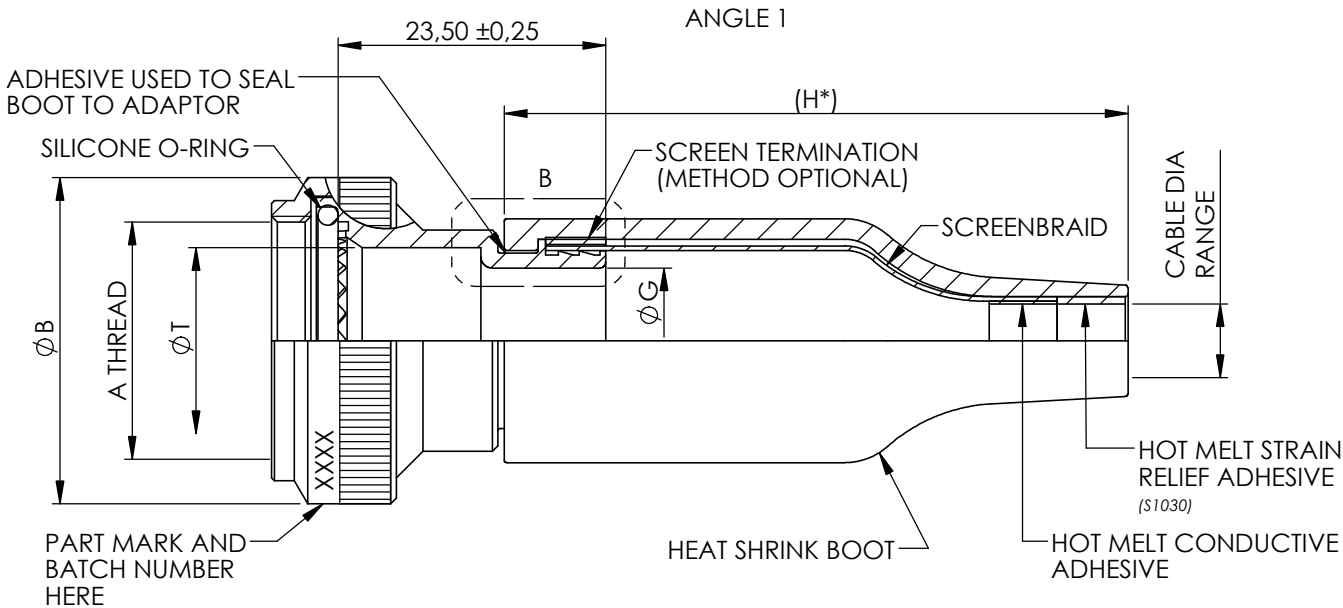


DIMENSIONS: MILLIMETERS	DWN: J.CLARK	04/10/2010	MATERIAL: SEE P/N BREAKDOWN		FINISH: SEE P/N BREAKDOWN	
	CHK: D.WRIGLEY	05/10/2020	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED: GENERAL TOL LINEAR ±0,25MM ANGULAR ±1°	APVD: M.PAUL	06/10/2010				
	PRODUCT SPEC: -	NAME: HEAT SHRINK BACKSHELL KIT				
	APPLICATION SPEC: -					
	 	WEIGHT:	SIZE A4	CAGE CODE U5792	DRAWING NO C-P13852	RESTRICTED TO
CUSTOMER DRAWING			SCALE 1.5:1	SHEET 2 OF 4	REV AE	


REVISIONS

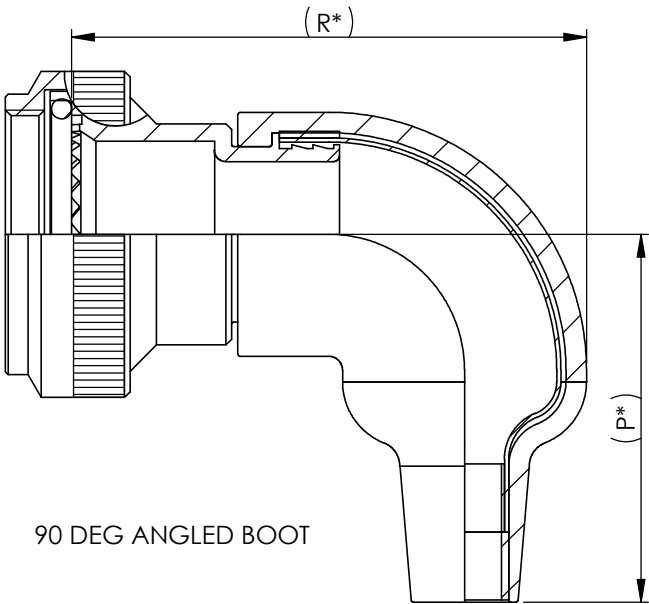

90 DEG ANGLED BOOT

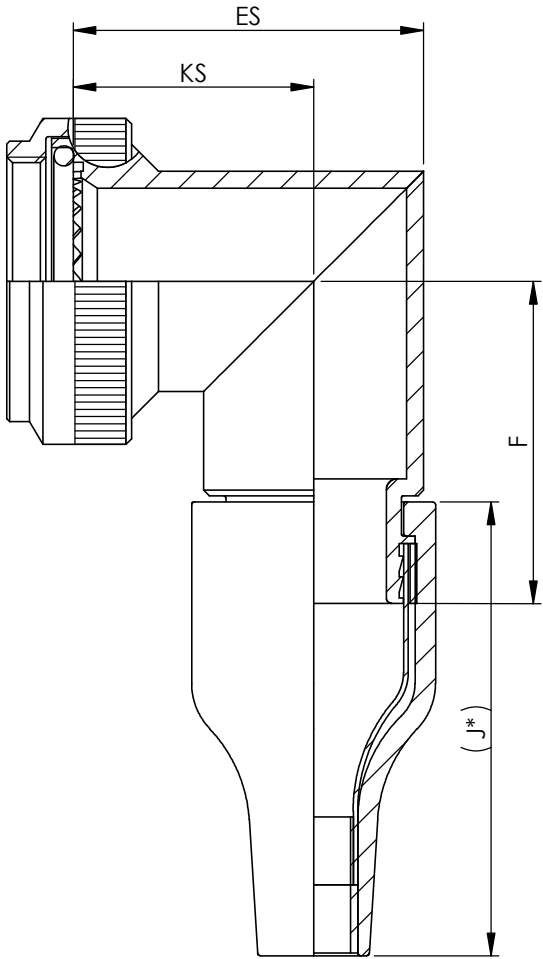

STAINLESS STEEL
NICKEL ALUMINIUM BRONZE
ANGLE 3

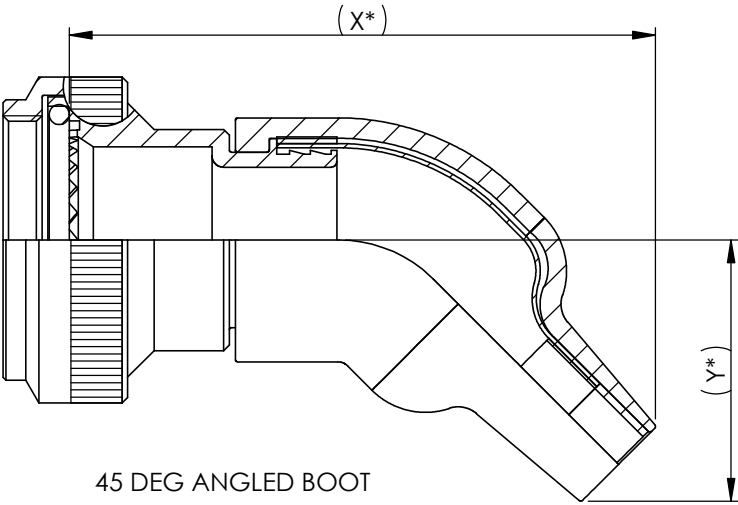

45 DEG ANGLED BOOT

***NOTE:**
'DIMENSIONS ONLY APPLY AFTER UNRESTRICTED RECOVERY - THE PART IS SUPPLIED WITH THE BOOT IN AN UN-RECOVERED STATE'

RELEASED FOR PUBLICATION

THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.

BY

20

BY

20

BY

20

BY

20

BY

20

BY

20

BY

20

BY

20


BY

20

DIMENSIONS:
MILLIMETERS

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

GENERAL TOL
LINEAR $\pm 0.25\text{MM}$
ANGULAR $\pm 1^\circ$



DWN: J.CLARK 04/10/2010

CHK: D.WRIGLEY 05/10/2020

APVD: M.PAUL 06/10/2010

PRODUCT SPEC:

APPLICATION SPEC:

WEIGHT:

CUSTOMER DRAWING

MATERIAL: SEE P/N BREAKDOWN

FINISH: SEE P/N BREAKDOWN



TE Connectivity

PART NUMBER:

TAKH SERIES

NAME:

HEAT SHRINK BACKSHELL KIT

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A4

U5792

C-P13852

SCALE 1.5:1

SHEET 3 OF 4

REV AE

REVISIONS

TABLE 1

SHELL SIZE	A THREAD	B MAX	T MIN	C MAX	D ±0,50	E MAX	F MAX	K ±0,50	ES MAX	KS ±0,50
09	M12 x 1,0	18,0	6,7	13,1	17,1	25,7	24,0	17,5	21,5	16,3
11	M15 x 1,0	21,0	10,2	13,9	18,2	26,7	25,7	17,5	24,6	17,2
13	M18 x 1,0	24,5	13,5	14,5	18,6	31,2	27,2	20,0	28,6	19,4
15	M22 x 1,0	29,0	16,2	15,5	19,5	37,2	28,7	24,5	31,3	21,0
17	M25 x 1,0	32,5	19,4	16,1	20,3	40,2	30,4	26,7	34,5	22,8
19	M28 x 1,0	35,5	21,8	16,8	20,8	44,7	32,0	27,0	38,7	25,3
21	M31 x 1,0	37,0	25,1	17,1	21,7	49,2	33,6	30,5	41,0	26,1
23	M34 x 1,0	40,0	28,2	17,7	22,0	51,7	35,1	31,5	43,9	27,6
25	M37 x 1,0	43,5	31,4	18,4	22,9	53,2	36,6	28,5	46,7	29,1

TABLE 2

ENTRY SIZE	ØG MIN	H MAX	J MAX	R MAX	P MAX	X MAX	Y MAX	CABLE DIA RANGE
05	7,9	60	40	45	35	70	35	4,5 - 9,0
08	12,7	60	40	50	40	80	40	6,0 - 12,0
10	15,8	72	48	55	50	90	45	7,5 - 15,0
12	19,0	72	48	60	55	100	55	9,0 - 18,0
16	25,4	95	55	65	65	110	65	10,0 - 25,0
20	31,8	125	70	65	65	120	65	12,5 - 30,0
24	38,1	125	70	75	90	130	75	15,0 - 36,0

TABLE 3

MATERIAL / FINISH	DESCRIPTION
1-B	ALUMINIUM ALLOY - CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL
1-C	ALUMINIUM ALLOY - ELECTROLESS NICKEL
2-Z	NICKEL ALUMINIUM BRONZE - SHOTBLAST
4-J	STAINLESS STEEL - PASSIVATE

RELEASED FOR PUBLICATION


THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.

BY



20

DIMENSIONS: MILLIMETERS	DWN: J.CLARK	04/10/2010	MATERIAL: SEE P/N BREAKDOWN		FINISH: SEE P/N BREAKDOWN		
	CHK: D.WRIGLEY	05/10/2020	 TE Connectivity				
	APVD: M.PAUL	06/10/2010					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: GENERAL TOL LINEAR ±0,25MM ANGULAR ±1°	PRODUCT SPEC:		PART NUMBER: TAKH SERIES			
		APPLICATION SPEC:		NAME: HEAT SHRINK BACKSHELL KIT			
WEIGHT:		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
	CUSTOMER DRAWING		A4	U5792	©-P13852		
			SCALE	1.5:1	SHEET	4 OF 4	
				REV	AE		