
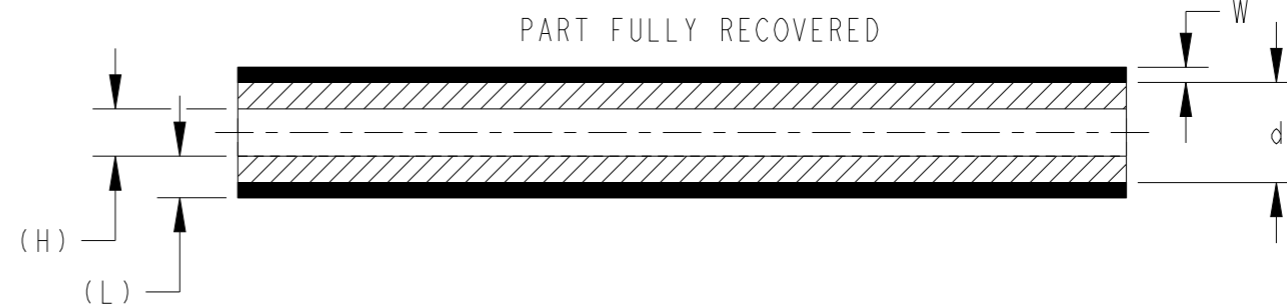


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	16MAY2023	BDA	MB

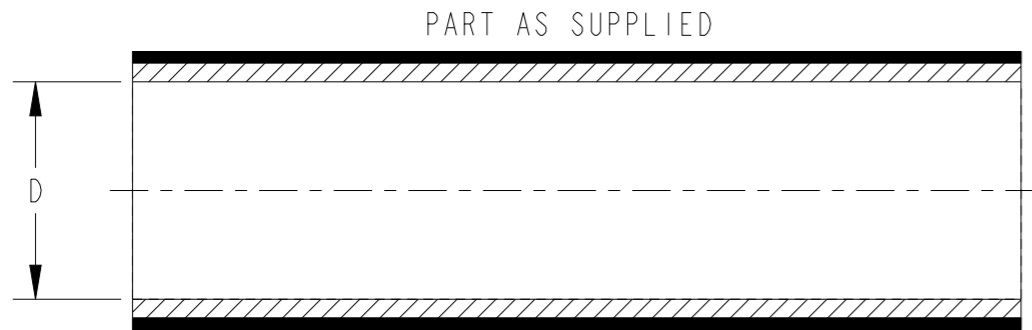

PRODUCT DIMENSIONS

PART NO	AS SUPPLIED		AS RECOVERED							
	MINIMUM EXPANDED I.D. (D)		JACKET & LINER DIA (H)		MAXIMUM RECOVERED JACKET I.D. (d)		MINIMUM RECOVERED JACKET WALL (W)		MINIMUM RECOVERED TOTAL WALL (L)	
	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.
QSZH-125-NR1	5.75	0.226	1.25	0.049	2.65	0.104	0.60	0.024	1.10	0.043
QSZH-125-NR2	7.50	0.295	1.65	0.065	3.45	0.136	0.70	0.028	1.40	0.055
QSZH-125-NR3	11.00	0.433	2.40	0.094	4.65	0.183	0.80	0.031	1.80	0.071
QSZH-125-NR3A	14.00	0.551	3.00	0.118	5.90	0.232	0.90	0.035	2.15	0.085
QSZH-125-NR4	18.30	0.720	4.35	0.171	7.40	0.291	0.90	0.035	2.20	0.087

PRODUCT INFORMATION


- NON-FLAME RETARDANT
- OUTER JACKET: IRRADIATED MODIFIED POLYOLEFIN COLOUR: CLEAR
INNER LINER: THERMOPLASTIC HOT-MELT ADHESIVE COLOUR: BLACK
- SHRINK RATIO 4:1
- TUBING CUT TO SPECIFIC LENGTHS CAN BE SUPPLIED FROM THE PRODUCT SIZES REFERENCED WITHIN THIS DRAWING
- DIMENSION H & L (JACKET & LINER) VALUE IS FOR REFERENCE ONLY

STANDARD CUTTING TOLERANCES (mm)

CUT LENGTH	TOLERANCE
UPTO TO 9.90mm	±1.50mm
10mm TO 24.90mm	±1.50mm
25mm TO 54.90mm	±1.50mm
55mm TO 99.90mm	±3.00mm
100mm TO 149.90mm	±4.00mm
150mm TO 499.90mm	±5.00mm
500mm AND GREATER	±25.40mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm (Inches)



MATERIAL
SEE NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±0.1
2 PLC ±0.01
3 PLC ±0.001
4 PLC ±0.0001
ANGLES ±
FINISH -

DWN	16MAY2023
CHK	BASAVARAJA D A
APVD	16MAY2023
NAME	SELVAPANDIAN B
PRODUCT SPEC	MAYO BAKARE
APPLICATION SPEC	108-120002
WEIGHT	-
CUSTOMER DRAWING	-



THERMOFIT QSZH-125 TUBING
DUAL WALL, HEAT-SHRINKABLE,
NON-FLAME RETARDED TUBING

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	QSZH-125	-
SCALE	NTS	SHEET	1 OF 1
REV	A		