

REVISIONS







P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	ECR-21-111798	02SEP2021	WQR	CW
	C1	ECR-22-152753	20SEP2022	WQR	CW
	C2	ECR-24-202368	12MAR2024	RW	CW
	D	ECR-24-228547	05DEC2024	QH	BR

NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40^{\circ}C \sim +125^{\circ}C$
WIRE RANGE: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
CONTACT TYPE: CRIMP CONTACT
- CONTACTS NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20300X10XX000)

注释:

- 技术参数:
绝缘材料: PC
额定电压: 400V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40^{\circ}C \sim +125^{\circ}C$
接线范围: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20300X10XX000)

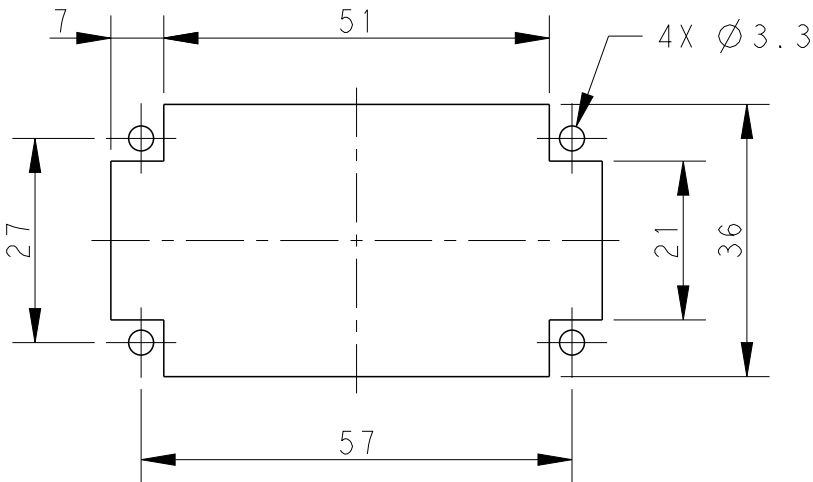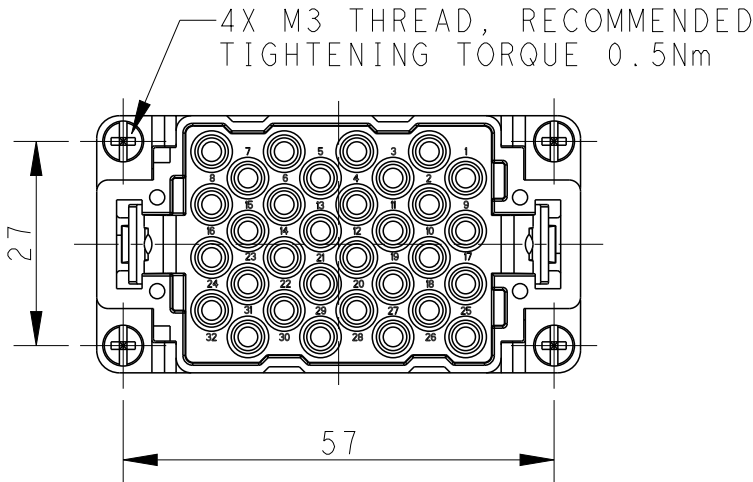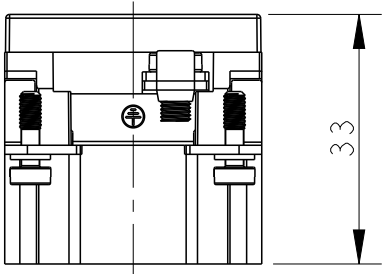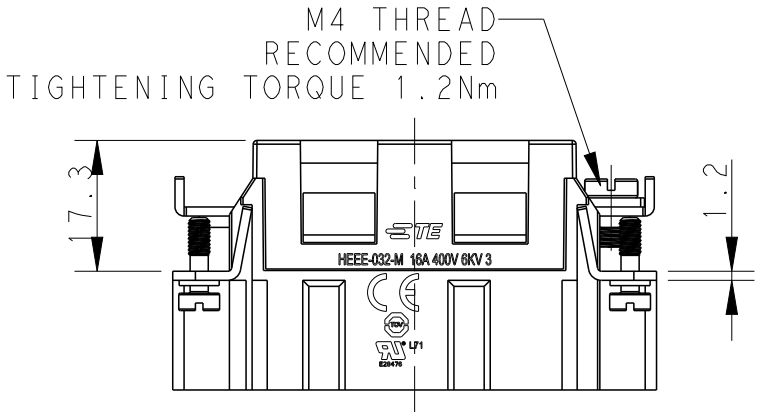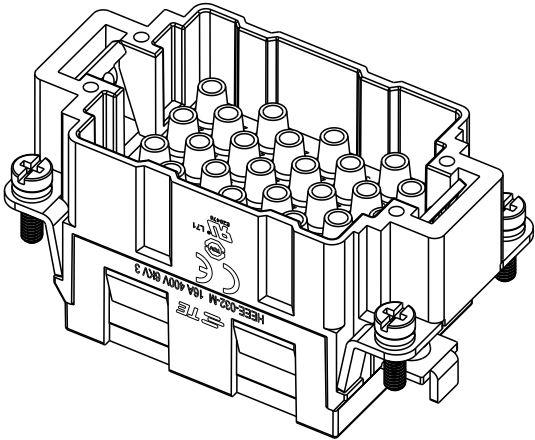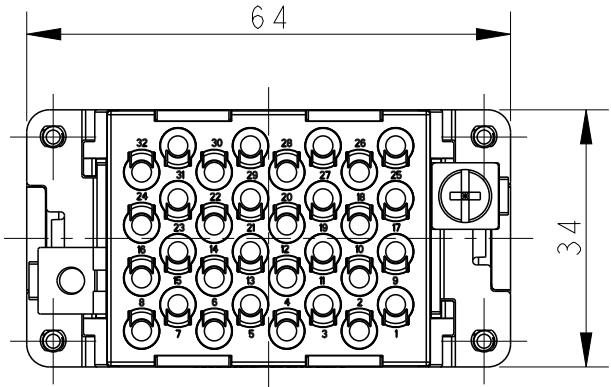


PANEL CUT FOR INSERTS FOR USE WITHOUT HOODS/ HOUSINGS

TYPE I, T2050323101-000
类型 I, T2050323101-000

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC $\pm$
1 PLC $\pm$
2 PLC $\pm$
3 PLC $\pm$
4 PLC $\pm$
ANGLES $\pm$

MATERIAL

-

FINISH

-

DWN 18DEC2014

RAGHAVENDRA H M

CHK 18DEC2014

CHRIS WANG

APVD 18DEC2014

XU XIANG

PRODUCT SPEC

108-137068

APPLICATION SPEC

114-137068

WEIGHT

-

Customer Drawing



TE Connectivity

NAME

HEEE-032-M

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C-T2050323101000

-

SCALE

1:1



SHEET

1 OF 3


REV

D



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

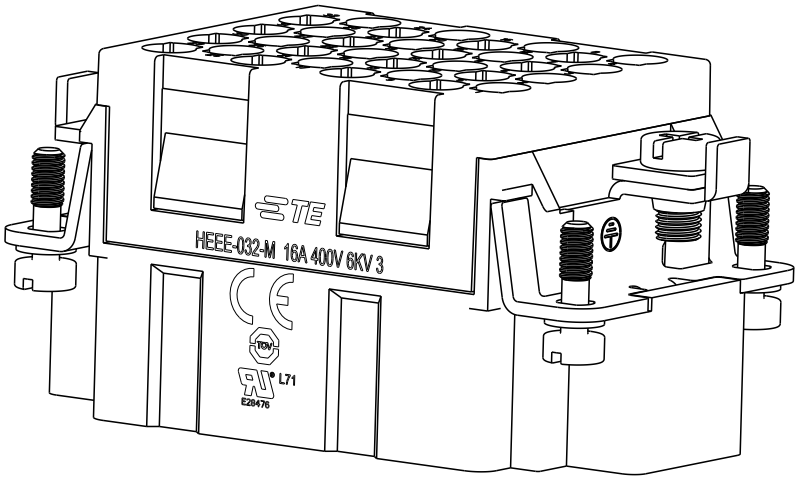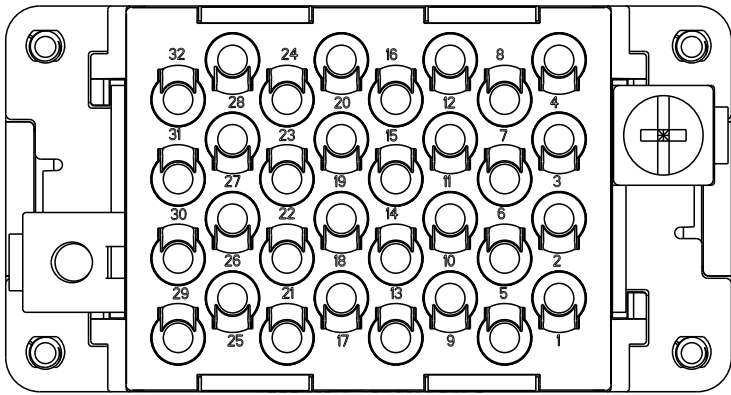

SCALE 3:2

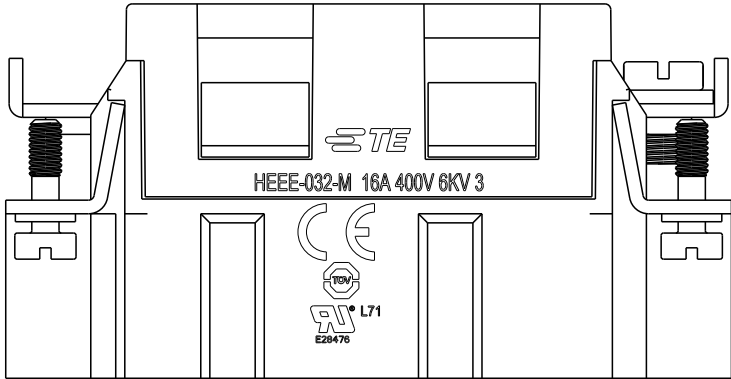


SCALE 3:2

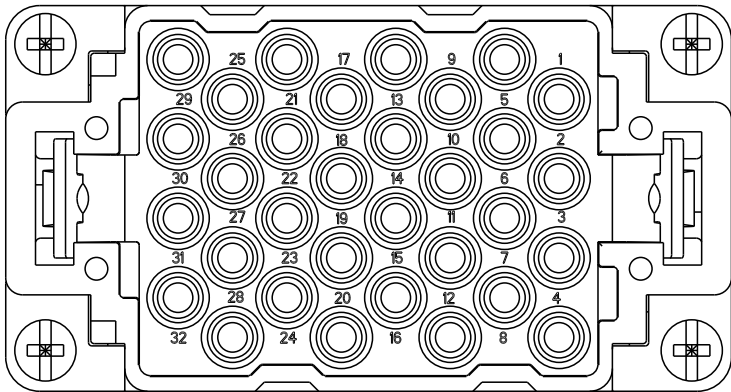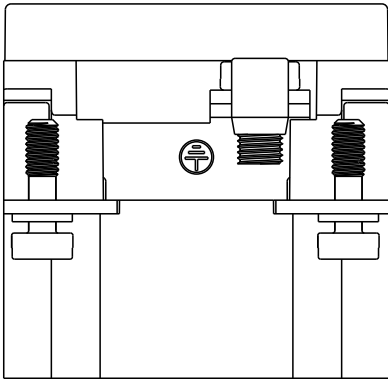



NOTES:
LASER PRINT MARKINGS SEE THIS SHEET,
OTHER SPEC REFER TO TYPE I.

注释：
激光打标参照此页，其余产品规范参照类型 I。

TYPE 2,T2050323101-001
类型 2,T2050323101-001




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA H M 18DEC2014	 TE Connectivity											
		CHK CHRIS WANG 18DEC2014												
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD XU XIANG 18DEC2014	NAME HEEE-032-M											
	0 PLC ±-	PRODUCT SPEC 108-137068	SIZE CAGE CODE DRAWING NO RESTRICTED TO											
	1 PLC ±-	APPLICATION SPEC 114-137068							A300779C-T2050323101000 - -					
	2 PLC ±-													
3 PLC ±-														
4 PLC ±-														
ANGLES ±-														
MATERIAL - -	FINISH - -	WEIGHT -	Customer Drawing				SCALE 1:1	SHEET 2 OF 3	REV D					

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

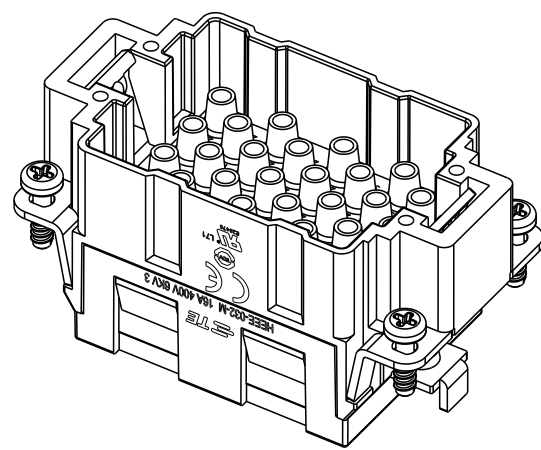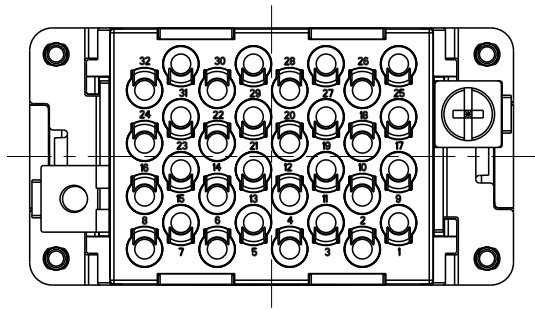


NOTES:
4X M3 SELF-TAPPING SCREW SEE THIS SHEET,
OTHER SPEC REFER TO TYPE 1.

注释:
4X M3 自攻螺丝参照此页, 其余产品规范参照类型 1.

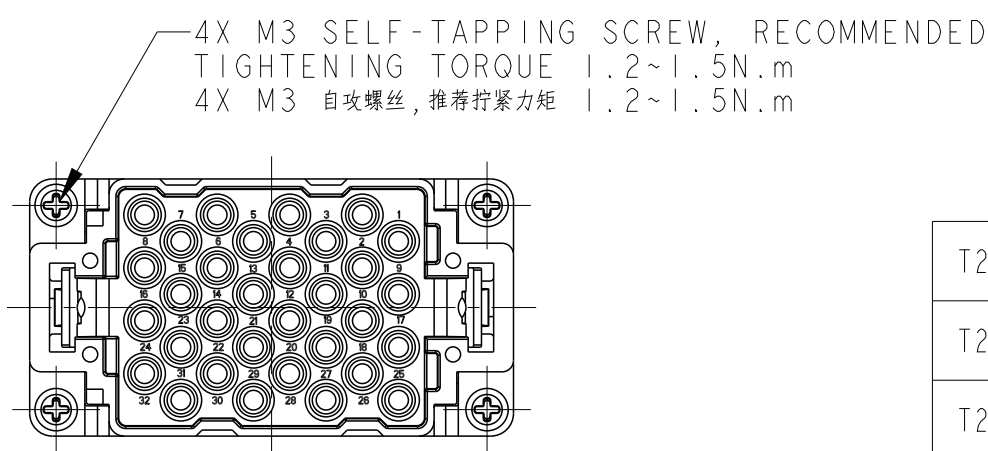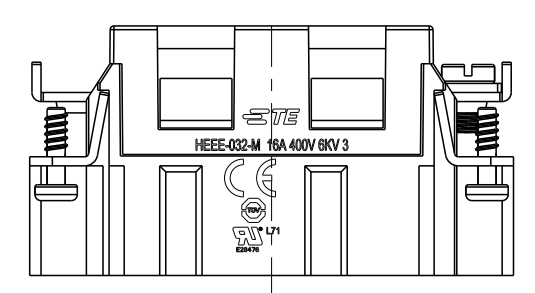

TYPE 3,T2050323101-002
类型 3,T2050323101-002

T2050323101-002	HEEE-032-M	HEEE-032 MALE INSERT,SELF-TAPPING HEEE-032公插, 自攻螺丝	TYPE-3 类型-3
T2050323101-001	HEEE-032-M	HEEE-032 MALE INSERT WITH STAINLESS STEEL SCREW HEEE-032公插, 带不锈钢螺丝	TYPE-2 类型-2
T2050323101-000	HEEE-032-M	HEEE-032 MALE INSERT HEEE-032公插	TYPE-1 类型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA H M 18DEC2014	 TE Connectivity					
		CHK CHRIS WANG 18DEC2014						
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD XU XIANG 18DEC2014	NAME HEEE-032-M					
	0 PLC ±-	PRODUCT SPEC 108-137068	SIZE A300779					
	1 PLC ±-	APPLICATION SPEC 114-137068					DRAWING NO C-T2050323101000	
	2 PLC ±-							
3 PLC ±-			RESTRICTED TO -					
4 PLC ±-								
ANGLES ±-								
MATERIAL - -	FINISH - -	WEIGHT -	Customer Drawing			SCALE 1:1	SHEET 3 OF 3	REV D