

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -


ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	22DEC2017	YC	CW

ASSEMBLY STATE OF THE PRODUCT, FOR REFERENCE

产品装配状态, 供参考

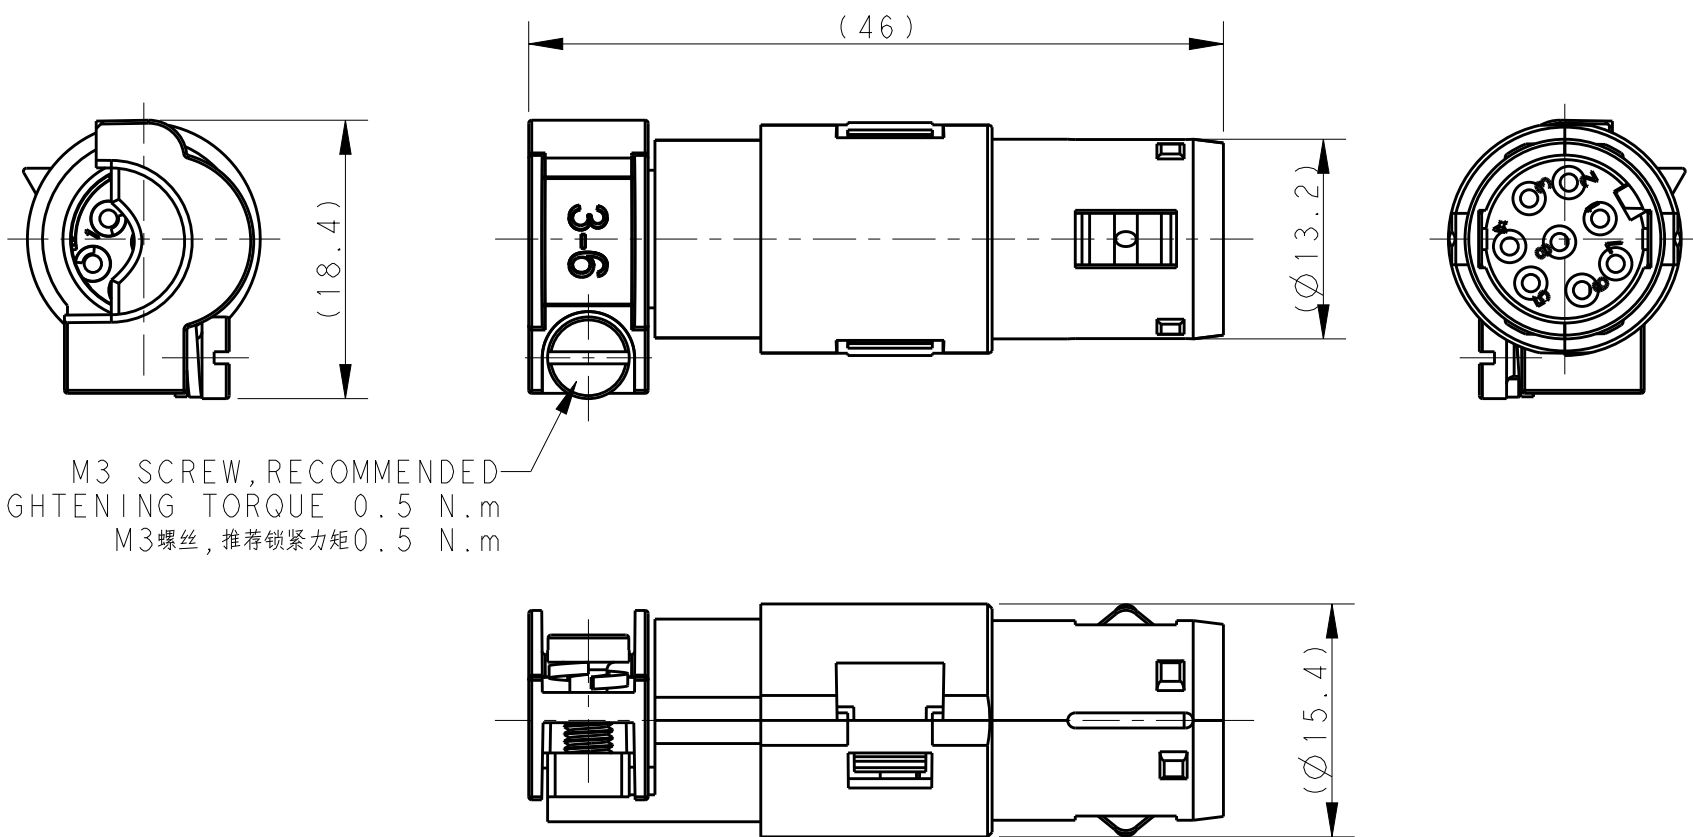

M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5 N.m
M3螺丝, 推荐锁紧力矩0.5 N.m

NOTES:


- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 50V
RATED CURRENT: 5A
RATED IMPULSE VOLTAGE: 0.8KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
WIRE RANGE: 0.08-0.52 mm² (28-20 AWG)
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20700X20XX000)

注释:

- 技术参数:
绝缘材料: PC
额定电压: 50V
额定电流: 5A
额定脉冲电压: 0.8KV
污染等级: 3
阻燃等级: UL94V-0
接线范围: 0.08-0.52 mm² (28-20 AWG)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20700X20XX000)

FOR Ø6-9.5mm CABLE
用于直径 Ø6-9.5mm 电缆线


FOR Ø3-6mm CABLE
用于直径 Ø3-6mm 电缆线

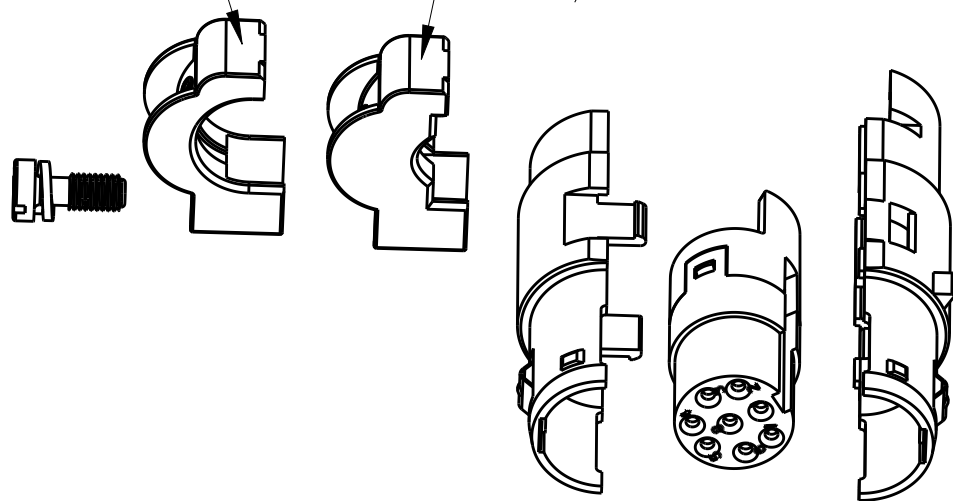

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL

-

FINISH

-

DWN 22DEC2017

YORK CHEN

CHK 22DEC2017

GINO YAO

APVD 22DEC2017

CHRIS WANG

PRODUCT SPEC

108-137067

APPLICATION SPEC

114-137067

WEIGHT

-

CUSTOMER DRAWING

T2580082154-007

PIN-Q3-F

QUINTAX FEMALE CONTACT 8-POS
QUINTAX 8-POS 母针

PART NUMBER

料号

PART DESCRIPTION

描述

TE

TE Connectivity

NAME

QUINTAX CONTACT 8-POS
PIN-Q3-F

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-T2580082154007

-

SCALE

2:1

SHEET

1 OF 1

REV

A