



410-420 MHz 3 dBd GAIN OMNIDIRECTIONAL ANTENNA

FG4103

FIBERGLASS BASE STATION ANTENNAS FEATURE COMPONENTS THAT PERFORM IN EXTREME CONDITIONS

The FG4103 omnidirectional base station antenna incorporates a collinear design that is enclosed in high density fiberglass, which is covered with a protective ultraviolet inhibiting coating. The radiating elements are carefully phased to provide maximum gain in the horizontal plane. The mounting sleeves are tuned to eliminate RF currents from the transmission line, resulting in a “cold” sleeve that allows for greater freedom in mounting. The antenna’s high quality and well-focused beam provides the best efficiency with highest gain.

FEATURE

- High gain 3 dBd (5dBi)
- Every FG fiberglass base antenna is tested on a network analyzer before shipping to assure the best performance
- Custom UV protection coating
- Durable gold anodized sleeve and cap with N-female connector

MARKETS

- Omnidirectional outdoor antenna applications used in commercial, public safety, and government applications around the globe
- Typical applications include land based and marine radio and voice and data transmission

ELECTRICAL SPECIFICATIONS

Model	FG4103
Frequency Range (MHz)	410 - 420 MHz
Peak Gain	5 dBi
Elevation Beamwidth at Half-Power	40 Deg
Azimuth Beamwidth at Half-Power	360 Deg


MECHANICAL SPECIFICATIONS

Height	44 in (190.5 cm)
Diameter	1.31 in (3.33 cm)
Weight	2.34 lbs (1.06 kg)
Operational Temp	-31o F to +176o F -35o C to +80o C
Storage Temp	-31o F to +176o F -35o C to +80o C
Rated Wind Velocity	125 mph (210 kph)
Rated Wind Velocity w/0.5" radial ice	85 mph (137 kph)

TECHNICAL DATA

Pattern	Omni-Directional
Maximum Power	100 Watts
Nominal	50 Ohm
Polarization	Vertical
VSWR	<2.0:1
Termination	N-Female
Mounting Information	FM2 Optional (Sold separately
Cable Length	N/A
Outdoor Rated	Yes
Color	White Radome/Gold Sleeve
Radome Material	UV Treated Fiberglass

RADIATION PATTERN

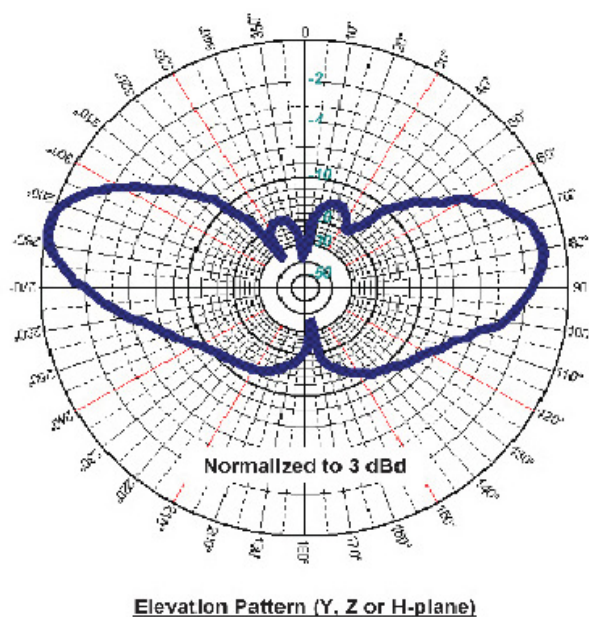

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original